


## HC-B 24-AMQ-EMV

Order No.: 1642962

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1642962>

HEAVYCON panel mounting base B24, with double locking latch,  
EMC version. Not suitable for D series terminal adapters

### Commercial data

GTIN (EAN)	 4 046356 028608
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 519 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
07/03/2006



[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

### Technical data


#### General data

Note	For contact inserts HC-B24, BB46, D64, DD108, M
Design	B24
Height	30.5 mm
Width	48 mm

Length	140 mm
Housing type	EMC housings
Locking type	With double locking latch
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 100 °C
Housing material	Aluminum, die-cast
Housing surface material	EMC coating, silver
Seal material	NBR, conductive
Material lock	Steel, galvanized
Length of the assembly cutout	108 mm
Width of the assembly cutout	35 mm
Assembly instructions	Cannot be used for HC-D... series terminal adapters.
Connection	If insulating powder coating is present on the control cabinet panel, it should be removed from the profile gasket area in order to ensure optimum shielding.


### Diagrams/Drawings

#### Diagram


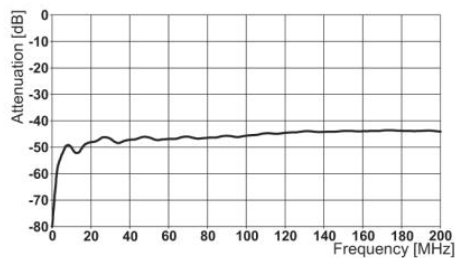


Shield attenuation

#### Dimensioned drawing



Dimensional drawing

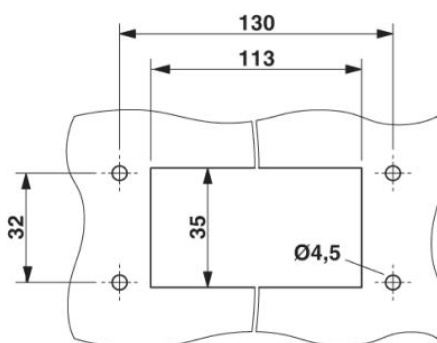

Panel cutout

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;