


A

A

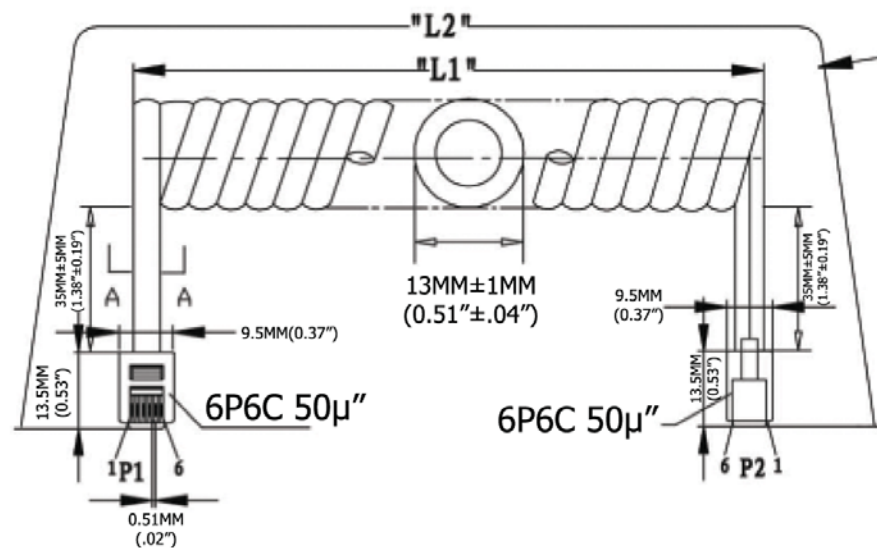

Extended length is with 500g of force

B


B

C

C

D

D

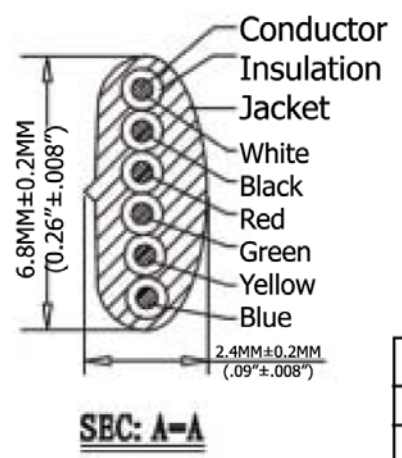

P1	P2
1	6
2	5
3	4
4	3
5	2
6	1

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	53.5 Inches
4,267.2MM-4,907.28MM	1,358.9MM

- Material:**
- Plug Housing: Polycarbonate, clear
 - Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
 - Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
 - Conductor(X6C): 26AWG (0.12X12) Bare Copper
 - Insulation(X6C): PP6331 ID 0.95-1.0
 - Jacke: PVC No UL 80 P
 - Package: Individual PE Bag

F

F

G

G

H

H



Scale	1:1							Name	Item No. AT-C-26-6/6/W-14
TOLERANCE				Drawn	11.02.11	Chappell			
X.X	±0.40			Approved				Title	NON-UL 26 AWG (0.12X12)*6C, O.D.: 2.4*6.8MM, Standard Plug, 50µ" of contact plating, WHITE
X.XX	±0.25							Drawing No.	
X.XXX	±0.15							Replace	rev00
Angle	±3°								

