

Front horizontal rail, with 10 mm extension (B2), with double screw fastening



For type IV, IVs and VII injector/extractor handle

To accommodate guide rails and for the attachment of front panels. The double screw fastening ensures a high level of stability even under extreme loads.

- Load test to DIN EN/IEC 61 587-1, requirement level SL1
- Shock and vibration tests undertaken as per IEC 61 373 (DIN EN 50 155), Category 1, Class B
- Front projection and pitch pattern of holes based on IEC 60 297-3-101
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material:

Extruded aluminum section

Surface finish:

Clear-chromated



Usable width (HP)	Packs of	Order No.
84	1	9908.722

! Also required:

Assembly screws M4 x 12, packs of 100, order no. 3654.300, see page 164

+ Accessories:

Threaded inserts, order no. 3684.610 (packs of 1), see page 114

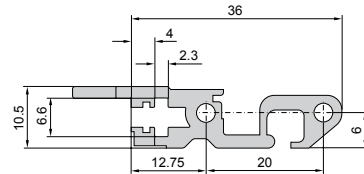

Rear horizontal rail (C1)



To accommodate guide rails and for the attachment of Z rails, insulating strips or conductive strips.

- Tapped holes M2.5 on a 1 HP pitch pattern
- HP pitch pattern of holes for the precise installation of guide rails
- M2.5 thread for the installation of Z rails or insulating / conductive strips
- M4 thread on end face
- Straight-through core hole
- Horizontal rail 192 HP without machining on the end faces. Suitable for cutting to length

Material:

Extruded aluminum section

Surface finish:

Clear-chromated or anodized

Usable width (HP)	Packs of	Order No.
21	1	3685.991
40	1	3684.962
42	1	3684.570
63	1	3684.571
84	1	3684.572
84	2	3685.268 ¹⁾
192	1	3688.002 ²⁾

¹⁾ Including 4 assembly screws

²⁾ Anodised

! Also required:

Assembly screws M4 x 12, packs of 100, order no. 3654.300, see page 164

