used for: D-SUB H

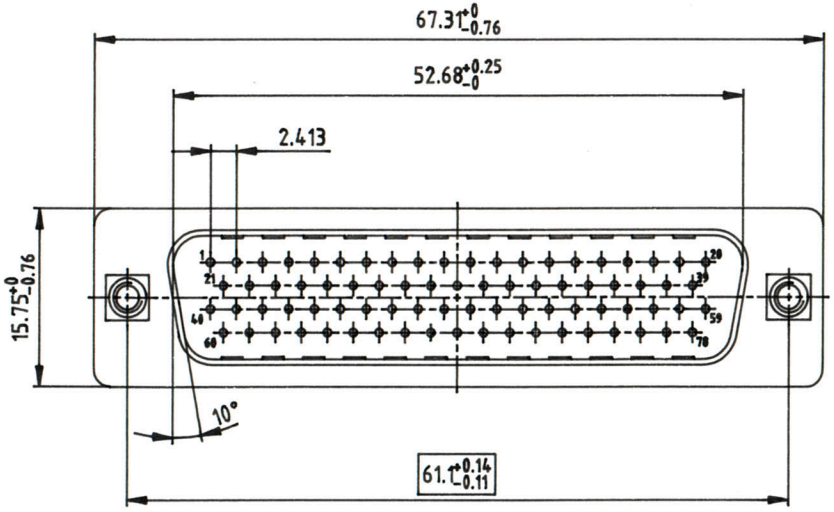

P.C.B. HOLE DRILLINGS

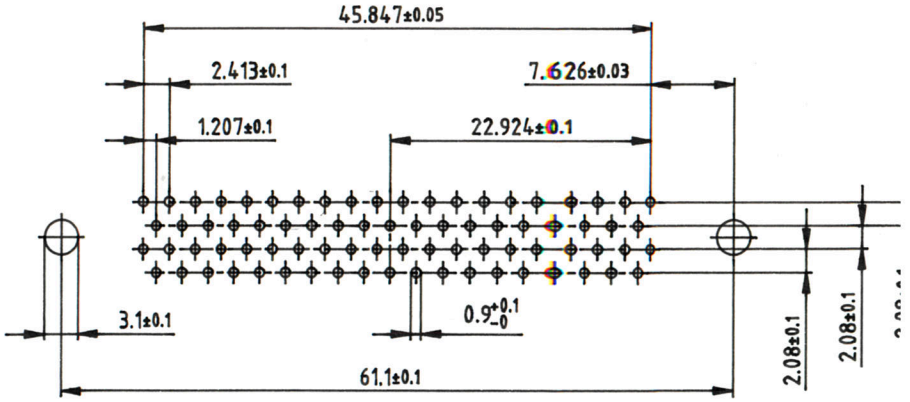

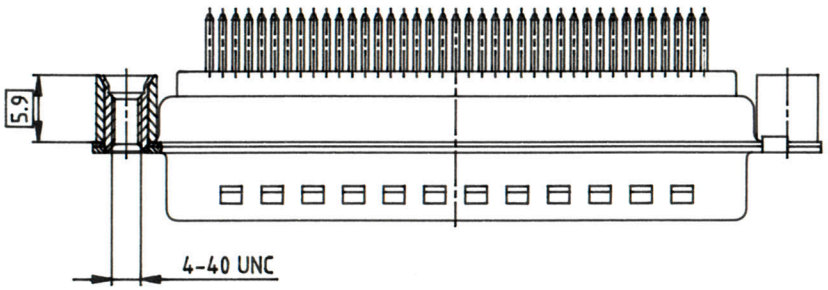

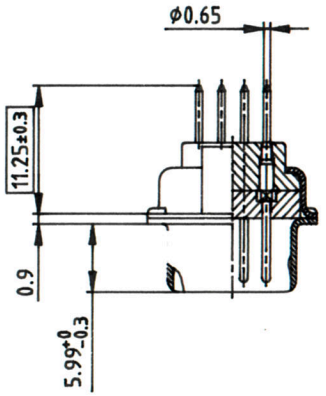

NOTES:
1. METALSHELLS: STEEL; TIN PLATED
2. INSULATORS: PBT GF; UL 94 V-0; BLACK
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 8µ" HARD GOLD OVER min. 50µ
5. MAXIMUM TORQUE VALUE FOR THREAD: 6" LI
6. ☐ = CRITICAL DIMENSION: SPC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

CONEC CORPORATION
BRAMPTON, ONTARIO

rev.	description	date	name

tolerance

1999	date	name
drawn	05.10.	Barcinski
appd.	05.10.	Mickenbecker
norm		
d-old		

scale: 2:1
material: SEE NOTES

title:
D-SUB HD MALE
SOLDER PIN STRAIGHT 78p
WITH THREADED REAR SPA

dwg no: CAD/ REL.1
16K1IKSA

product no: 163A04079A