

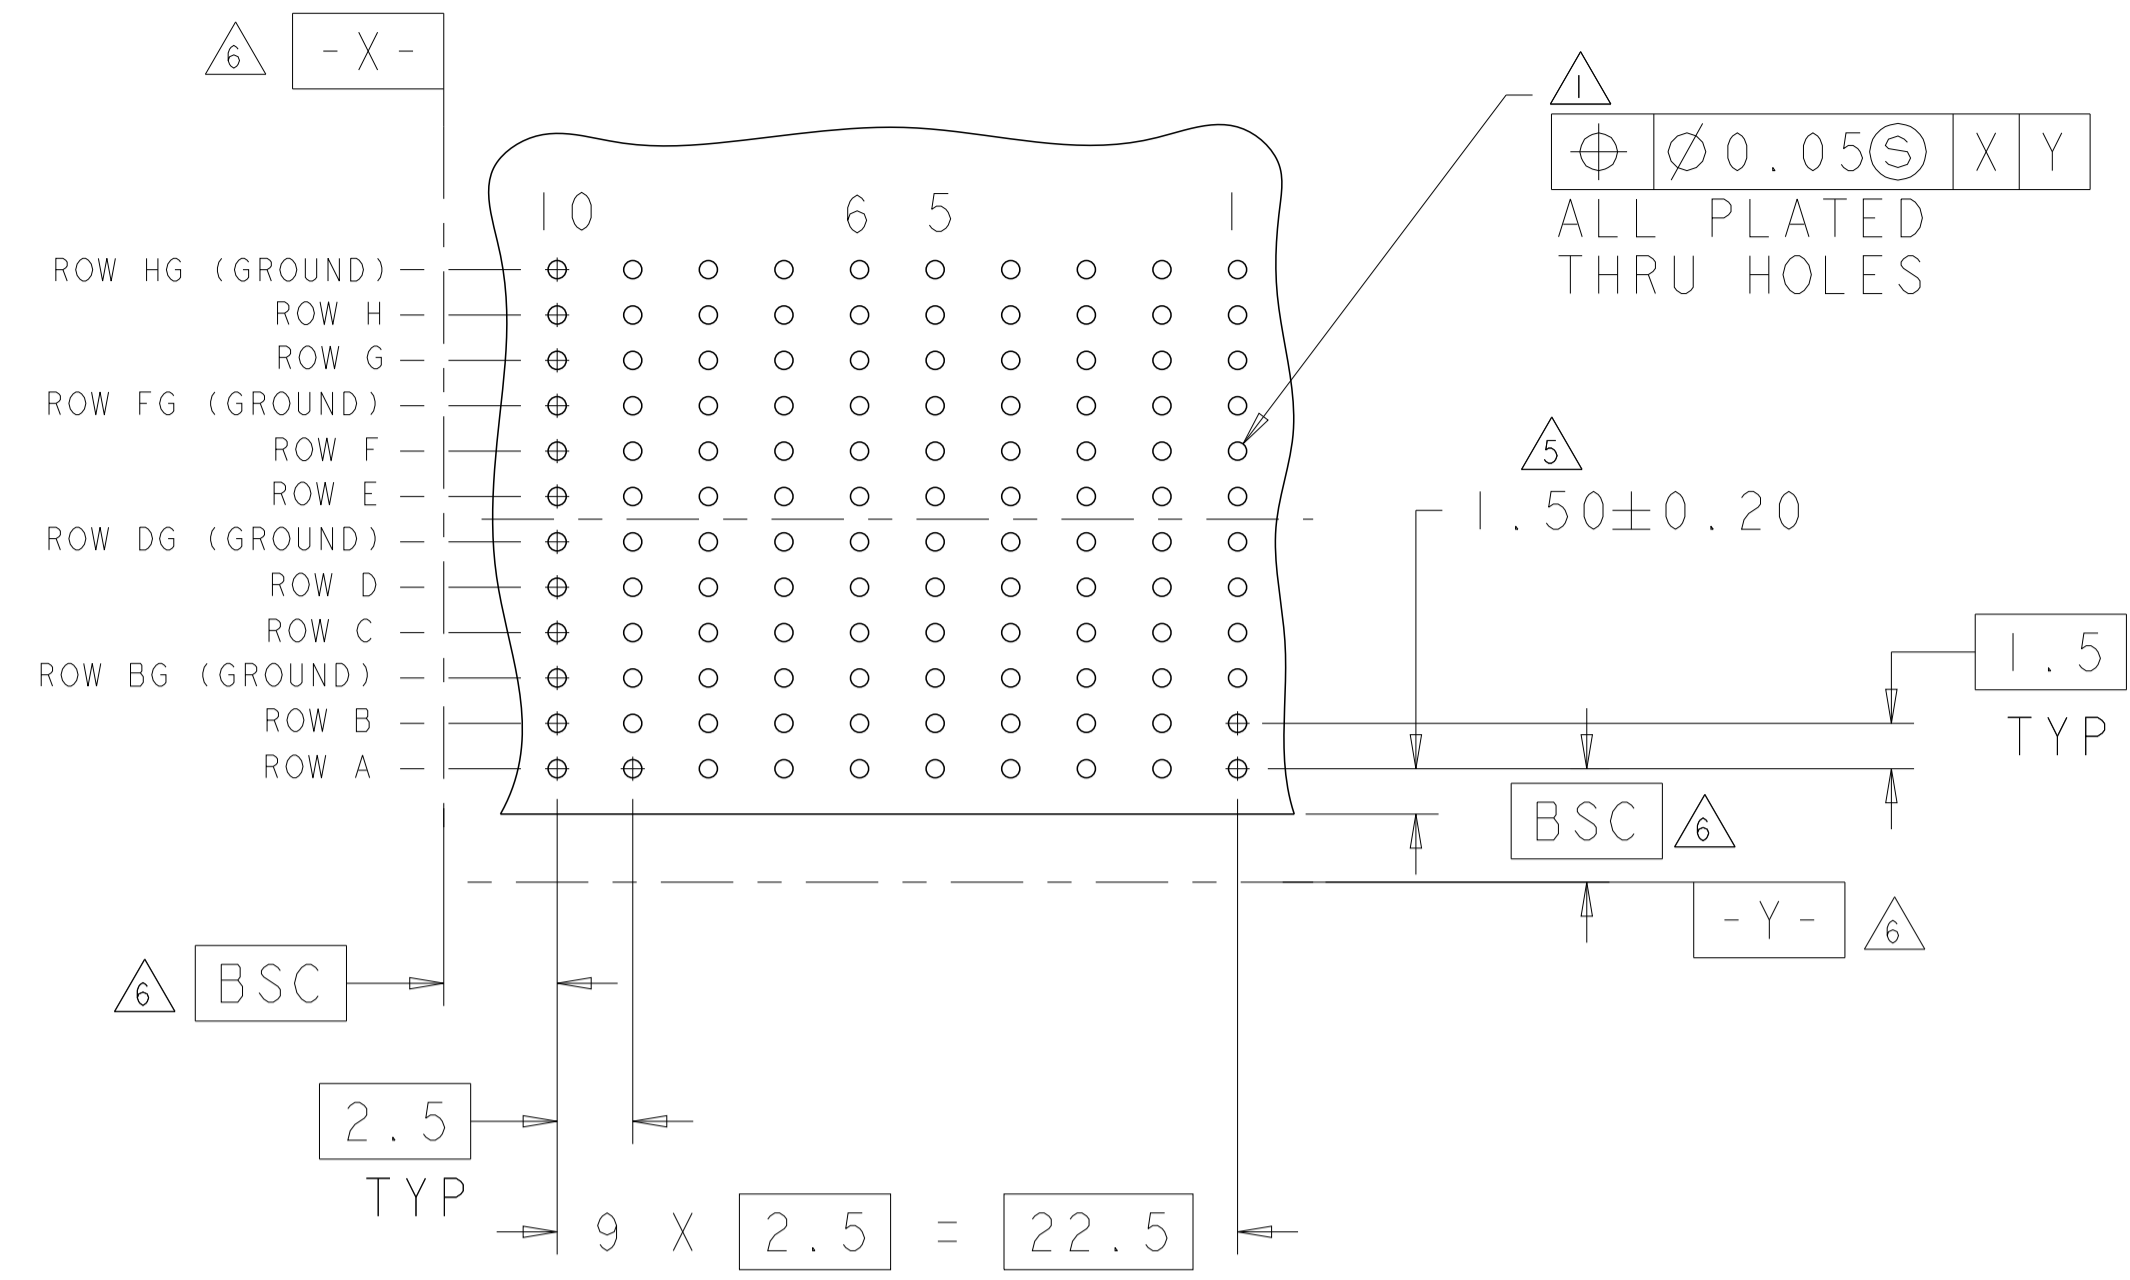
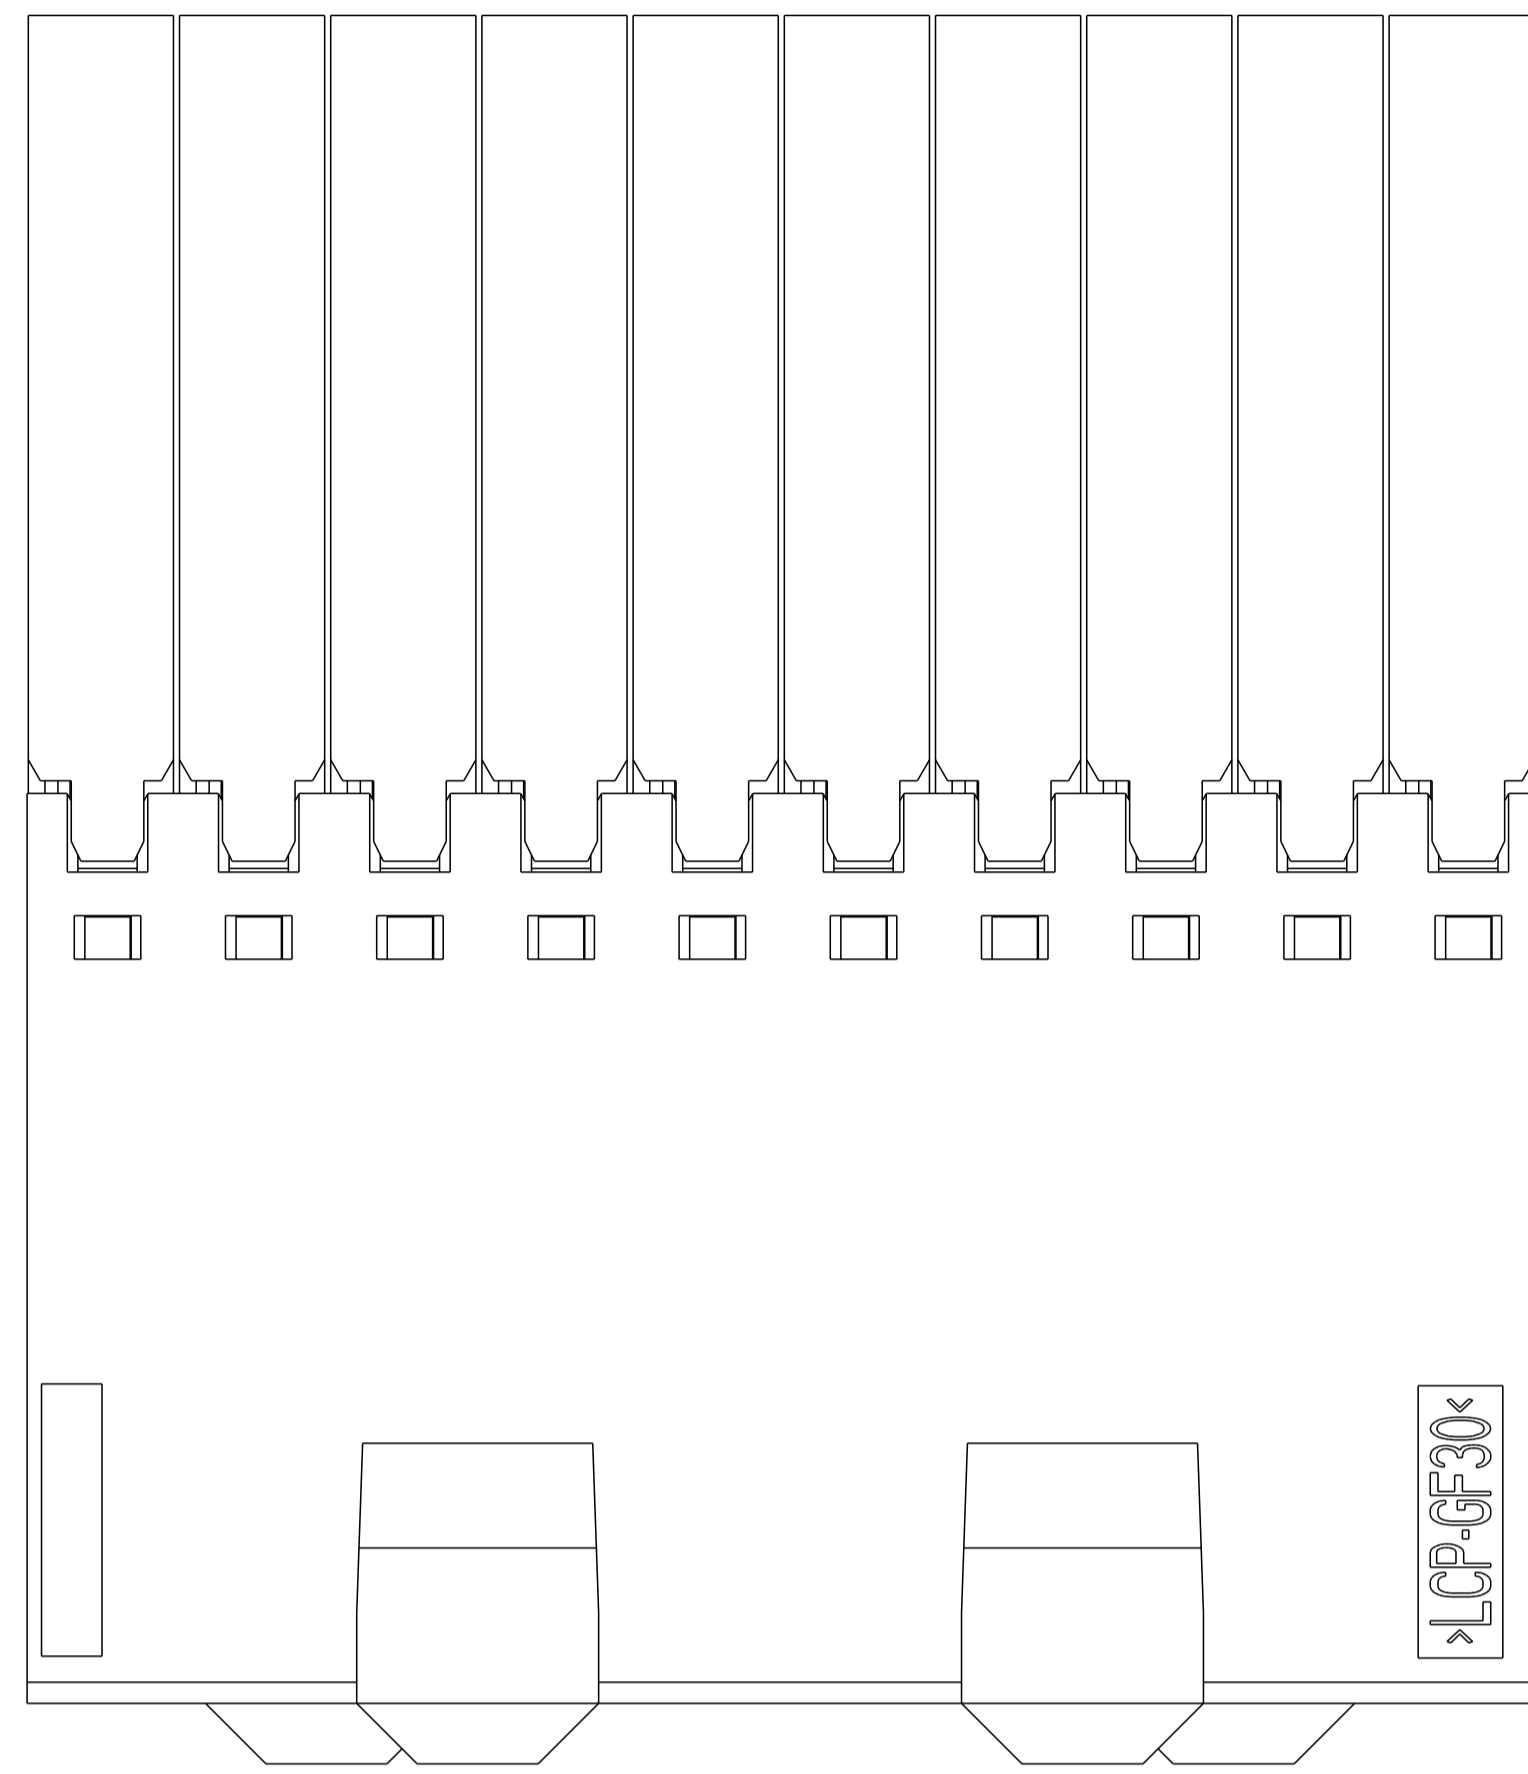
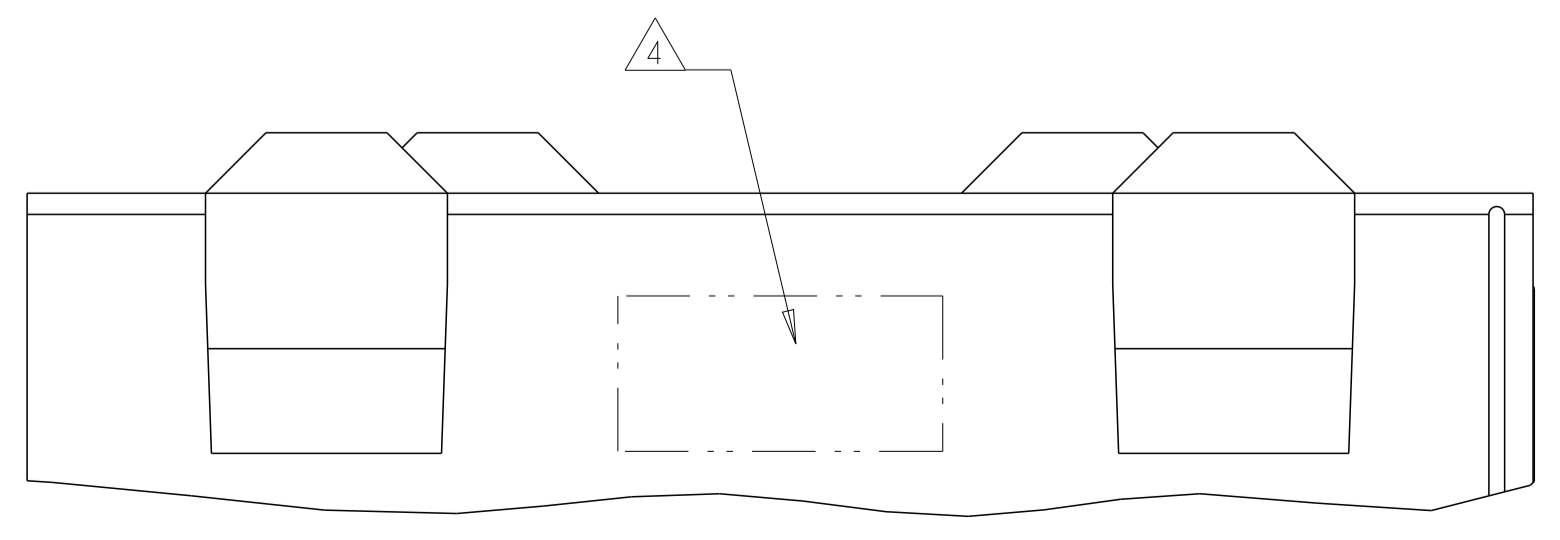


LOC		DIST		REVISIONS			
P	LTN	DATE	DMN	APVD			
C1		13FEB2013	KH	MH			

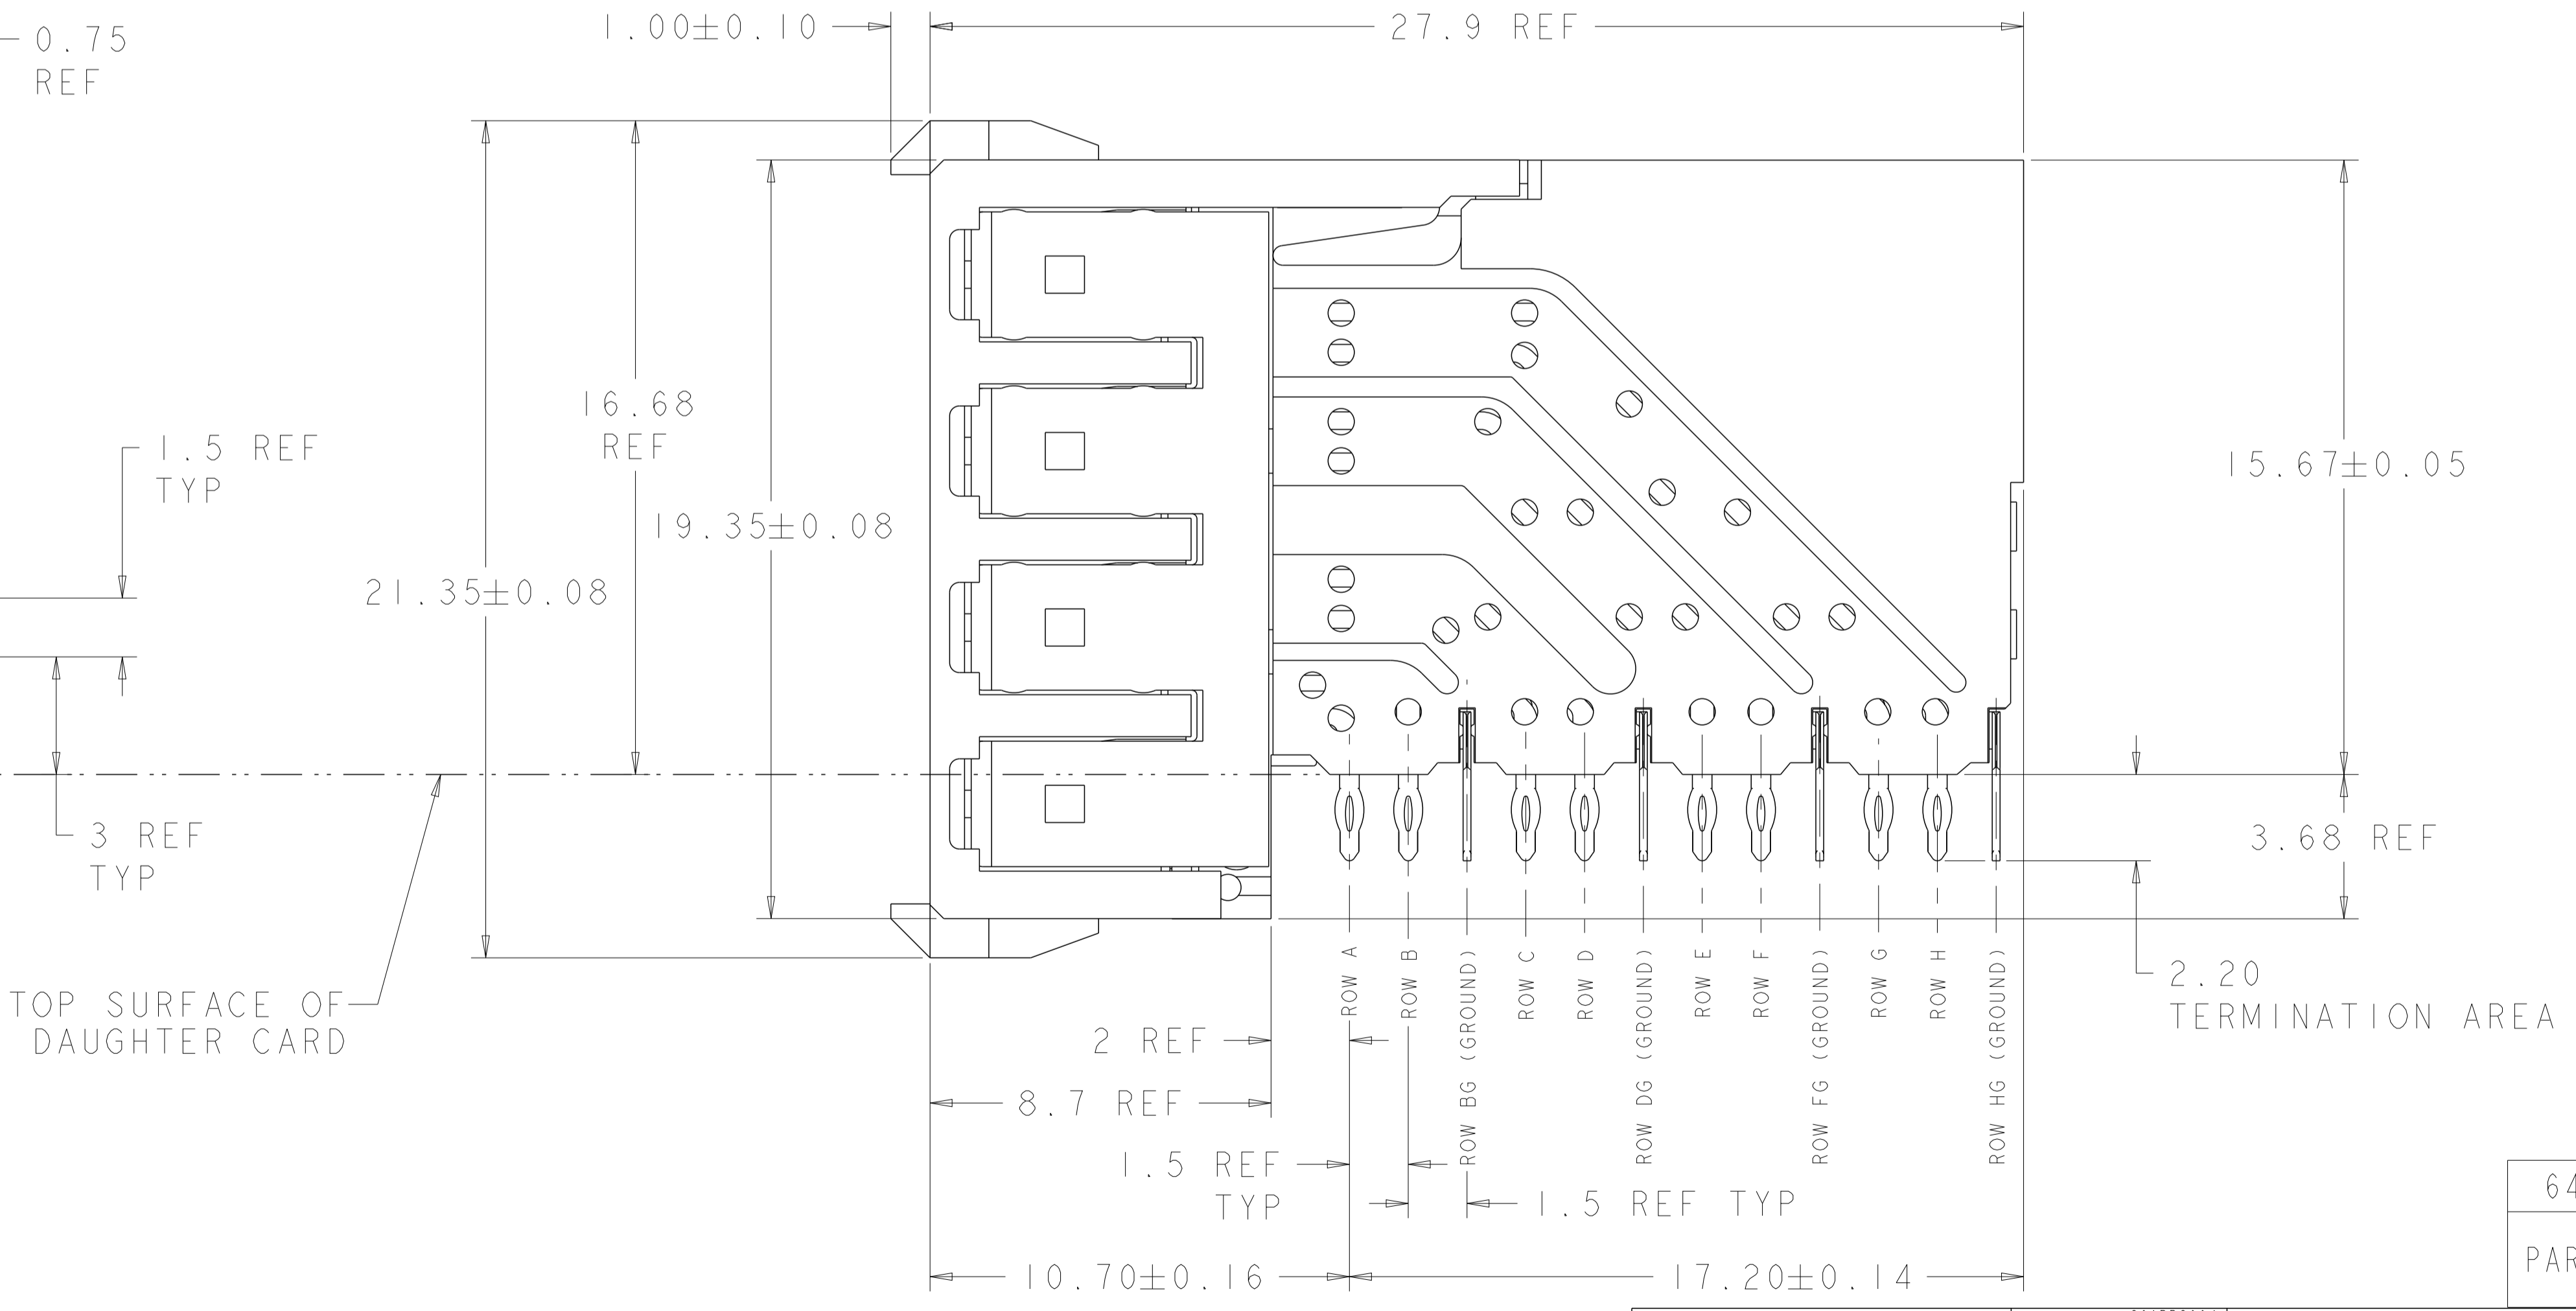

- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
 - △ MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-0 RATED.
 - △ FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING
 - △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
 - △ DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
 - △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

RECOMMENDED PC BOARD LAYOUT, DAUGHTER BOARD, COMPONENT SIDE SHOWN
 SCALE 4:1

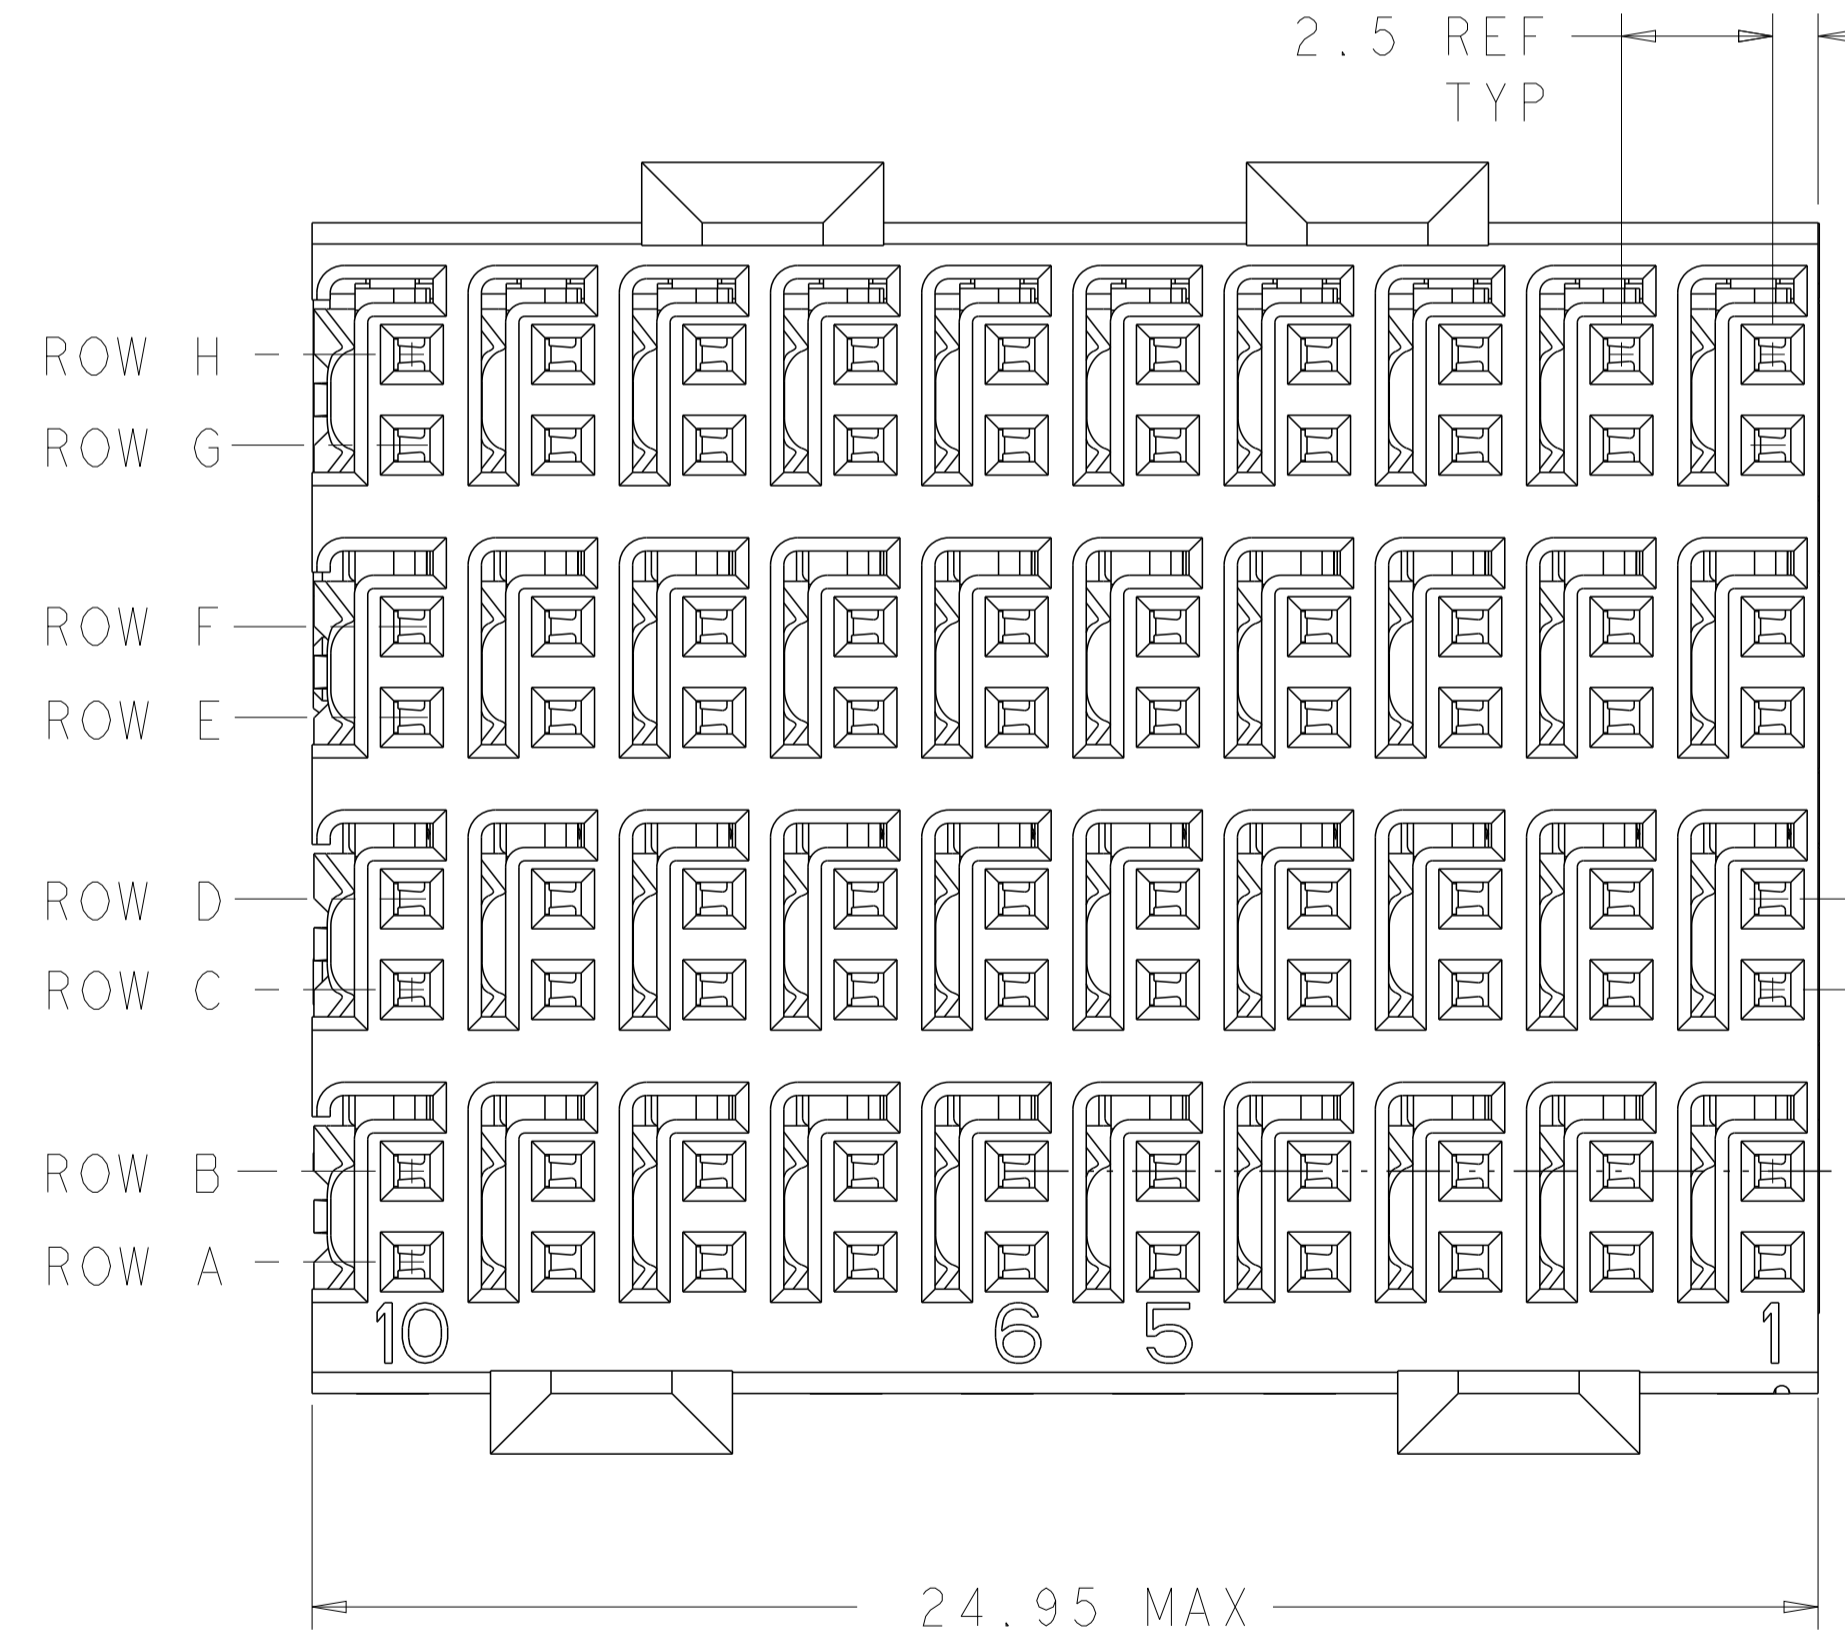

6469001-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN: S. J. MAGARO 26APR2004	NAME: RECEPTACLE ASSEMBLY, 4 PAIR, HMZd
DIMENSIONS:		CHK: R. A. PATTERSON 26APR2004	SIZE: A100779
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: R. A. PATTERSON 26APR2004	SCALE: 8:1
mm	0 PLC ±	PRODUCT SPEC	SHEET 1 OF 1
	1 PLC ±	APPLICATION SPEC	REV: C1
	2 PLC ±	WEIGHT	
	3 PLC ±	CUSTOMER DRAWING	
	4 PLC ±		
	ANGLES ±		
	FINISH		