


TEMP-FLEX

a **molex** company

INSULATION DISPLACEMENT CABLE

.050" PITCH, 26 AWG, 19/34 STRANDED, EXTRUDED FEP

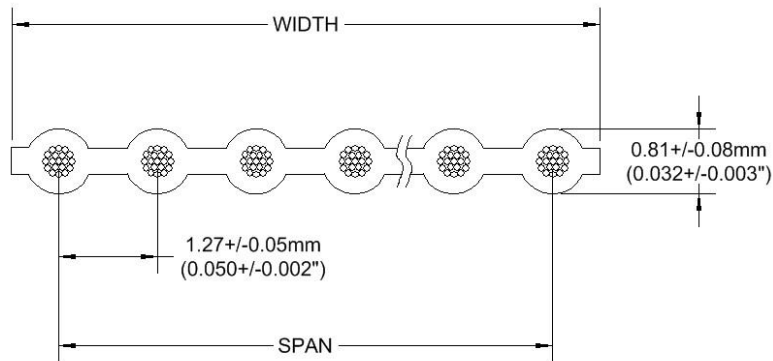

Cond. No.	Part Number	Span	Width
10	1000570483	11.4 ± 0.18mm (0.450 ± .007)	12.7 ± 0.18mm (0.500 ± .007)
15	1000570455	17.8 ± 0.18mm (0.700 ± .007)	19.0 ± 0.18mm (0.750 ± .007)
16	1000570126	19.0 ± 0.18mm (0.750 ± .007)	20.3 ± 0.18mm (0.800 ± .007)
20	1000570127	24.1 ± 0.18mm (0.950 ± .010)	25.4 ± 0.25mm (1.000 ± .010)
34	1000570132	41.9 ± 0.18mm (1.650 ± .010)	43.2 ± 0.25mm (1.700 ± .010)
40	1000570133	49.5 ± 0.18mm (1.950 ± .010)	50.8 ± 0.25mm (2.000 ± .010)

CHARACTERISTICS

Conductor	26 AWG, 19/34 Stranded, Silver Plated Copper	
Insulation	FEP	
Color	Blue	
Impedance (ohms)	100 Unbalanced	155 Balanced
Capacitance (pF/ft)	10.0 Unbalanced	5.9 Balanced
Inductance (uH/ft)	0.14 Unbalanced	0.16 Balanced
Insulation Resistance (Mohm)	>500	
Voltage Rating	300V	
Temperature Rating	200C	

PACKAGING

100 ft./Spool, 10 Ft. minimum length

MINIMUM ORDER QUANTITY:

500 FT.

UL Style 20424