



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
3	RE-F-06374	J.M	M	99.05.15					
3	RE-F-06522	J.M	M	99.9.7					

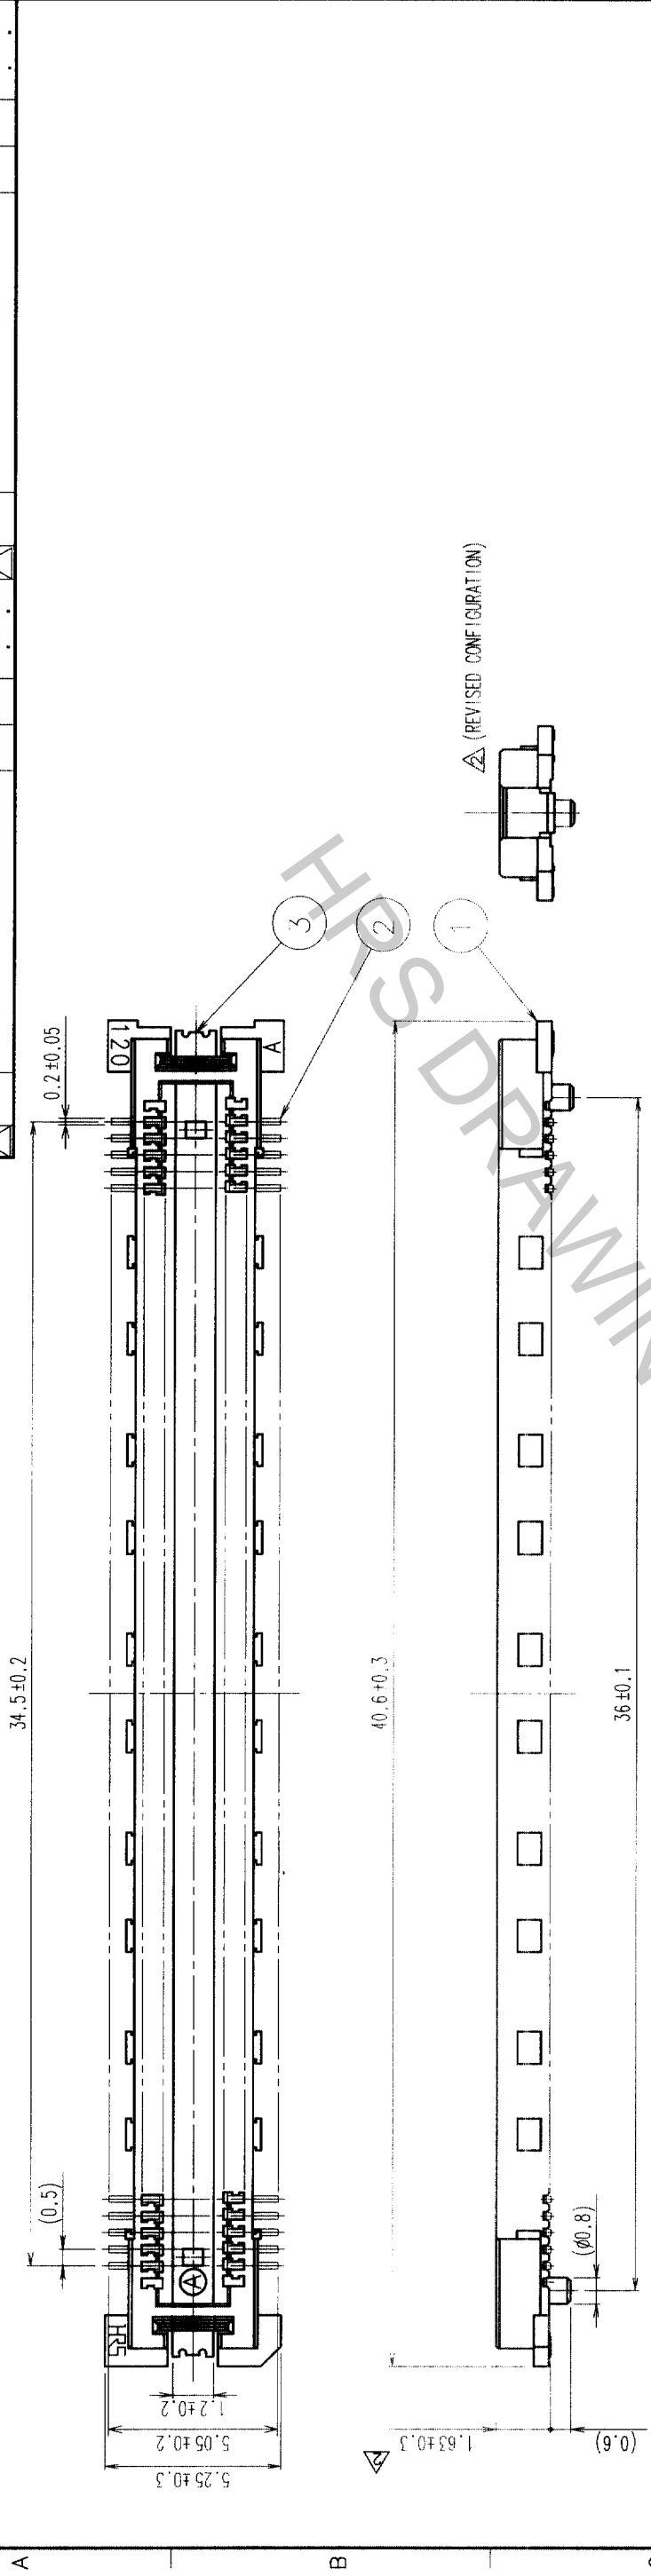

RECOMMENDED LAND PATTERN DIMENSION OF PCB

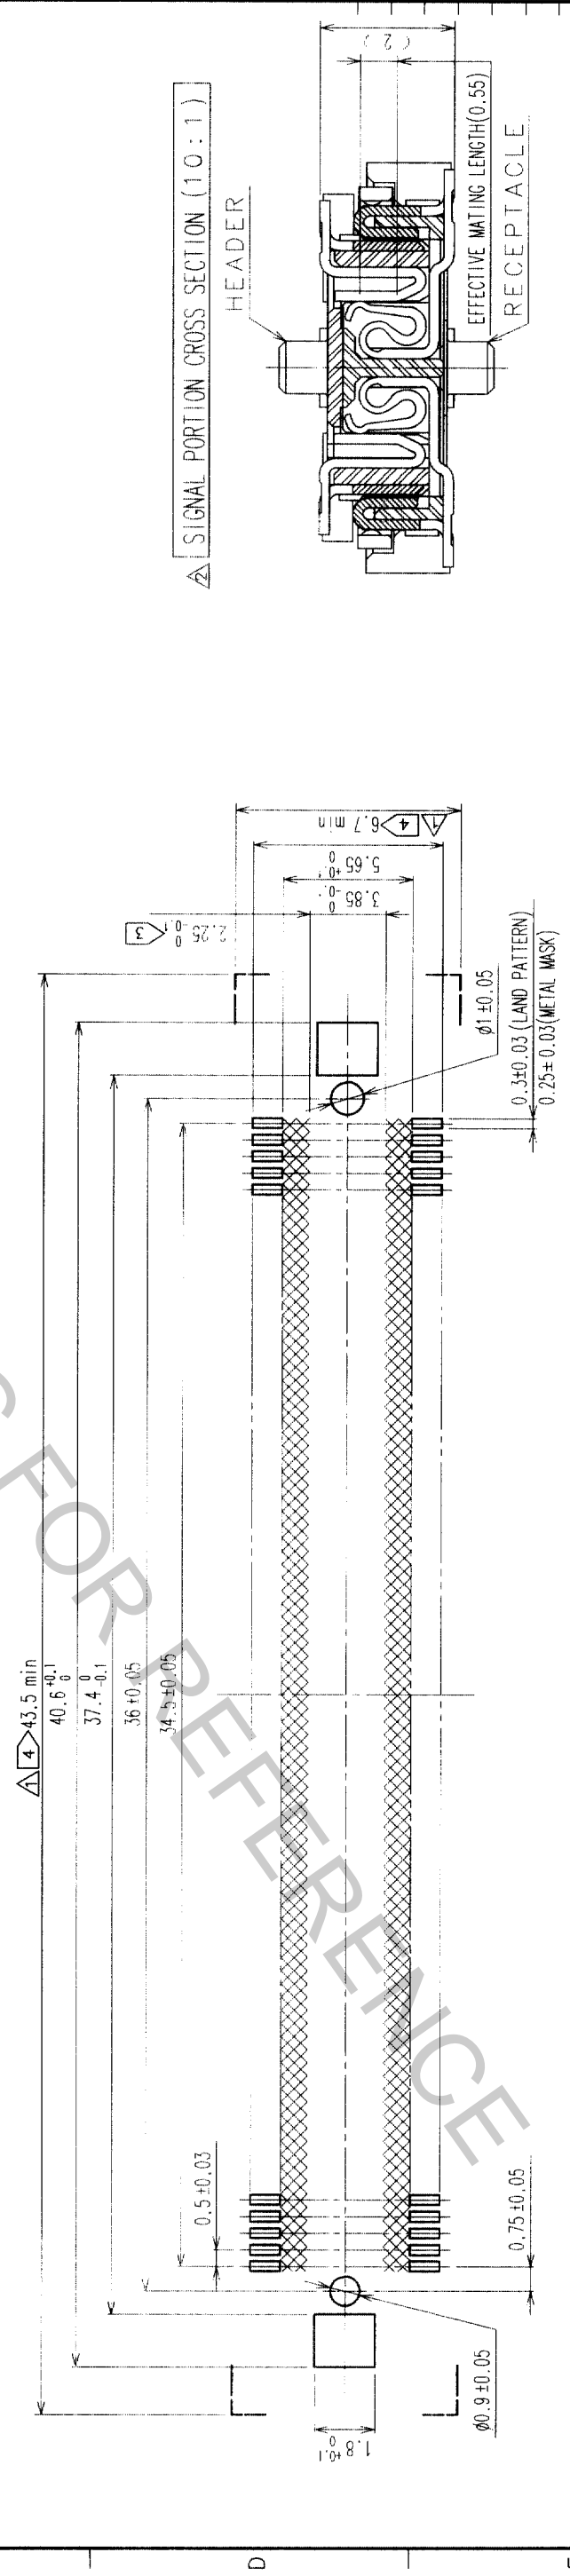

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1mm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL
1	LCP	BEIGE UL94V-0
NO.	MATERIAL	FINISH, REMARKS
		3 PHOSPHOR BRONZE TIN PLATED
CODE NO. (OLD)	CL	
		DRAWN
		DESIGNED
		CHECKED
		APPROVED
		RELEASED
		J. Matsukawa
		Y. Yoshimura
		Y. Yoshimura
		990212
		990212
		990212
		990212

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.

DRAWING NO. EDC3-152103

SCALE 5:1

UNITS mm

PART NO. FX11LA-140P-SV

CODE NO. CL573-0045-0

HIROSE ELECTRIC CO., LTD.

USA