


## CUSTOMER DRAWING

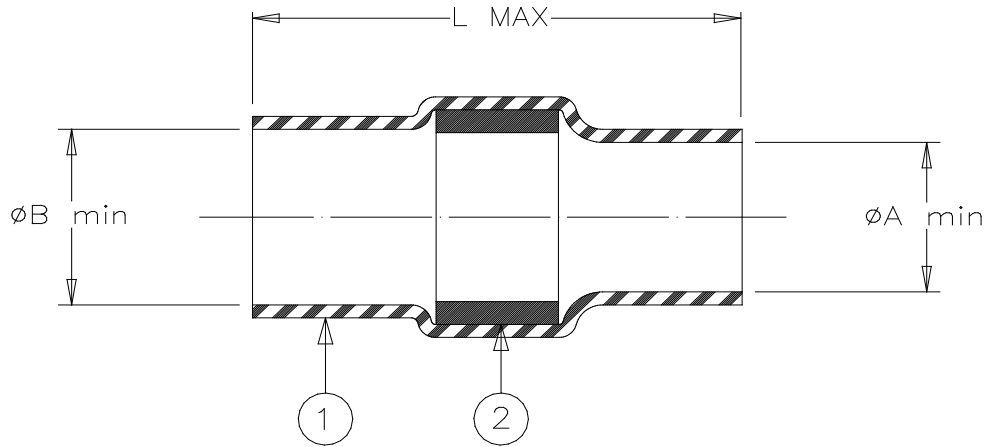

Product Revision		Product Dimensions			Cable Dimensions	
Part Name		A min	B min	L max	D max	E min
B-055-03	I	43	46	103	42	28


### MATERIAL


- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyolefin. Transparent clear.
- SOLDER PREFORM WITH FLUX:  
 SOLDER: TYPE Cd18 per ANSI J-STD-006.  
 FLUX: TYPE ROM1 per ANSI J-STD-004.

### APPLICATION

- This controlled soldering device is designed for termination of a tin plated or bare copper shield on a cable having an insulation rated for at least +85°C.
- Temperature range: -55°C to +125°C.

For best results, prepare the cable as shown:

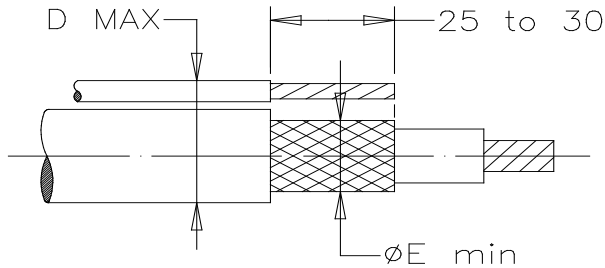

		Raychem Devices	TITLE: <b>SHIELD TERMINATION LOW TEMPERATURE</b>				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.			DOCUMENT NO.: <b>B-055-03</b>				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: <b>ECO-16-009232</b>		REPLACES: <b>B05503</b>		
DRAWN BY: <b>R. MAPALO</b>	DATE: <b>15-Oct-98</b>	REV.: <b>SEE TABLE</b>	DOC ISSUE: <b>C1</b>	SCALE: <b>NONE</b>	SIZE: <b>A</b>	SHEET: <b>1 of 1</b>	