



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	86	N		REV PER ECO-11-008916	13MAY11	PY	BW

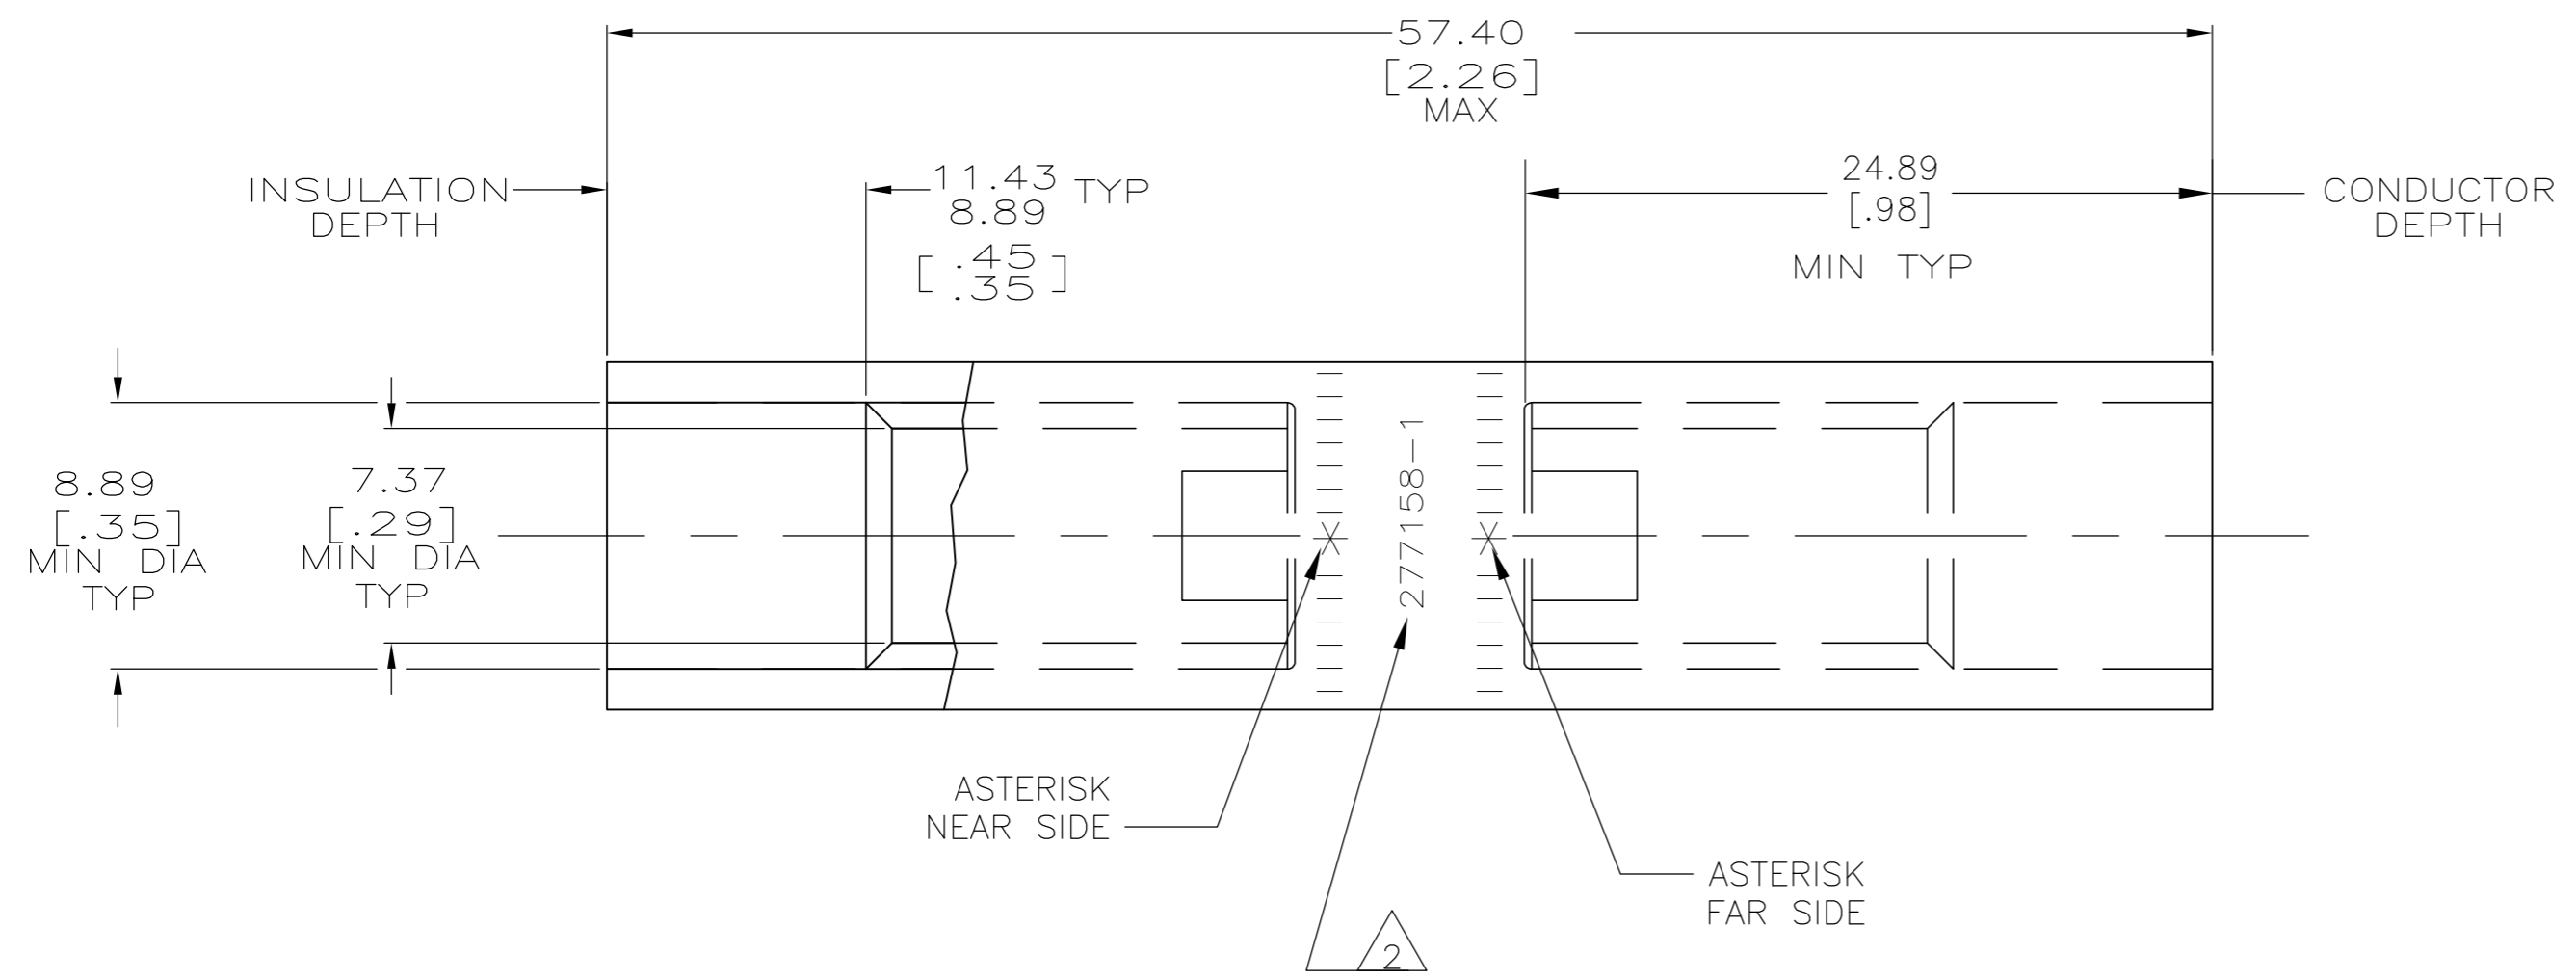

1 WIRE INSULATION: 7.01[.276] - 7.75[.305] DIA  
 2 STAMP " 277158-1 AMP 4AL-6CU"  
 LOCATED APPROX AS SHOWN

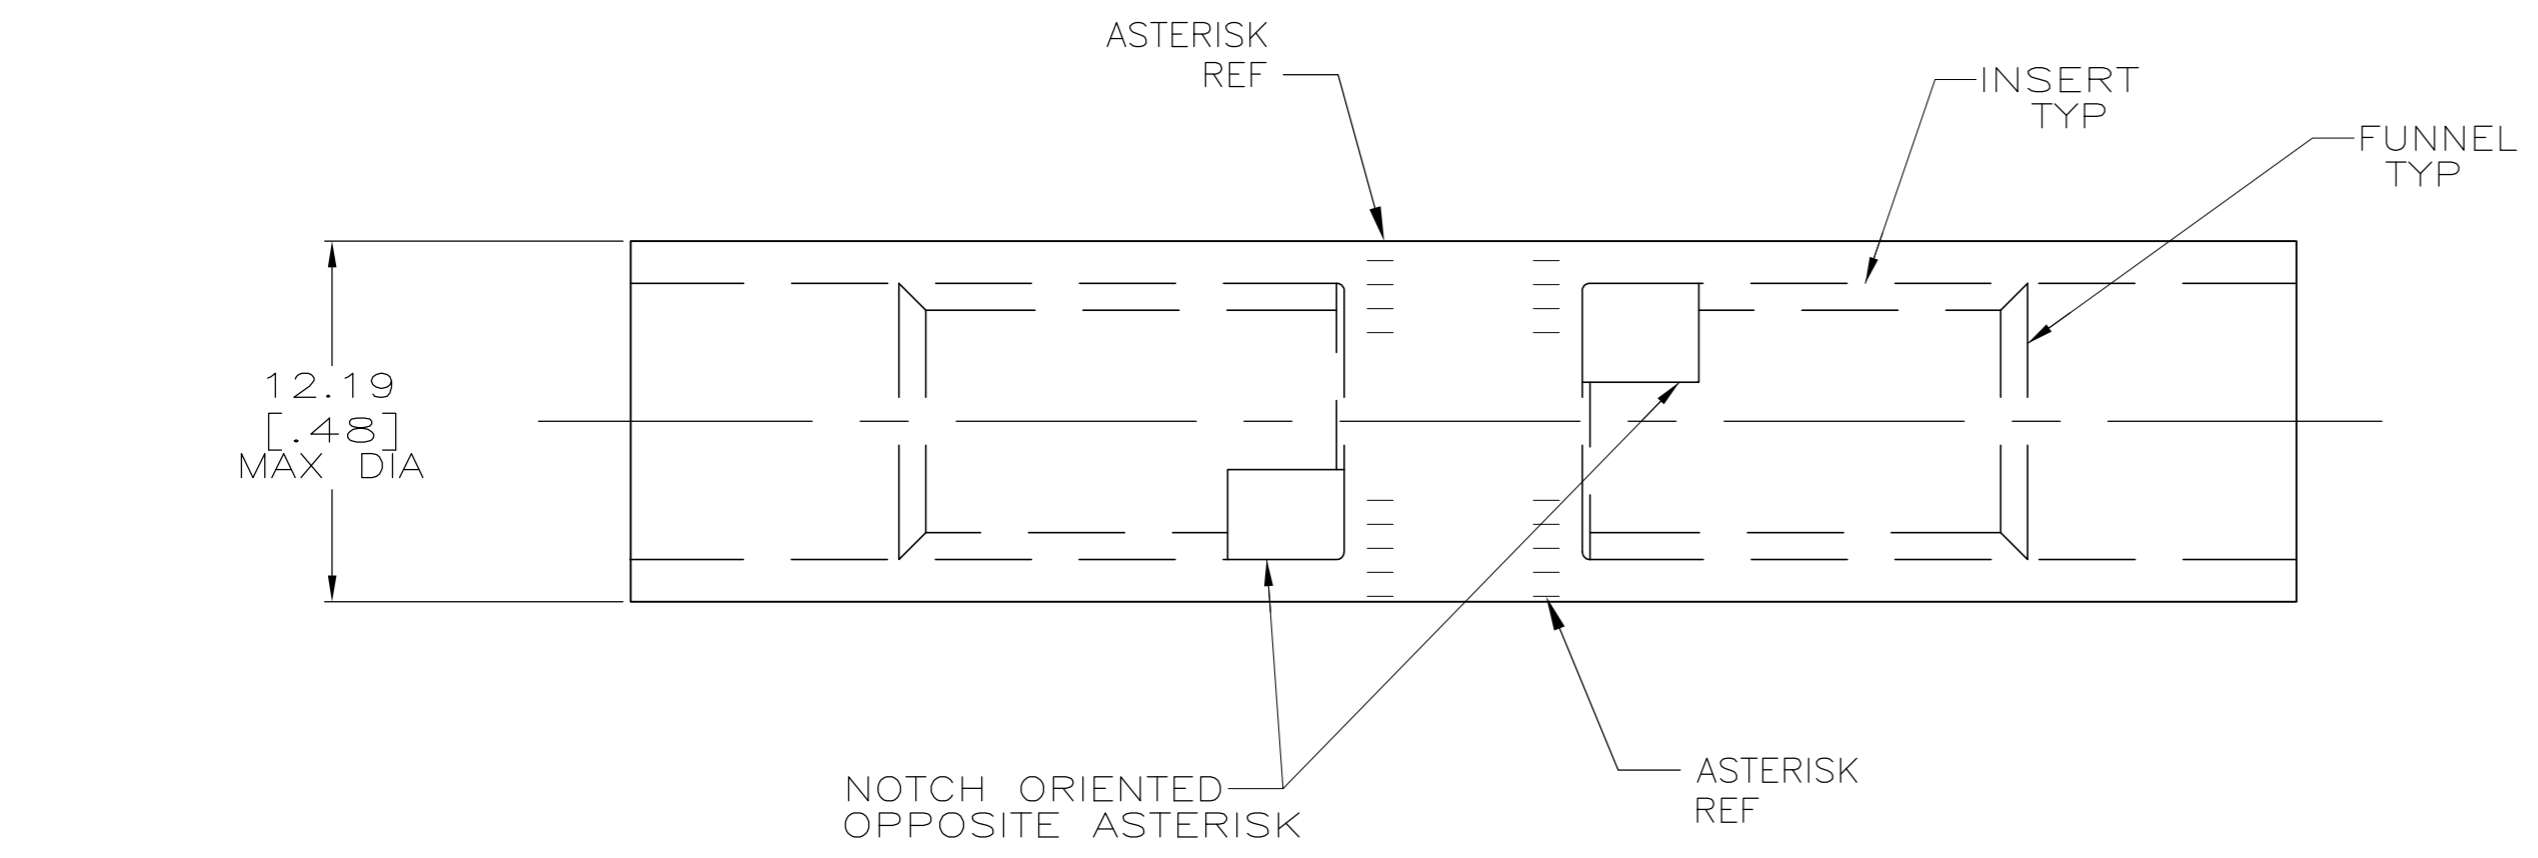

<u>SPLICE:</u> COPPER ASTM B-187 TIN PL ASTM B545, 0.00381[.000150] MIN THK	277158-1
<u>INSERT &amp; FUNNEL:</u> BRASS ASTM B36 NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	
MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 7/5/89	<b>STE</b> TE Connectivity	
DIMENSIONS: mm [ INCHES ]		CHK MS FEHER 5/1/90		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	NAME	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC 108-11011	WIRE SPLICE, BUTT, COPALUM, SEALED	
2 PLC ± -	3 PLC ± -	APPLICATION SPEC 114-2134	WIRE SIZE: 21.9mm <sup>2</sup> [4] ALUMINUM	
4 PLC ± -	ANGLES ± -	WEIGHT 26.8 GRAMS	SIZE A2	CAGE CODE 00779
MATERIAL SEE TABLE	FINISH SEE TABLE	CUSTOMER DRAWING	DRAWING NO C-277158	RESTRICTED TO -
SCALE 4:1			SHEET 1 of 1	REV N

277158