

INTERCONNECTS

SERIES 804 & 805 • 2,54 GRID (0,76 DIA. PINS), HEADERS AND SOCKETS • TRIPLE ROW

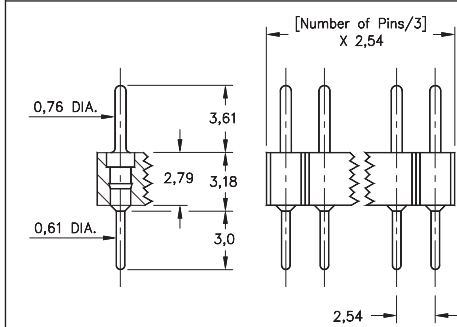
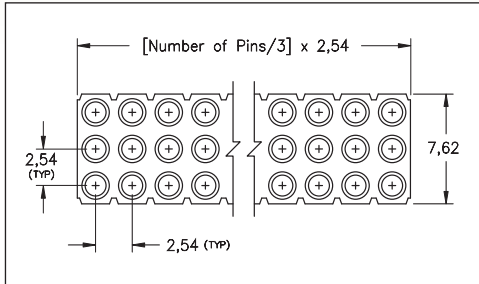


FIG. 1



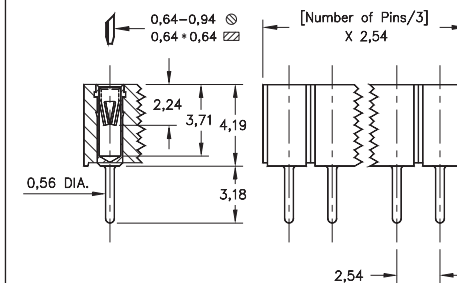


FIG. 2

- Series 804 triple row 2,54 grid headers uses MM #5016 pins. See page 215 for details
- Series 805 triple row 2,54 grid sockets uses MM #1303 pins. See page 180 for details
- Series 805 triple row 2,54 grid sockets uses Hi-Rel, 6-finger BeCu #47 contact rated at 4.5 amps. See page 256 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

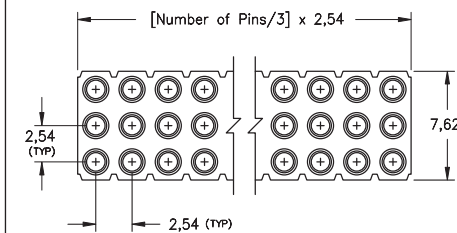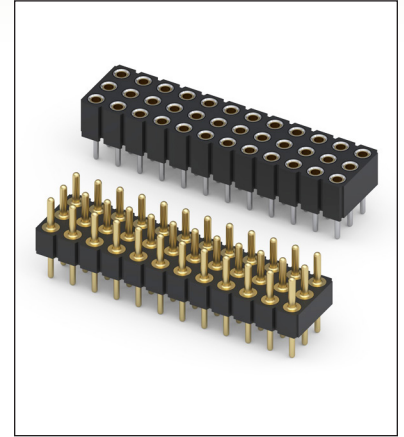

ORDERING INFORMATION

FIG. 1	Series 804...002		Straight Pin Header	
		804-10-0		-10-002000
	Specify number of pins			09-96
			XX=Plating Code See Below	
			For Electrical, Mechanical & Environmental Data, See page 264	
	SPECIFY PLATING CODE XX=	10		
	Pin Plating	0,25µm Au		
FIG. 2	Series 805...012		Straight Pin Socket	
		805-43-0		-10-012000
	Specify number of pins			09-96
			XX=Plating Code See Below	
			For Electrical, Mechanical & Environmental Data, See page 264	
	SPECIFY PLATING CODE XX=			43
	Sleeve (Pin)			5,08µm Sn
	Contact (Clip)			0,76µm Au