

RED INDICATES ORIGINAL

DASH NO	CABLES ACCOMMODATED	A DIM	B FLATS	C HEX	ASSEMBLE PER
-1	RG-58				
-U1	ESSEX 621-715				
-2	RG-59				
-U2					
-2A	BELDEN 8279				
-U2A					
-2B	W. E. CO. 730A				
-U2B					
-3					
-U3	RG-223	.906	.437	.437	TAI-101
-3A					
-U3A	RG-55				
-4	RG-122				
-U4	BELDEN 8218				
-5	RG-174				
-U5	RG-187				
-5A					
-U5A	RG-196				
-5B	HEWLETT-PACKARD 8120-1107				
-U5B					
-6	BELDEN 9231	.963	.500	.500	TAI-119
-U6					
-6E	RG-5				
-U6E	RG-6				
-21					
-U21	RG-303				
-22					
-U22	RG-180				
-34					
-U34	BELDEN 8228	.906	.437	.437	TAI-101
-36	275-3991 MICRODOT				
-U36	616-569 AMPEX				
-37	810 RAYCHEM				
-U37					
-41	RG-304				
-U41	BELDEN 9248/9284/9383				
-44	BRAND-REX B749				
-U44	GORE CO6C032				
-51	88281 BELDEN	.963	.500	.500	TAI-119
-U51					
-52	89120 BELDEN				
-U52					
-53	89555 BELDEN	.906	.437	.437	TAI-101
-U53					
-63					
-U63	734A.AT&T				

FIG 1  
- 1 SHOWN


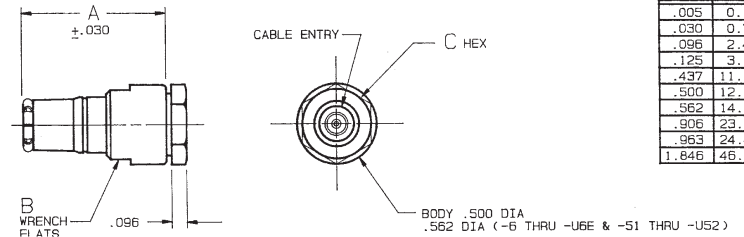


FIG 2  
- 1 SHOWN

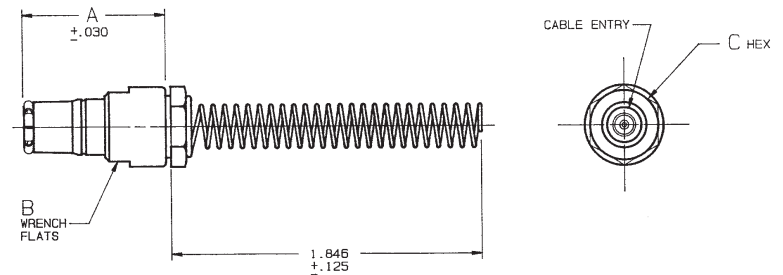

△ IF BEND RELIEF SPRING REQUIRED, ADD SUFFIX "BR" TO MODEL NO. (SEE FIG 2) (NOT AVAILABLE WITH CABLE GROUPS -6, -U6, -6E, -U6E, -51, -U51, -52, -U52, -63 & -U63)

4. MALE COAXIAL PUSH-ON PLUG BOTH 50 & 75 OHM VERSION (BNC STYLE)
3. DASH NO DENOTES CABLE GROUP EXCEPT "U" PREFIX DENOTES 75 OHM VERSION
2. FINISH: TFS-1A (NICKEL)
1. ALL DIM ARE IN INCHES

DISK #	DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.		REVISIONS		1-0390	SH 1
REV	EO	DESCRIPTION	DWN	APPROVED	DATE	
C 5	6	8594	ADDED -63 CABLE GROUP-DWG NO WAS 1000-0390 & REDRAWN	DJK	DJK	11/3/89

QTY	DESCRIPTION		PART NUMBER	ITEM
TOL UNLESS SPECIFIED .XX ± .XXX ± .005 .XXXX ±	TROMPETER RF connectivity		PL123/UPL123	
DWN	DJK	9/15/89	MATERIAL	CODE IDENT
CHK	TLE	10/21/81	14949	DRAWING NO.
ENGR	ENR	10/31/89	1-0390	REV
NEXT ASSY	APPR	1/3/89	SCALE 2/1	DATE 7/6/76
				SHEET 1 OF 2