


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
E		REV PER EC 0H14-0215-05	16JAN06	BL	CCT		

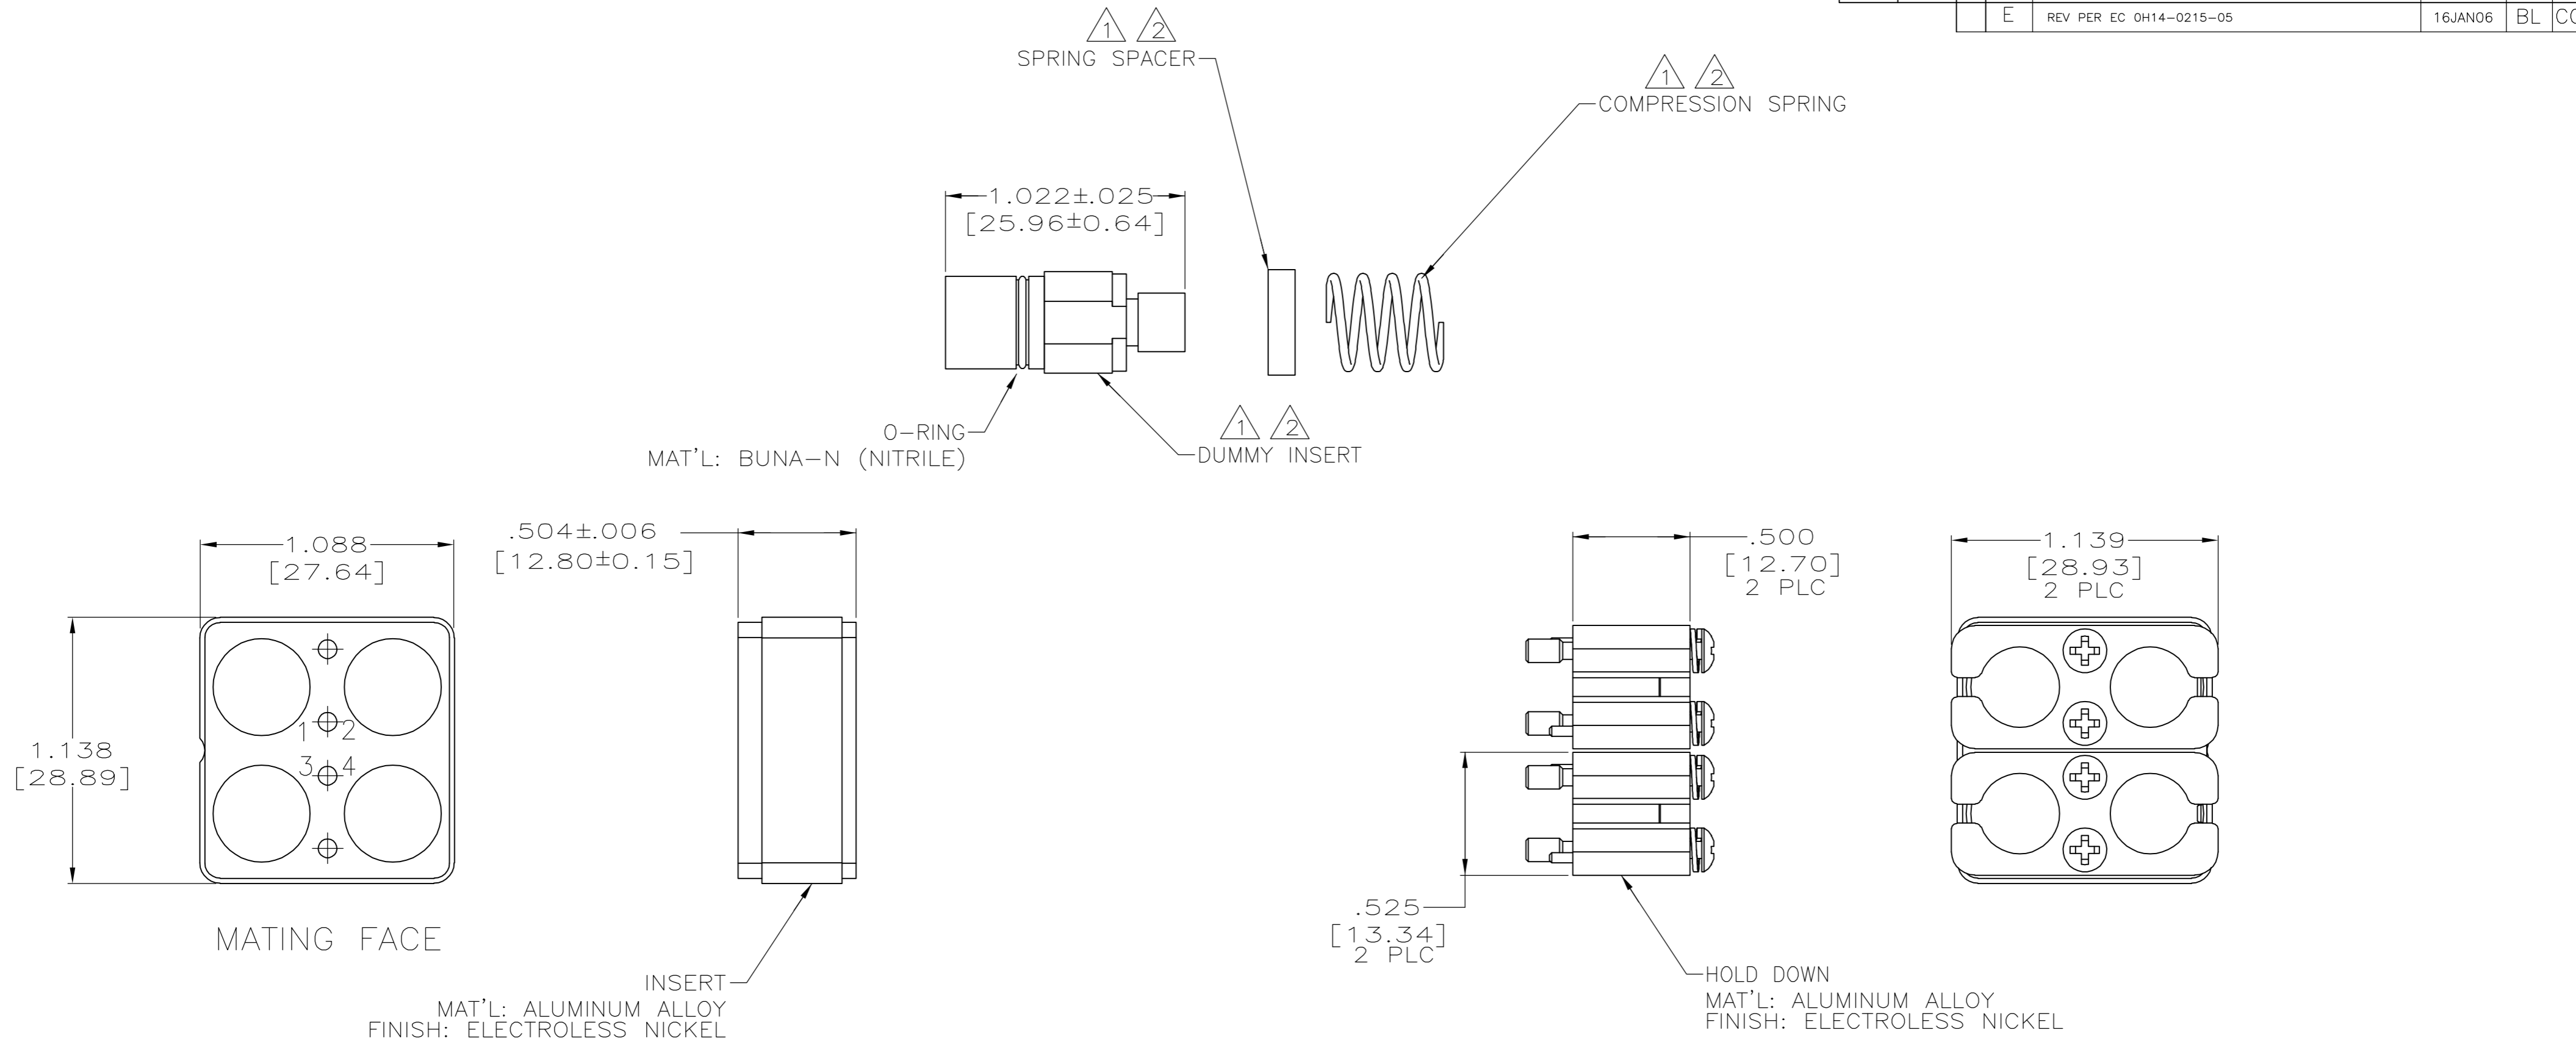

- 1 FOR 1484662-1: ONE DUMMY INSERT, SPRING SPACE, O-RING AND COMPRESSION SPRING SUPPLIED TO PLUG UNUSED CAVITY. INSTALLATION AND LOCATION DETERMINED BY CUSTOMER.
- 2 FOR 1484662-2: FOUR DUMMY INSERTS, SPRING SPACERS, O-RING AND COMPRESSION SPRINGS SUPPLIED TO PLUG UNUSED CAVITIES. INSTALLATION TO BE DONE BY CUSTOMER.
- 3. CUSTOMER TO LUBRICATE O-RING WITH LUBRICANT COMPATIBLE WITH NITRILE RUBBER (RECOMMENDED DOW CORNING 55 O-RING LUBRICANT).
- 4 ELECTROLESS NICKEL PLATING OF INSERT, HOLD DOWN PLATE AND SPRING SPACER DOES NOT CONTAIN INTENTIONAL ADDITIONS OF LEAD AND CADMIUM PER DFE STANDARD 230-700.

2/4	5-1484662-2
2	1484662-2
1	1484662-1
REMARKS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C.C.THOMAS	2-5-02	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK	S.GLATFELTER	2-5-02		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	S.GLATFELTER	2-5-02		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 [0.13] 4 PLC ± - ANGLES ± - FINISH -		PRODUCT SPEC	-			
MATERIAL		APPLICATION SPEC	-		NAME	INSERT KIT,RCPT,4 POSN., MINI EB,ARINC 600
		WEIGHT	-		SIZE	A2
		CUSTOMER DRAWING	SCALE	2:1	CAGE CODE	00779
			SHEET	1 of 1	DRAWING NO	C=1484662
			REV	E	RESTRICTED TO	-