

Revision level		Revision Record	Changed	Date	Approved	Date
part	drawing					
—	01	See ECN 011616	A.A.C.	08/27/10	K.A.C.	08/31/10

HOUSING:
POLYCARBONATE

Material

Dimension tolerances
unless otherwise specified

.XXXX = ± .0130

.XXX = ± .300

.XX = ± .30

.X = ± .2

∠ = ± 0.5 °

Dimension Units mm

Stripping Length:

11mm(.45 in)

Wire Range:

0.5–2.5 mm²

Solid/Stranded(VDE)

(12–22 AWG

Solid/Stranded) MAX 7

Cores

Working Temp:

–30°C(–22°F)to

110°C(230°F) (VDE)

–22°F(–30°C) to

221°F(105°C) (cULus)

Voltage:

600V(cULus)

Current:


24A

Certifications:


UL E316080, KEMA–KEUR

VDE,FIMKO,ENEC,CEBEC,

NEMKO, DEMKO

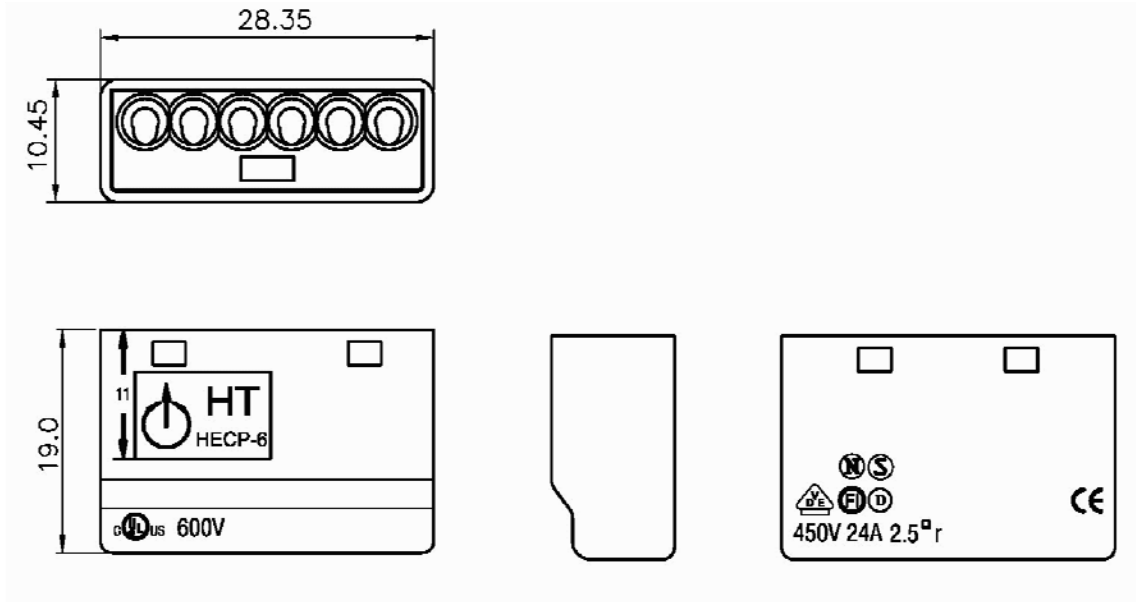

ACAD MECH
2009



Drawn

A.A.C.

08/27/10

Scale:

NTS

Computer File Number
WC\CST\XWC-HPR016CSU_01

Approved

K.A..C.

08/31/10

Title

HECP-6

Phase: Production

HELACON PLUS

PUSH-IN WIRE CONNECTOR

ALL PROPRIETARY RIGHTS IN THE
SUBJECT MATTER SHOWN ON THIS
DRAWING ARE EXCLUSIVE
PROPERTY OF HELLERMANNTYTON

HellermannTyton

7930 N. Faulkner Rd.
Milwaukee, WI 53224
Ph: (414) 355–1130
Fx: (414) 362–8342

Drawing–No

XWC-HPR016CSU

Format

AH

Sheet 1 of 1

PERFORMANCE
SPECIFICATION