


- NOTES:**
- MATERIALS:**
 HOOD: PBT GF UL94 V-0 BLACK
 FRONTSEALING: SILICONE VMQ BLUE
 SCREW: STAINLESS STEEL
 O-RING: NBR BLACK
 - TEMPERATURE RANGE: -30°C TO +90°C
 - RECOMMENDED TORQUE FOR SCREW:
 35Ncm (3.1 in.LB)
 MAX. TORQUE: 68Ncm (6 in.LB)
 - SINGLE PACKED

* COMPLETELY TIGHTENED

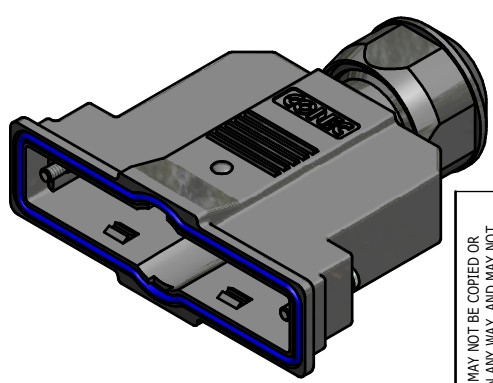

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm		scale:		1,5:1 (1:1)	
	±0,3 unless otherw. specified				material:		SEE NOTES	
	drawn	07.02.2014	Heinrich		title:			
	appd.	07.02.2014	Huether		WATER RESISTANT D-SUB HOOD			
	norm				37 POS.			
	d-old				SHORT SCREW 4-40UNC STAINLESS STEEL			
	a	Origin			dwg no:		15K1A1438	
	rev.	description	date	name	part no:		15-004740	
							DIN-A3	
							sh: 1	

