



REV.	DATE	DESCRIPTION
A	08/08/02	UPDATE BARREL DIAMETER

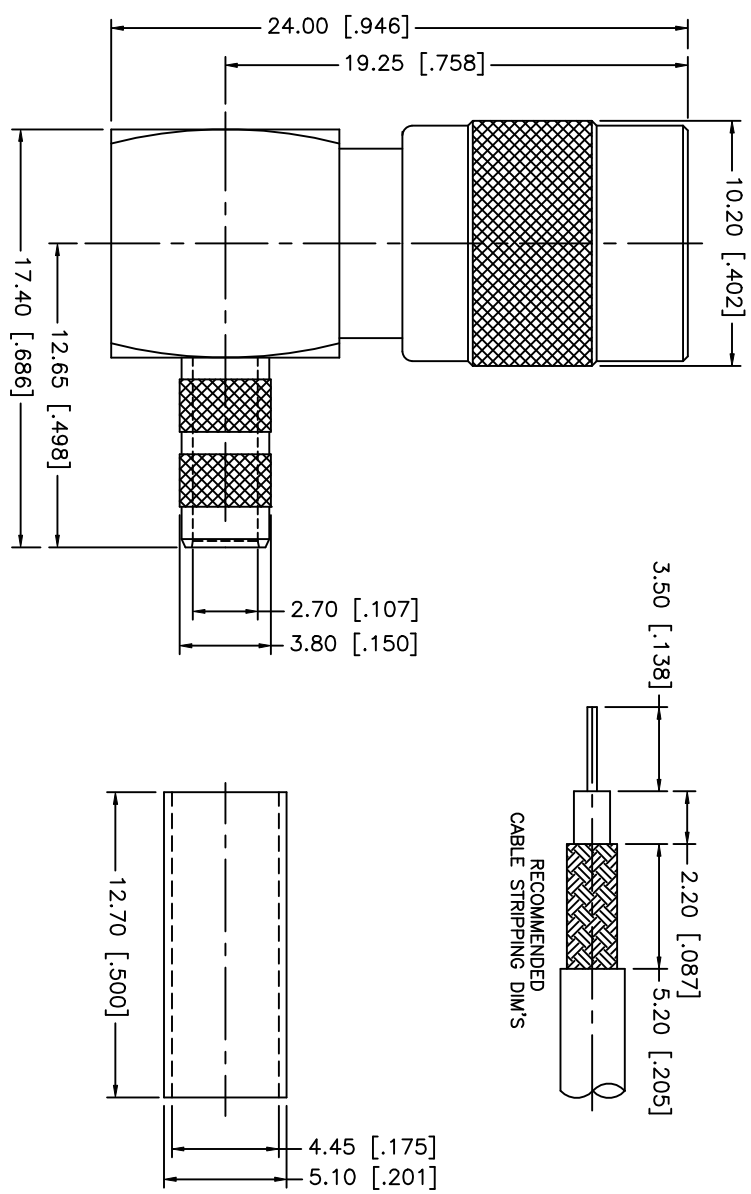

CRIMP NOTES:
 1) CRIMP FERRULE
 HEX CRIMP SIZE .178"
 2) CONTACT PIN TO SOLDER

DESCRIPTION	MATERIAL	FINISH	DO NOT SCALE DRAWING	APPROVALS	DATE	TITLE	SCALE	PART NO.	DWG. NO.	REV.
8			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	DRAWN G.R.S.	08/08/02	SMB R/A POSITION LOCK CRIMP PLUG (FOR RG-180B/U, 195/U CABLE)	A	99001	142292	A
7		DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	CHECKED							
6		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"	ISSUED							
5	FERRULE	BRASS	NICKEL							
4	RETAINER RING	BER. COPPER	NATURAL							
3	CONTACT PIN	BER. COPPER	GOLD							
2	INSULATOR	TEFLON	NATURAL							
1	BODY/SHELL	BRASS	NICKEL							

Amphenol - Connex
 CONNECTOR CORPORATION