

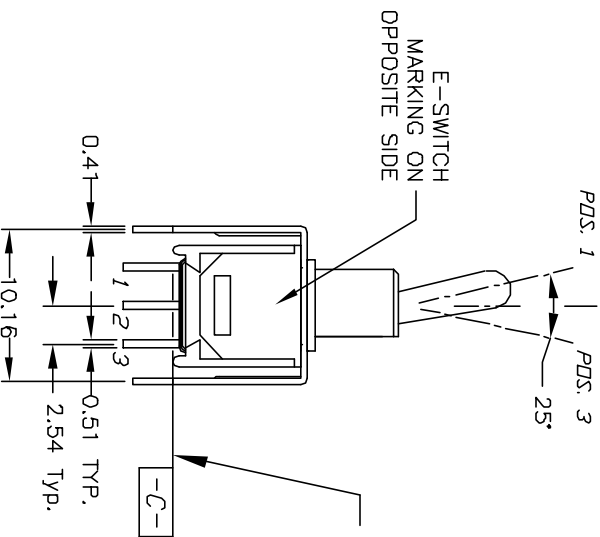


RECOMMENDED P.C.B. LAYOUT

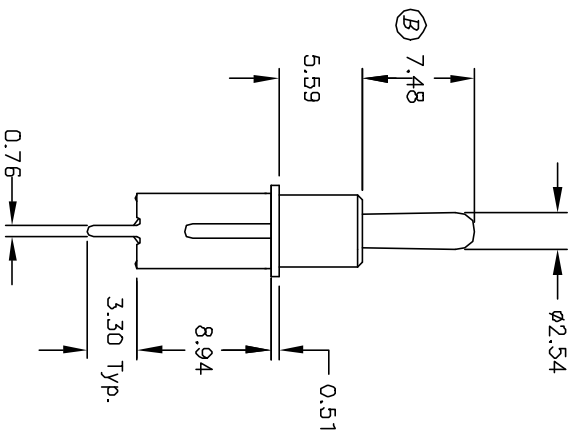

NO EPOXY ON TERMINALS BELOW THIS SURFACE



CIRCUIT: SPDT CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NONE	(DN)
2-3	DPEN	2-1

( ) =Momentary

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4 (VA) max. @20 VAC or DC max.
5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/ Gold plate over Ni plate.
6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C

REV. B		11538		REVISED PART DESCRIPTION		6/11/01		CJB		TITLE	
ECN NO.		11538		DESCRIPTION		DATE		CHKD		200 MSP-2 TS B2 VS2 R E	
<b>E-SWITCH®</b>											
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED											
SCALE		2:1		DATE		6/11/01		DR		CJB	
DWG		T213010		REV		B					