
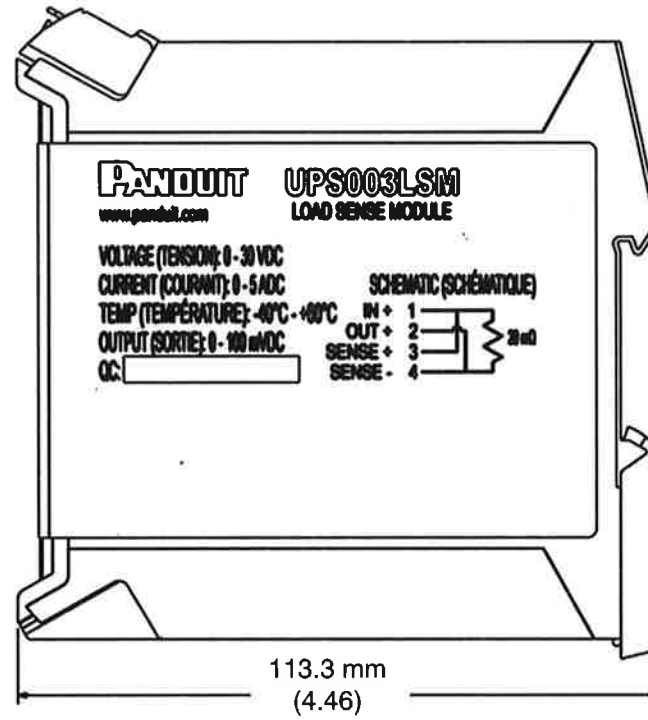
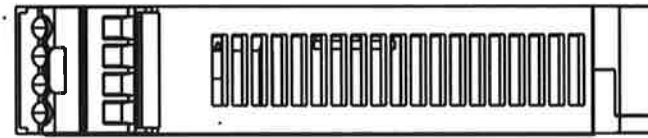
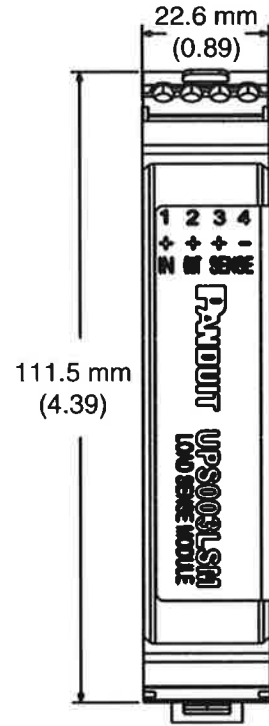


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

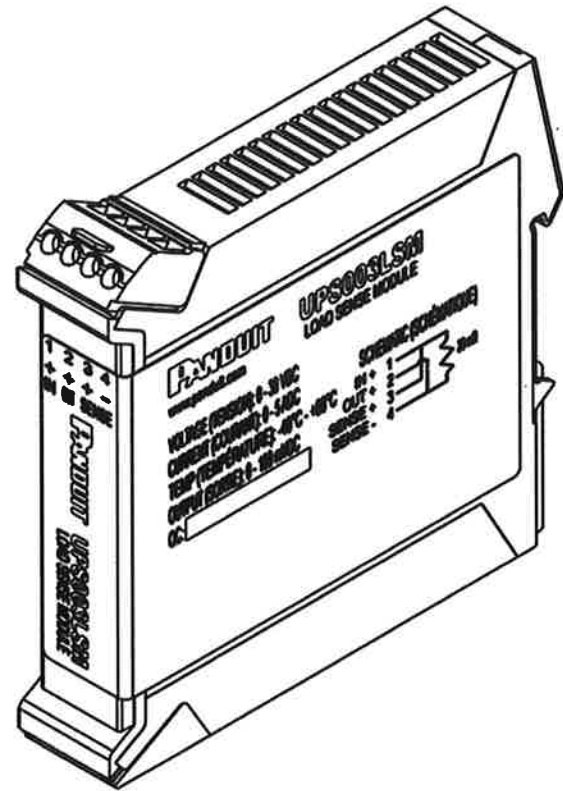

NOTES, UNLESS OTHERWISE SPECIFIED:

PANDUIT PART NO.: UPS003LSM
(LOAD SENSE MODULE)

Input Power

Voltage: 30.0 VDC Max.
Current: 5 A max.

Output Power

Voltage: 30.0 VDC Max.
Sense: 100 mV max.
Current: 5 A max.

Environmental

Operating Temperature: -40°C to +60°C.
Storage (non-operational) Temperature: -40°C to +70°C.
Humidity: 0 to 95% RH, noncondensing
Operational Vibration: 2G at 10 to 500 Hz
Operational Shock: 20G (11ms 3 bumps / direction, 18 bumps in total)

Weight: 105.72 gr. / 0.233 lbs.

Numbers in parentheses () are inches.

F:\wrkgrp\rvusers\ENGR DOCS\LABEL DRAWINGS\FG27233C01_01
UPS003LSM CUST DWG..doc

						UPS003LSM (LOAD SENSE MODULE)	
						CUSTOMER DRAWING	
						ITEM REVISION NAME: FG27233C01_01	
						PANDUIT	
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:	
						MATERIAL: SEE NOTES	
						DRAWING NUMBER: FG27233C01	
						THIRD ANGLE PROJECTION	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY: BLR
							DATE: 10-11-13
							CHK SILD
							SCALE NONE
							SHT 1 OF 1
							SIZE C
01	2-11-14	BLR	SILD	ALP	UPDATE I/O VOLTAGES	4628	
00	10-11-13	BLR	SILD	ALP	RELEASED	4606	