

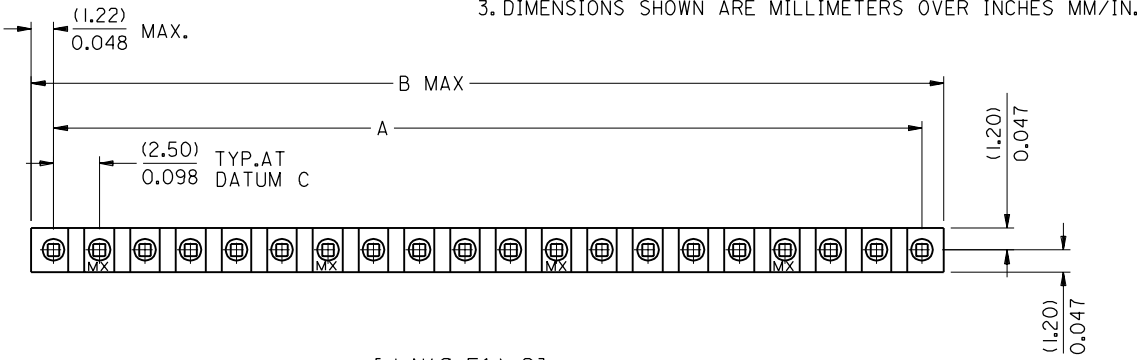
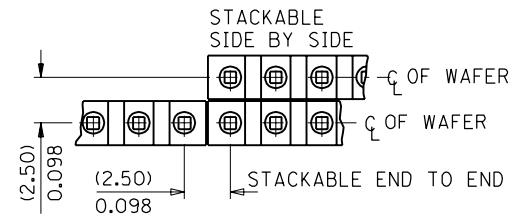


PART NO. 22-03-1-1-2
 DWG. NO. SDAE-3022-NB

NOTES :
 1. PIN PUSH OUT FORCE: 2 LBS. MIN.
 2. PIN SOLDERABILITY PER MOLEX ENG. STD. No. 53
 3. DIMENSIONS SHOWN ARE MILLIMETERS OVER INCHES MM/IN.

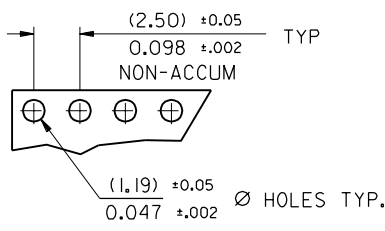

22-03-1202	AE-3022-20B	20	(47.5) ±0.25	(49.9)
↑	↑	↑	1.870 ±.010	1.965
-1192	-19B	19	(45.0) ±0.23	(47.4)
↑	↑	↑	1.772 ±.009	1.866
-1182	-18B	18	(42.5) ±0.23	(44.9)
↑	↑	↑	1.674 ±.009	1.768
-1172	-17B	17	(40.0) ±0.20	(42.4)
↑	↑	↑	1.575 ±.008	1.669
-1162	-16B	16	(37.5) ±0.20	(39.9)
↑	↑	↑	1.477 ±.008	1.571
-1152	-15B	15	(35.0) ±0.20	(37.4)
↑	↑	↑	1.378 ±.008	1.472
-1142	-14B	14	(32.5) ±0.18	(34.9)
↑	↑	↑	1.280 ±.007	1.374
-1132	-13B	13	(30.0) ±0.18	(32.4)
↑	↑	↑	1.181 ±.007	1.276
-1122	-12B	12	(27.5) ±0.18	(29.9)
↑	↑	↑	1.083 ±.007	1.177
-1112	-11B	11	(25.0) ±0.15	(27.4)
↑	↑	↑	.984 ±.006	1.079
-1102	-10B	10	(22.5) ±0.15	(24.9)
↑	↑	↑	.886 ±.006	.980
-1092	-9B	9	(20.0) ±0.13	(22.4)
↑	↑	↑	.787 ±.005	.882
-1082	-8B	8	(17.5) ±0.13	(19.9)
↑	↑	↑	.689 ±.005	.783
-1072	-7B	7	(15.0) ±0.13	(17.4)
↑	↑	↑	.591 ±.005	.685
-1062	-6B	6	(12.5) ±0.10	(14.9)
↑	↑	↑	.492 ±.004	.587
-1052	-5B	5	(10.0) ±0.10	(12.4)
↑	↑	↑	.394 ±.004	.488
-1042	-4B	4	(7.5) ±0.10	(9.9)
↑	↑	↑	.295 ±.004	.390
-1032	-3B	3	(5.0) ±0.10	(7.4)
↑	↑	↑	.197 ±.004	.291
22-03-1022	AE-3022-2B	2	(2.5) ±0.10	(4.9)
↑	↑	↑	.098 ±.004	.193
PART No.	ENG. No.	NO OF CKTS.	DIM. A	DIM. B

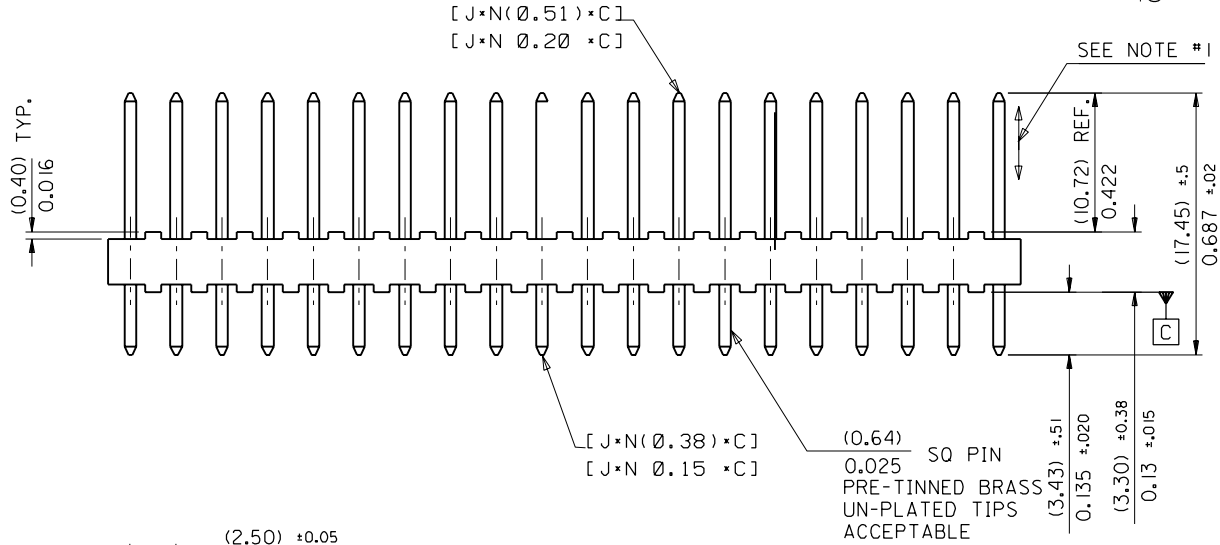

MAT'L: NYLON 6/6, 94V-0

RECOMMENDED P.C. BOARD HOLE DIMENSIONS

REDRAWN ON CAD EC NO. E80290 DRWN: P. MOORE 98/01/29 CH'K: / / / / APPR: / / / /	QUALITY SYMBOLS MAJOR = ▽ CRITICAL = ▽ C = ▽	GENERAL TOLERANCES: (UNLESS SPECIFIED) mm INCH 4 PLACES ±0. ±. 3 PLACES ±0. ±.008 2 PLACES ±0.2 ±.016 1 PLACE ±0.4 ±. ANGULAR: ± 1/2°	SCALE 4 : 1 DESIGN UNITS <input checked="" type="checkbox"/> mm <input checked="" type="checkbox"/> INCH DRAWN BY & DATE P. MOORE 98/01/29 CHECKED BY & DATE O. COSTEL 98/04/08 APPROVED BY & DATE M. WILHIT 98/04/08	DIMENSIONS: <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH <input type="checkbox"/> mm ONLY TITLE: WAFER-FLAT KK (2.5) / .098 0.025 SQ. PIN	SHT REV REVISE ON CAD ONLY
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	