


DRAWING MADE IN THIRD ANGLE PROJECTION


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19  
 © COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC		DIST		REVISIONS			
AF	50	ZONE	LTR	DESCRIPTION	DATE	APPROVED	
				D	REACTIVATED PER AF-5811	9/12/88	HSP <i>[Signature]</i>



IDENTIFICATION NO. FOR MAGNET WIRE RANGE

- 1 - FOR MAG-MATE CAVITY SPECIFICATION REFER TO APPLICATION SPEC #114-2066.
- 2 - CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 [ .330 ] CENTERS.
- 3 - DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4 - AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

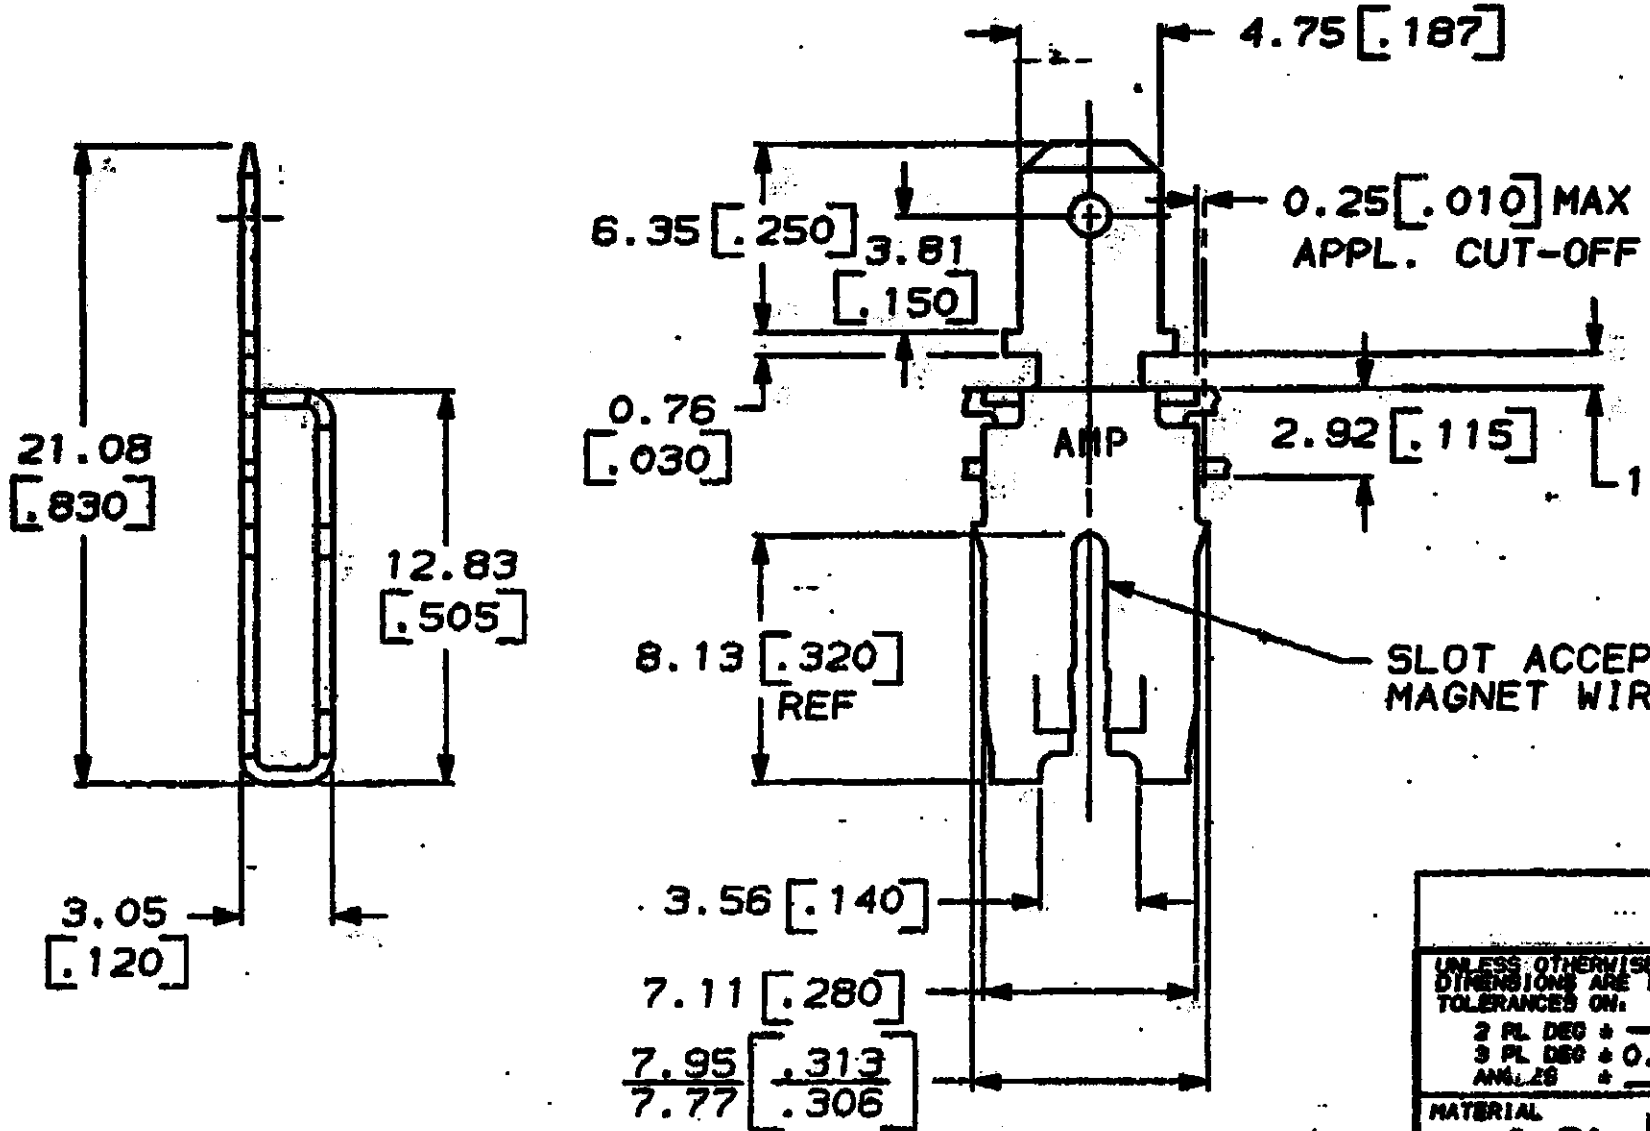

63428-1  
PART NO

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES - TOLERANCES ON: 2 PL DEC ± 3 PL DEC ± 0.38 [ .015 ] ANL 28 ±		DR JR RUTH 2-12-88	AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL 0.51 [ .020 ] BRASS		CHK G YETTER 2-12-88	NAME MAG-MATE .187 FASTON TAB	
FINISH TIN		APPD J SWARTZ 2-12-88	SIZE B	PSCH NO 00779
		APPD C ATHERTON 2-12-88	SCALE NTS	DRAWING NO 63428
		PRODUCT SPEC	SHEET 1 OF 1	
		APPLICATION SPEC		
		WEIGHT		

**METRIC**

CUSTOMER DRAWING