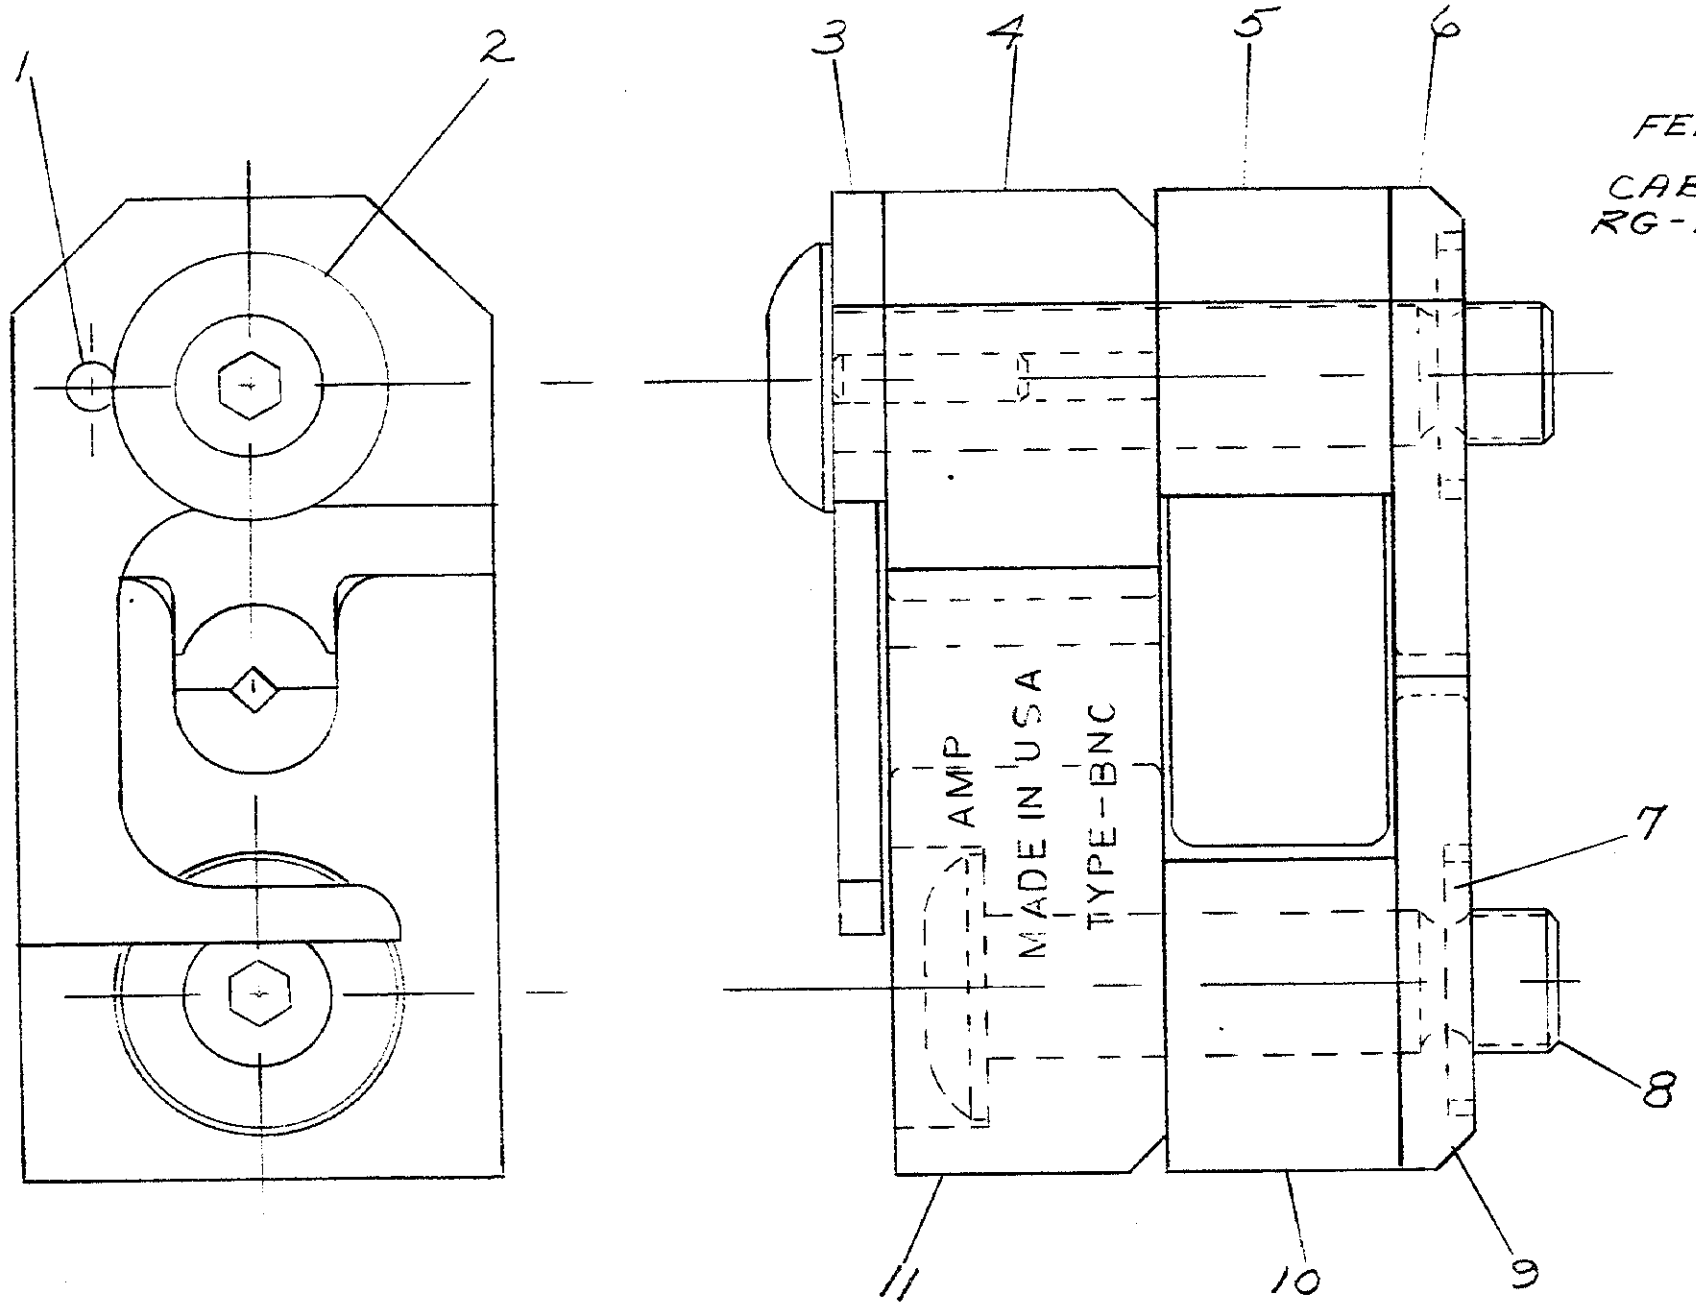

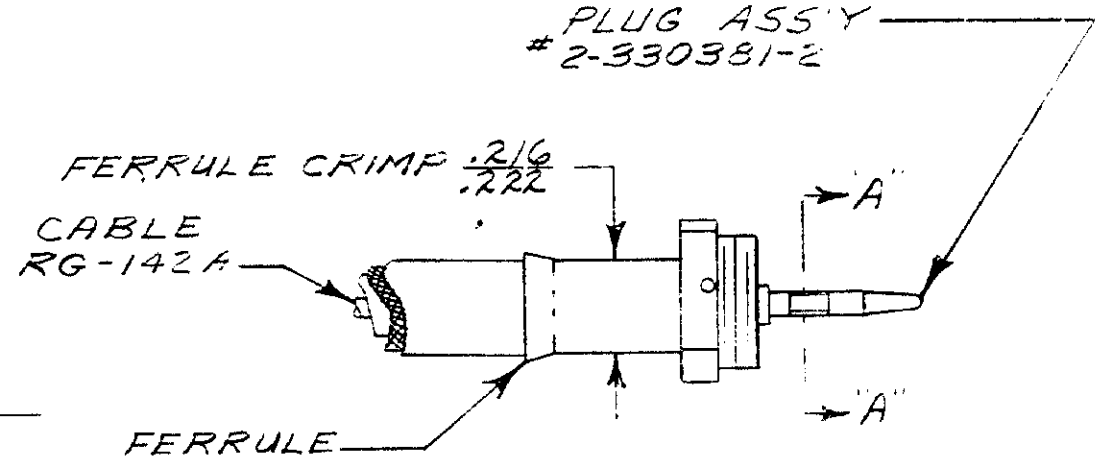

THE CRIMP DIM'S. APPLY ONLY TO THE ABOVE COMBINATIONS.

SECTION "AA" BARREL CRIMP

METHOD OF GAGING CRIMP DIM'S.

SUPERSEDED BY I.S. 2496

		NUMBER	NAME	ITEM NO
1	B	306205-5	INDENTER-INSULATION	11
1	A	5-305832-2	SPACER	10
1	B	306207-3	INSERT-BARREL-LOWER	9
1	A	7-306105-8	SCREW-SPECIAL	8
2	-	1-21046-3	RETAINING RING	7
1	B	306208-3	INSERT-BARREL-UPPER	6
1	A	5-305832-1	SPACER-SPECIAL	5
1	B	306206-5	ANVIL-INSULATION	4
1	A	1-306113-2	EJECTOR	3
1	A	4-306131-2	SCREW-SPECIAL	2
1	-	21028-2	PIN	1

DWG SIZE | NUMBER | NAME | REMARKS

REQUIRED PER ASSEMBLY

DESCRIPTION

©1964 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY REFERENCE ONLY

LTR	REVISION RECORD	DR	CHK	DATE
B	SUP BY I.S. 2496	EJF	EJF	8-7-64
A	REVISED	BS		8-7-64

NUMBER 69429-1

DR C. Moyer 10-21-63
CHK
DE
APP

MATERIAL AND FINISH —//—
WIRE-RANGE-INSULATION RG-142A —//—
TOLERANCE EXCEPT AS NOTED ± .015 = 1° 0'
SCALE 4-1

AMP INCORPORATED HARRISBURG, PENNA

CLASS —//—
TYPE BNC-COAX.
LOC M B NO 69429-1 REV B

NAME DIE ASS'Y

PRINT DIST 18

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

AMP 1253 REV 7/60