
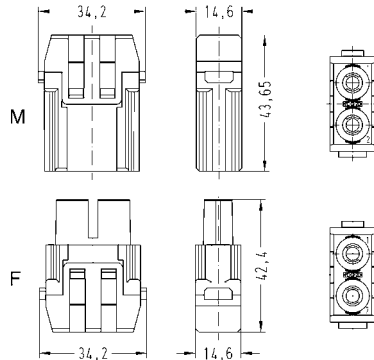

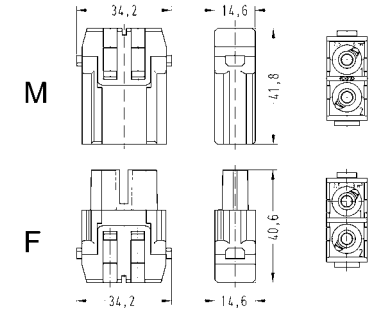

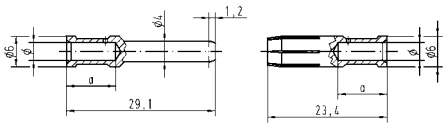


Number of contacts

2

1000 V
40 A

Han-Modular

| Identification | Wire cross section (mm ²) | Part number | | Drawing Dimensions in mm | | | | | | | | | | | | | | | | | | | | |
|---|---------------------------------------|--|--|--|-----------------|-----|------------------|----------------------------|------|--------|----------------------------|-----------------|-----------------|--------------------------|-----------------|--------|--------------------------|-----|--------|--------------------------|-----|-------|---|---|
| | | male | female | | | | | | | | | | | | | | | | | | | | | |
| Han-Modular®, Han® 40 A Crimp module, Crimp terminal  Please order crimp contacts separately. | | 09 14 002 3002 | 09 14 002 3102 |  Contact arrangement (view from termination side) | | | | | | | | | | | | | | | | | | | | |
| Han-Modular®, Han® 40 A Axial module, Axial screw terminal, silver plated contacts, contact resistance ≤0.3 mOhm  | 2.5–8 6–10 | 09 14 002 2601 09 14 002 2602 | 09 14 002 2701 09 14 002 2702 |  Contact arrangement (view from termination side) Stripping length <table border="1" data-bbox="1157 1534 1460 1590"> <tr> <td>mm²</td> <td>2,5</td> <td>4</td> <td>6</td> <td>10</td> </tr> <tr> <td>mm</td> <td>5⁺¹</td> <td>5⁺¹</td> <td>8⁺¹</td> <td>11⁺¹</td> </tr> </table> Tightening torque <table border="1" data-bbox="1157 1612 1460 1668"> <tr> <td>mm²</td> <td>2,5</td> <td>4</td> <td>6</td> <td>10</td> </tr> <tr> <td>Nm</td> <td>1,5</td> <td>1,5</td> <td>2</td> <td>2</td> </tr> </table> | mm ² | 2,5 | 4 | 6 | 10 | mm | 5 ⁺¹ | 5 ⁺¹ | 8 ⁺¹ | 11 ⁺¹ | mm ² | 2,5 | 4 | 6 | 10 | Nm | 1,5 | 1,5 | 2 | 2 |
| mm ² | 2,5 | 4 | 6 | 10 | | | | | | | | | | | | | | | | | | | | |
| mm | 5 ⁺¹ | 5 ⁺¹ | 8 ⁺¹ | 11 ⁺¹ | | | | | | | | | | | | | | | | | | | | |
| mm ² | 2,5 | 4 | 6 | 10 | | | | | | | | | | | | | | | | | | | | |
| Nm | 1,5 | 1,5 | 2 | 2 | | | | | | | | | | | | | | | | | | | | |
| Han® C, Crimp contact, silver plated contacts, contact resistance ≤1 mOhm  | 1.5 2.5 4 6 10 | 09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109 | 09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209 |  <table border="1" data-bbox="1013 1870 1460 2004"> <thead> <tr> <th>Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm² AWG 16</td> <td>1.75</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm² AWG 12</td> <td>2.85</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm² AWG 10</td> <td>3.5</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm² AWG 8</td> <td>4.3</td> <td>12 mm</td> </tr> </tbody> </table> | Wire gauge | ∅ | Stripping length | 1.5 mm ² AWG 16 | 1.75 | 9.5 mm | 2.5 mm ² AWG 14 | 2.25 | 9.5 mm | 4 mm ² AWG 12 | 2.85 | 9.5 mm | 6 mm ² AWG 10 | 3.5 | 9.5 mm | 10 mm ² AWG 8 | 4.3 | 12 mm | | |
| Wire gauge | ∅ | Stripping length | | | | | | | | | | | | | | | | | | | | | | |
| 1.5 mm ² AWG 16 | 1.75 | 9.5 mm | | | | | | | | | | | | | | | | | | | | | | |
| 2.5 mm ² AWG 14 | 2.25 | 9.5 mm | | | | | | | | | | | | | | | | | | | | | | |
| 4 mm ² AWG 12 | 2.85 | 9.5 mm | | | | | | | | | | | | | | | | | | | | | | |
| 6 mm ² AWG 10 | 3.5 | 9.5 mm | | | | | | | | | | | | | | | | | | | | | | |
| 10 mm ² AWG 8 | 4.3 | 12 mm | | | | | | | | | | | | | | | | | | | | | | |