

MODEL:

PDUMV30NET

Switched Rackmount PDU



Low Voltage Input/Output




24 Outlets



30A Max Capacity



Multimode Load Meter



Network Interface




0U Rackmount





Toolless Mounting Buttons

- A** Digital Load Meter
- B** 5-15/20R Outlets with On/Off LEDs
- C** 20A Circuit Breakers
- D** Removable Cord Retention Brackets
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** 10 ft. Input Power Cord
- H** L5-30P Twist-Lock Input Plug
- I** Durable Metal Case
- J** Network Interface
- K** RJ45 Ethernet Jack
- L** Manual Configuration Port
- M** Environmental Monitoring Port
- N** Network Interface Reset Button






AC Input Connection: Insert L5-30P twist-lock plug into compatible L5-30R utility, generator or UPS outlet.


Also Includes: Cable Ties, Owner's Manual

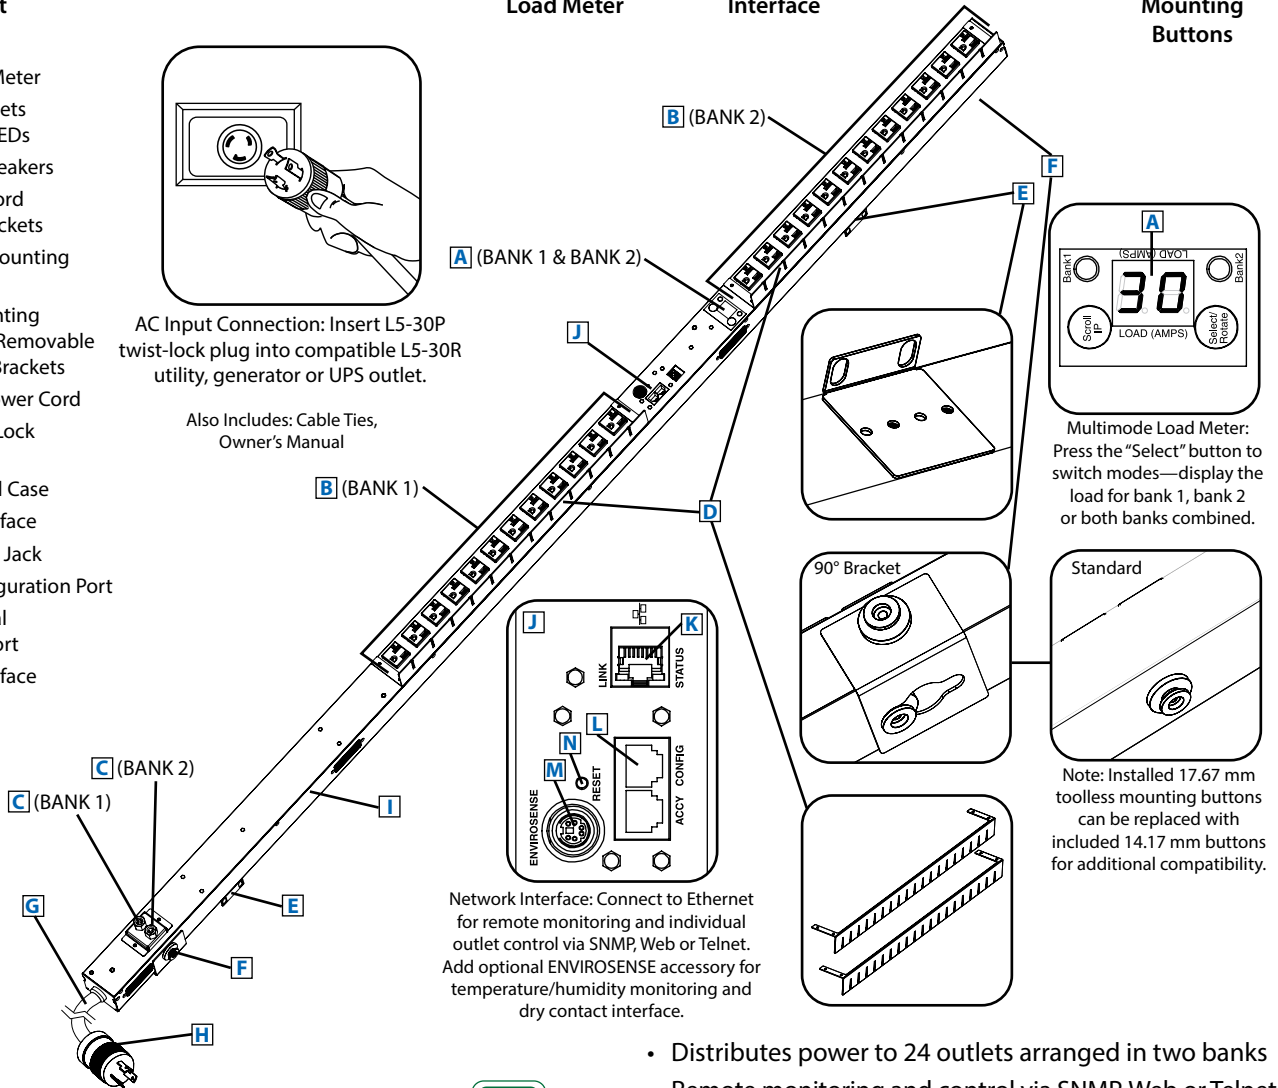


Multimode Load Meter: Press the "Select" button to switch modes—display the load for bank 1, bank 2 or both banks combined.



Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.



Network Interface: Connect to Ethernet for remote monitoring and individual outlet control via SNMP, Web or Telnet. Add optional ENVIROSENSE accessory for temperature/humidity monitoring and dry contact interface.



Specifications

Model	PDUMV30NET
Voltage	100-125V
Frequency	50/60 Hz
Maximum Capacity	30A
Agency-Derated Capacity	24A
Input Connector	L5-30P
Cord Length	10 ft.
Outlets	24 (5-15/20R)
Primary Mounting Option	0U (Vertical) Rackmount
Unit Weight & Dimensions	14.1 lb / 70 x 2.19 x 2.65 in. (H x W x D) <i>See next page for detailed unit measurements.</i>
Regulatory Compliance	Meets UL 60950-1 (US & Canada), NOM (Mexico), FCC Class A, RoHS standards




Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

- Distributes power to 24 outlets arranged in two banks
- Remote monitoring and control via SNMP, Web or Telnet
- Displays load for either outlet bank or both banks combined in real time
- Perfect for rackmount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS








1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

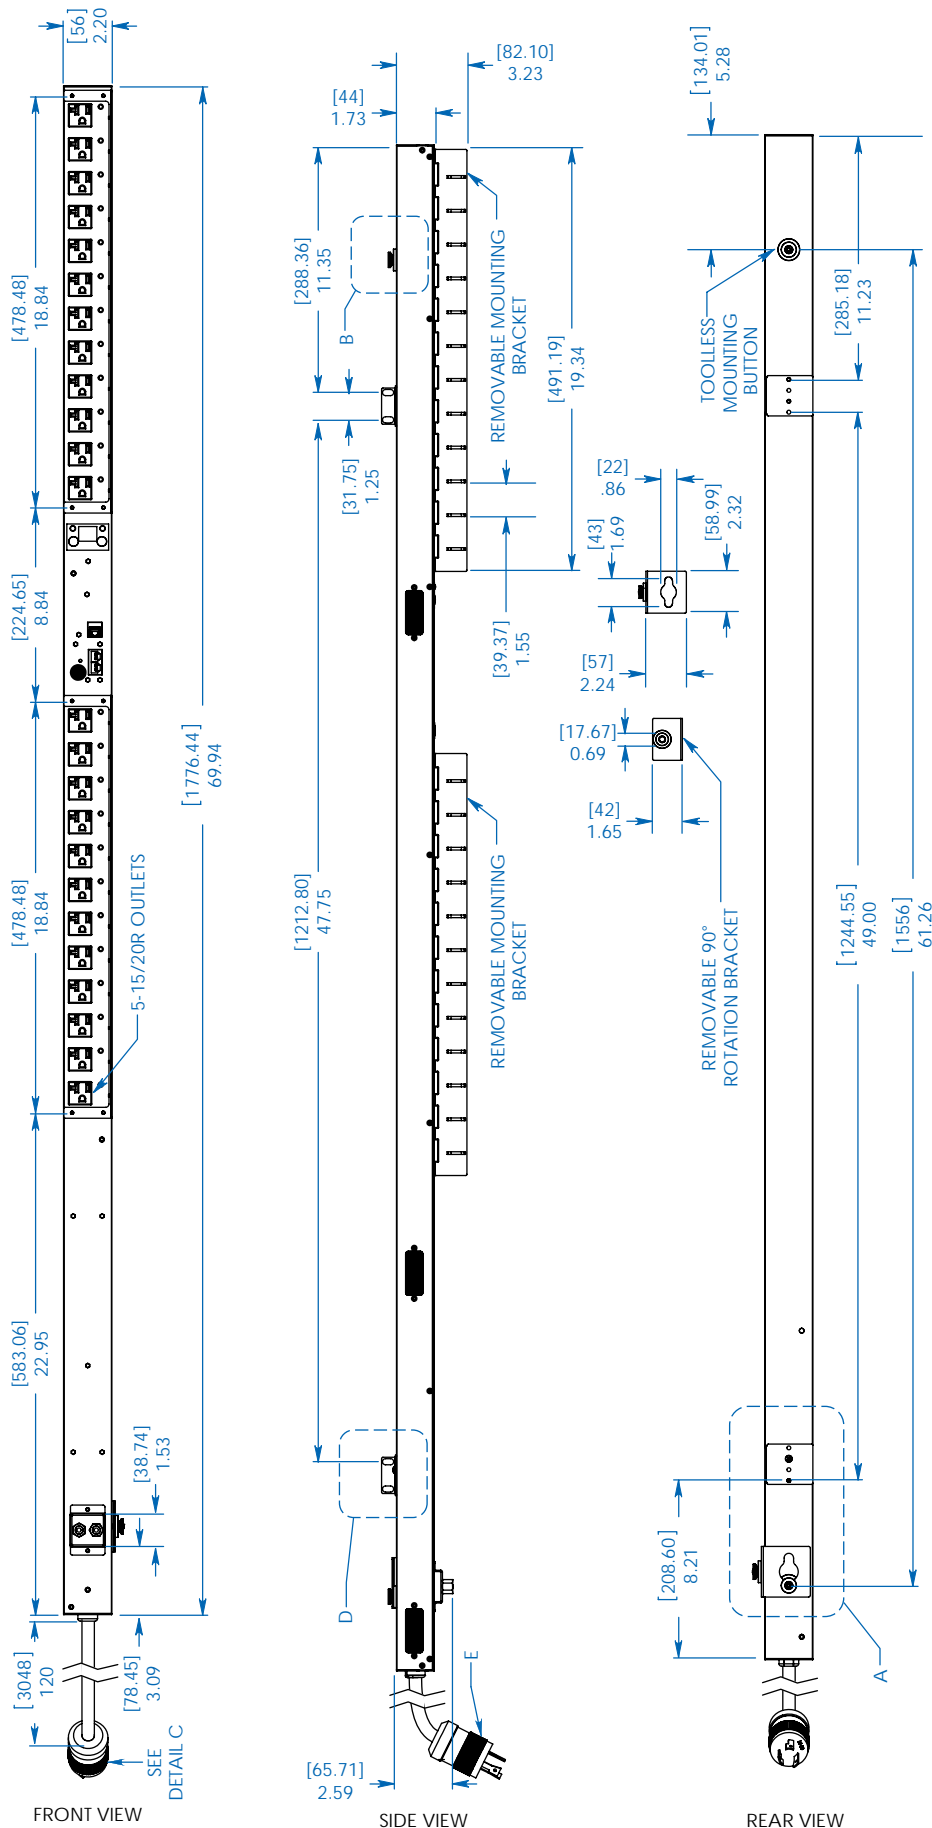

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.



MODEL:
PDUMV30NET
TRIPP-LITE

1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.triplite.com