


Use the image below as a template for determining screw placement when mounting unit directly to wall. When mounting the SS420/450, make sure to leave at least 3 inches of clearance from the top and sides of the antenna to ensure the best wireless signal.



6723 Odyssey Drive // Huntsville, AL 35806  
(877) 982-7888 // [synapse-wireless.com](http://synapse-wireless.com)

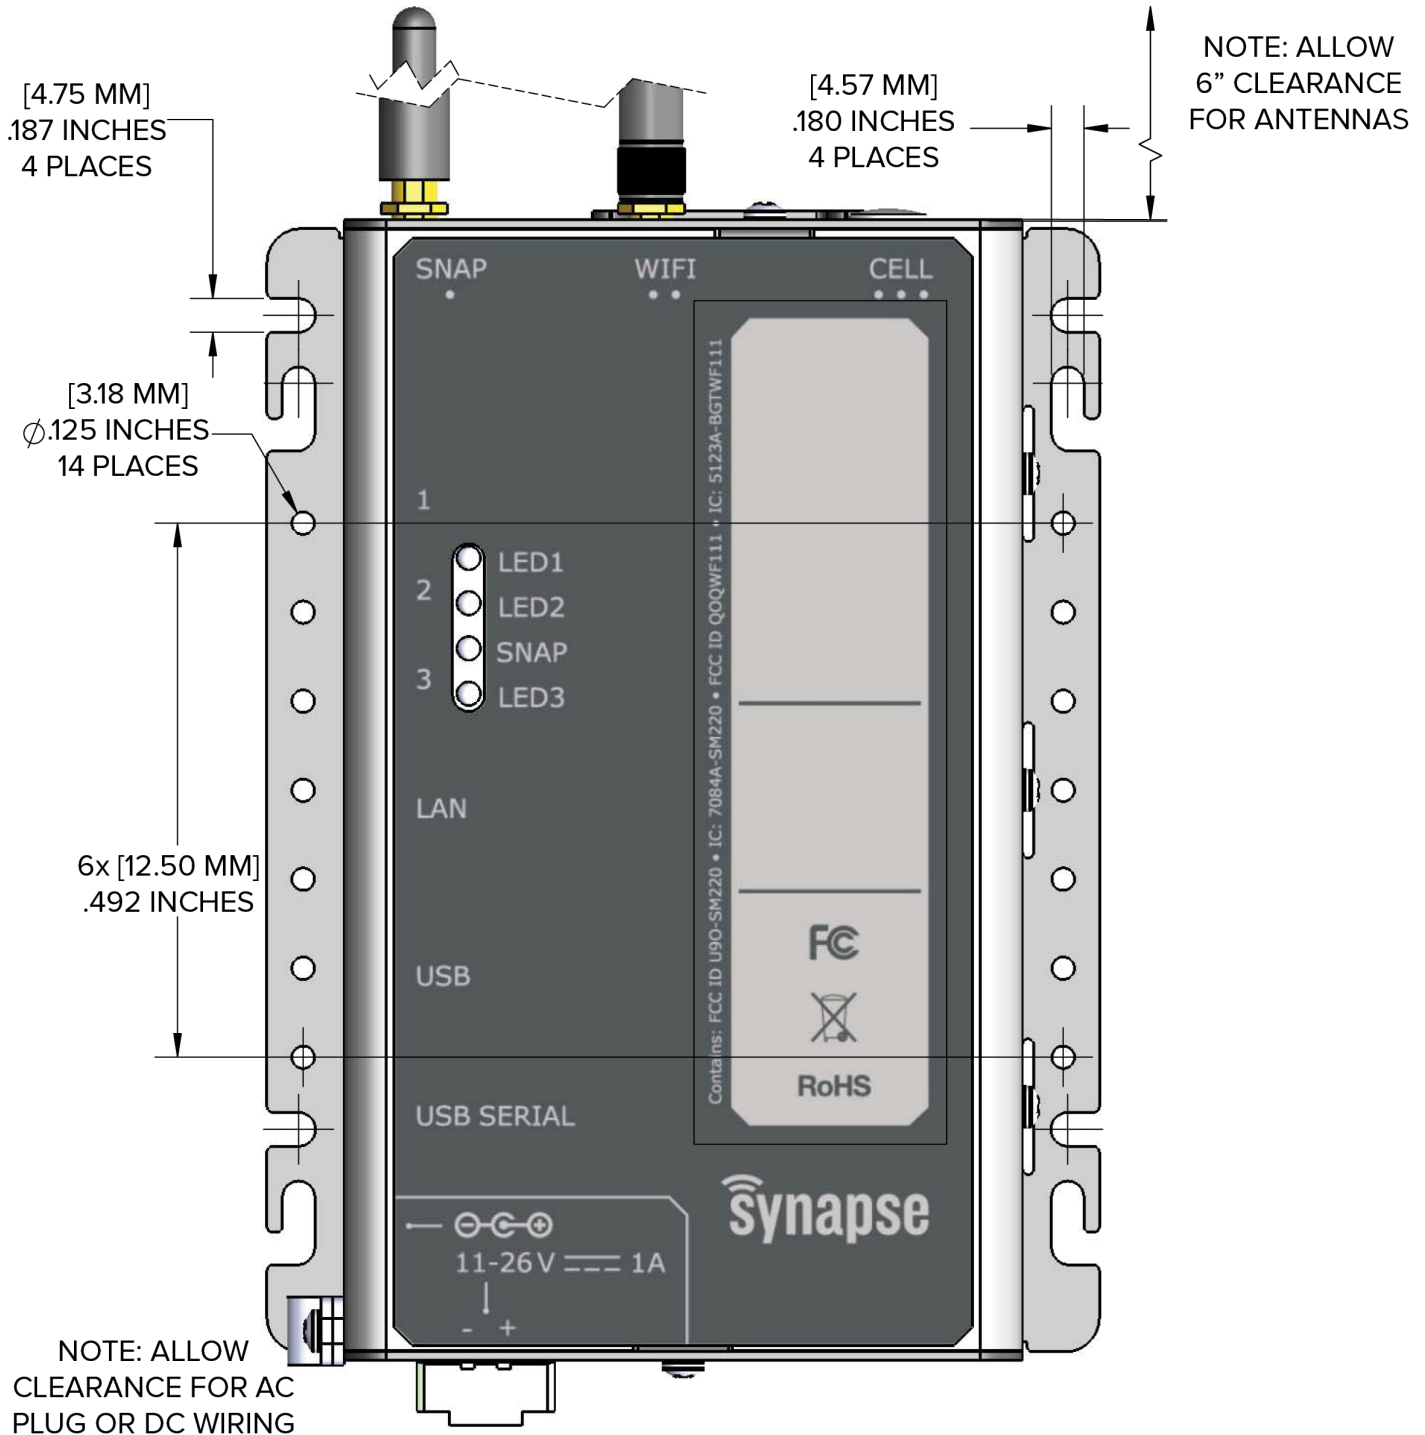

©2008-2017 Synapse Wireless, All Rights Reserved. All Synapse Wireless products are patent pending. Synapse Wireless the Synapse Wireless logo, SNAP, and Portal are registered trademarks of Synapse Wireless.

WHEN MOUNTING TO A DIN RAIL, INSTALL PART OR ALL OF KIT 120-012154-099-(REVISION) AS SHOWN.

