

## SUMMARY

### # Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	3E
Termination type	Female solder
IP rating	68
Cable Ø	10.60 - 12.00 mm
Matching parts	FFA.3E.275.CLAK11E
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	PCA*: Free receptacle with oversize cable collet
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 10.6 - 12 mm
Variant	E : Gasket and O-ring in EPDM

### Performance

Configuration	3E.275 : 1 Coax (75 Ohm)
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	15 Amps

### Specifications

Contact Type:	Solder
Vtest:	2700 V (AC), 3900 V (DC)
Impedance:	75 Ohm
VSWR:	1.04 + 0.05 * f/GHz
Cable type:	RG 213/U, RG 115 A/U, RG 11 A/U, RG 144/U, RG 165 /U


## Others

Endurance (Shell): 5000 mating cycles  
Temp (min / max): -55°C / +200°C  
Humidity (max): <=95% [at 60 deg C / 140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Salt Spray Corrosion: >1000 hr  
Climatical Category: 50/175/21  
Shielding (min): 95 dB (10 MHz)  
Shielding (min): 80 dB (1 GHz)  
IP Rating: 68

---

## DRAWINGS

### Draws

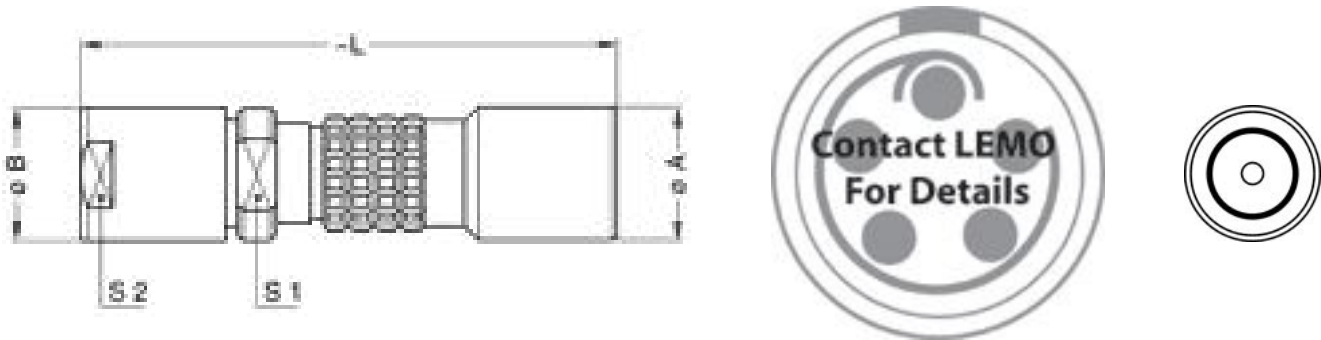

### Dimensions

	A	B	L	S1	S2
mm.	23	22	84	19	19
in.	0,91	0,87	3,31	0,75	0,75

---

## RECOMMENDED BY LEMO

### Tools

Spanner wrench: DCD.3E.030.PA150

### Cables