


AFCI PART NO.

10123462-R0026YYLF

| WIRING LIST | |
|-------------|-----|
| P1 | P2 |
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| --- | --- |
| 18 | 18 |
| 19 | 19 |
| 20 | 20 |

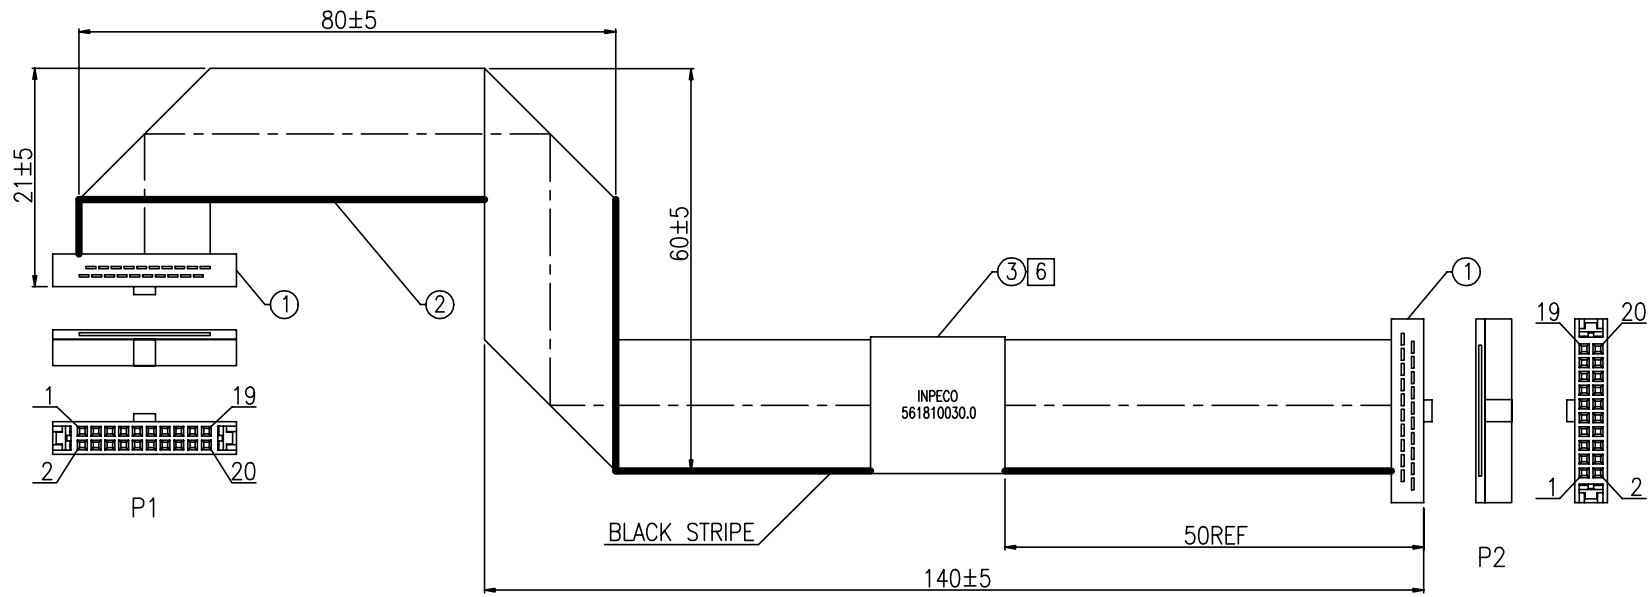

NOTES:

1. MATERIAL: SEE BOM ON SHEET 1.
2. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
3. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST.
4. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE TESTED:
 HI-POT: DC 300V/10ms
 DIELECTRIC RESISTANCE: 10M Ohms MIN.
 CONNECTION RESISTANCE: 4 Ohms MAX.
5. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

B **6**. LABEL SHOULD BE PRINTED WITH BLACK TEXT AS SHOW BELOW:

INPECO
561810030.0

| | | | | | | |
|----------|-------------|----------------|---|-------------------------------|---------------------------------------|--|
| B | 1 | EA | ADHESIVE LABEL: W=25mm, COLOR:WHITE, PRINT BLACK | | | 3 |
| | A/R | FT | FLAT CABLE: UL2678, 0.635PITCH, 30AWG, 20PIN, COLOR:GRAY | | | 2 |
| | 2 | EA | IDC CONNECTOR: 1.27PITCH, 2X10PIN, 10u" Au PLATING, COLOR:BLACK | | | 1 |
| | Q'TY | UNIT | DESCRIPTION | | | ITEM |
| | mat'l. code | | surface ISO 1302 | tolerance ISO 406 ISO 1101 | projection | product family Cable Assembly |
| | ltr | ecn no | dr | date | tolerances unless otherwise specified | title |
| | A | / | Harry | 03/08'13 | angles linear | 1.27PITCH IDC CABLE ASSEMBLY |
| | B | N-24535 | Carl | 07/20'16 | | |
| | | | | | | scale N/A |
| | | | dr | Carl Wang | 07/20'16 | |
| | | | enrg | Carl Wang | 07/20'16 | |
| | | | chr | Caspar Lin | 07/20'16 | |
| | | | appd | Caspar Lin | 07/20'16 | |
| | sheet index | revision sheet | B | 1 | | dwg no 10123462 type Customer Drawing |
| | | | | | | sheet 1 of 1 size A3 |