


- Electrical test:
- 100% short, open, miss wire test
 - Conduct resistance: 1 Ohm(max)
 - Insulation resistance: 10Mohm(min)
 - Dielectric test: DC 300V

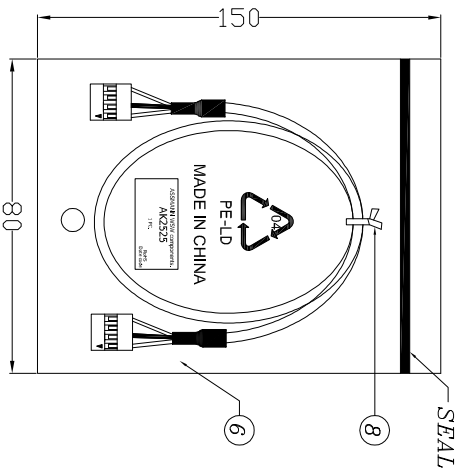

PIN ASSIGNMENT			
P1	WHITE	P2	4
1	DRAIN		2
3	RED		1
4			

NO.	NAME	QTY	SPECIFICATION
⑧	TIE	1	WHITE L=60mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE: 80*150*0.05mm PRINT BLACK"MADE IN CHINA"
⑤	TUBE	2	HEAT SHRINK TUBE BLACK OD1.0*L=38±1mm
④	TUBE	2	HEAT SHRINK TUBE BLACK OD3.0*L=10±1mm
③	TER	6	DuPont TER PH2.54mm MATERIAL:BRASS TIN-PLATED CRIMP TYPE
②	HSG	2	DuPont HSG 1*4P PH:2.54mm COLOR:BLACK
①	CABLE	1	UI 2547 28AWG*2C(WHITE:RED)+D JACKET GREY(A-112#) OD2.8mm

RoHS compliant

Unit: mm

Scale	Free	Customer-No.	
TOLERANCE		Drawn	20.02.2017 Amy
		Approved	20.02.2017 Amy
DIM	TOL	ASSMANN WSW-No. AK2525	
Angle	TOL	Drawing-No. ASS 7880 CA	
		Replace Sheet	
Id.	Modification	Drawing-No. ASS 7880 CA rev00	
①	Drawn	Date 20.02.2017 Name Amy	

ASSMANN
WSW components

1 2 3 4 5 6 7

A B C D E F G H