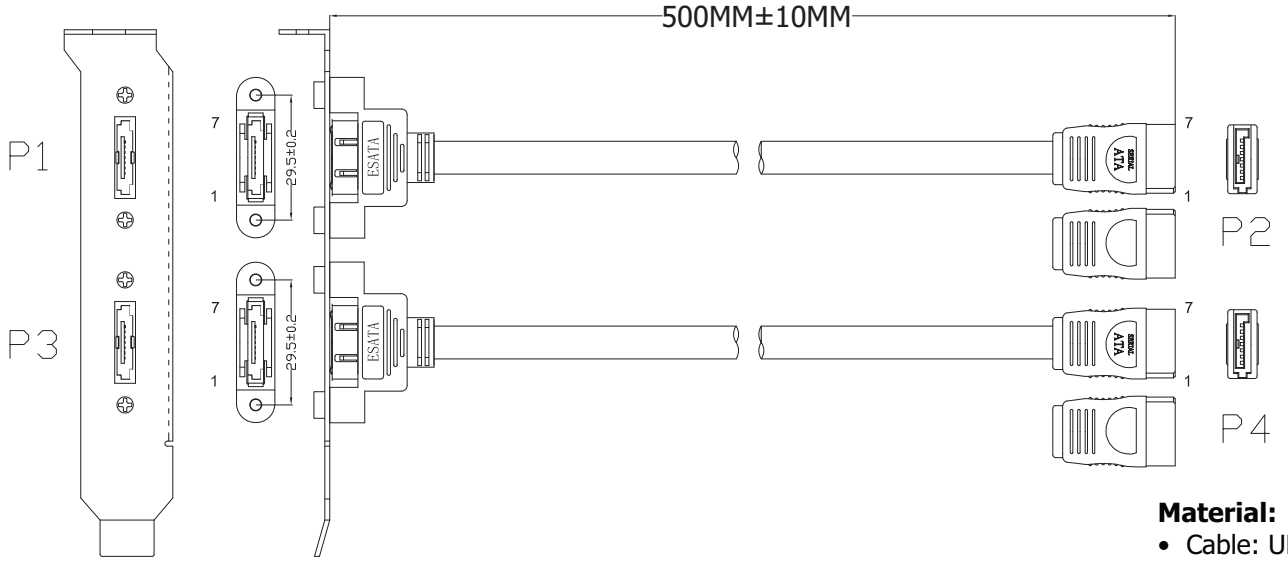

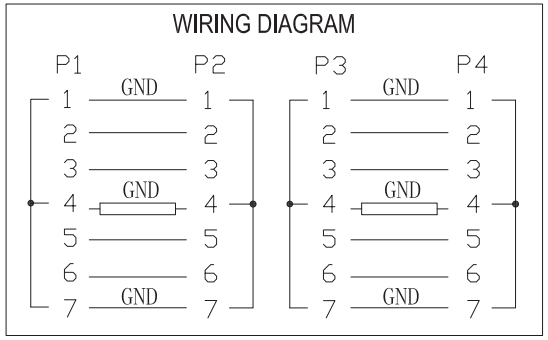

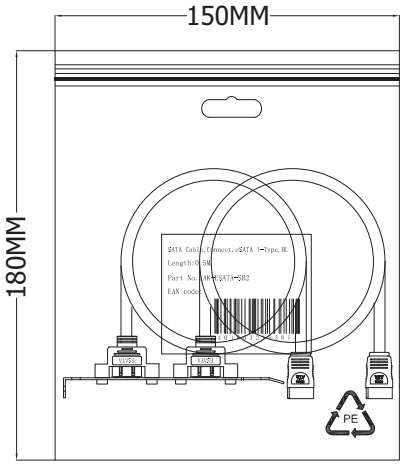

Label

Material:

- Cable: UL2725 [26AWG(1/0.404)*2+D(1/0.32)*2+AL]*2F
  - OD 2.2*7.8MM
  - Jacket Red (200C/RD-16#)
- P1/P3 Connector: eSATA 7P/M Solder Type
  - Pin G/F
  - Insulator Black Metal
  - Shell Plate Nickel
- P2/P4 Connector: Serial ATA Female 7Pin
  - Pin G/F
  - Crimp type connector
  - Insulator Black
- Screw: M3.0*10MM (M3.0 screwcap)

Electrical:

- 100% Open Short & Miswire Test
- Conductive Resistance: 2Ω (Max.)
- Insulation Resistance: 5MΩ (Min.)
- Hi-Pat Test 300V DC

RoHS Complaint

Scale	1:1						Name
TOLERANCE					Drawn	12.29.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		

ASSMANN WSW components

Item No.

AK-ESATA-SB2-R

Title

Slotbracket with External Serial ATA(eSATA) Dual connector

Drawing No.

rev00

Replace

Sheet