



DIMENSIONS:	
A	3.125" ±0.063
B	3.436" ±0.125
C	3.796" ±0.063
D	2.500" ±0.063
E	2.188" ±0.063
G	0.203" x 0.400" ±0.015

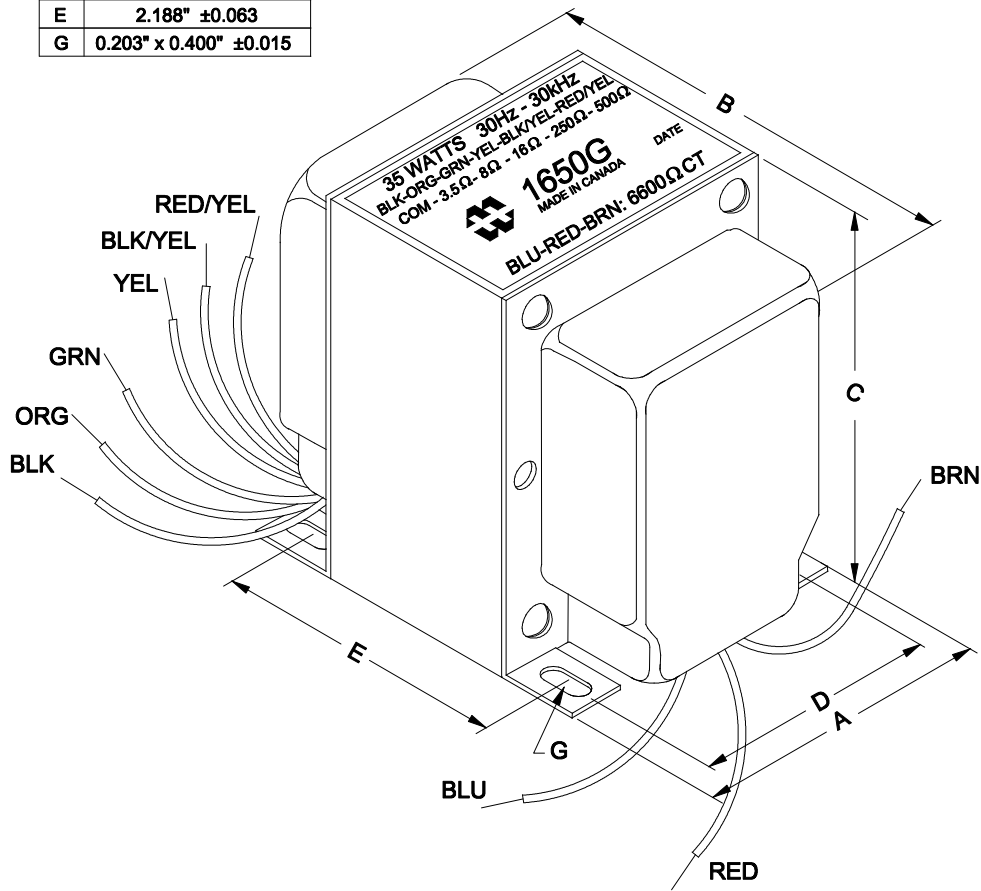

NOTE: ALL LEADS 8" OUT MIN.

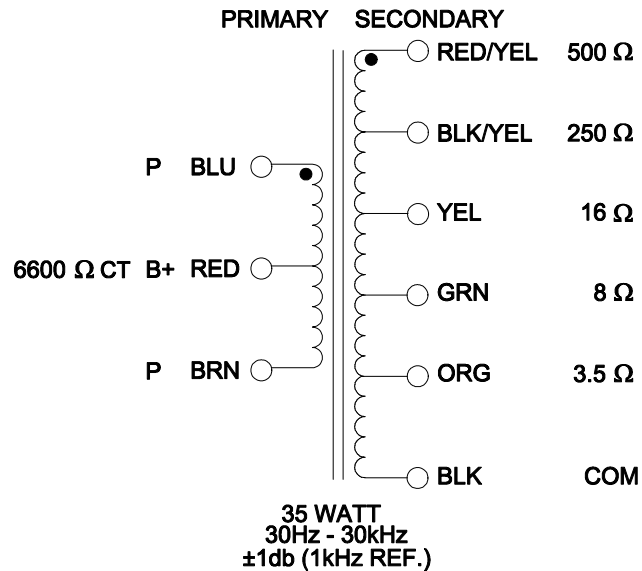

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 240V, 60Hz, BLU - BRN	9.3mA Max.
Sec. N.L.V	@ 240V, 60Hz, BLU - BRN	
	BLU - RED = RED - BRN =	120.0V ±2%
	BLK - ORG =	5.958V ±2%
	BLK - GRN =	8.342V ±2%
	BLK - YEL =	11.44V ±2%
	BLK - BLK/YEL =	48.62V ±2%
	BLK - RED/YEL =	65.54V ±2%
DCR	@ 20°C, BLU - RED =	56.93 Ω ±20%
	@ 20°C, RED - BRN =	60.95 Ω ±20%
	@ 20°C, BLK - ORG =	0.259 Ω ±20%
	@ 20°C, BLK - GRN =	0.364 Ω ±20%
	@ 20°C, BLK - YEL =	0.498 Ω ±20%
	@ 20°C, BLK - BLK/YEL =	6.727 Ω ±20%
	@ 20°C, BLK - RED/YEL =	9.550 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		PH # (519) 886-6181 FAX # (519) 886-9540
0	RELEASED.	08/13/13	MANUFACTURING™		
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: 1650G TRANSFORMER
			DATE: 08/13/13	APP'D. BY:	
				DIMENSIONS: IN(X) MM()	DWG. NO. 1650G

52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5