


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/23/02	BS
B	REDRAW TO NEW FORMAT, RFS. 7964, DMR	02/16/06	BS
C	ADD ROHS, RFS. 12106, KT	10/02/07	HM
D	REVISE: C19 TO C20A, CABLE TO 105°C, RATING TO 20A, BULK PACK TO 10 pcs, RFS. 23040, JN	06/04/12	HM
E	REVERT TO 16A AS MARKED ON CONNECTOR; CORRECT END 'B' TO 'C19' FROM 'C20A', RFS. 23607, BS	10/02/12	HM

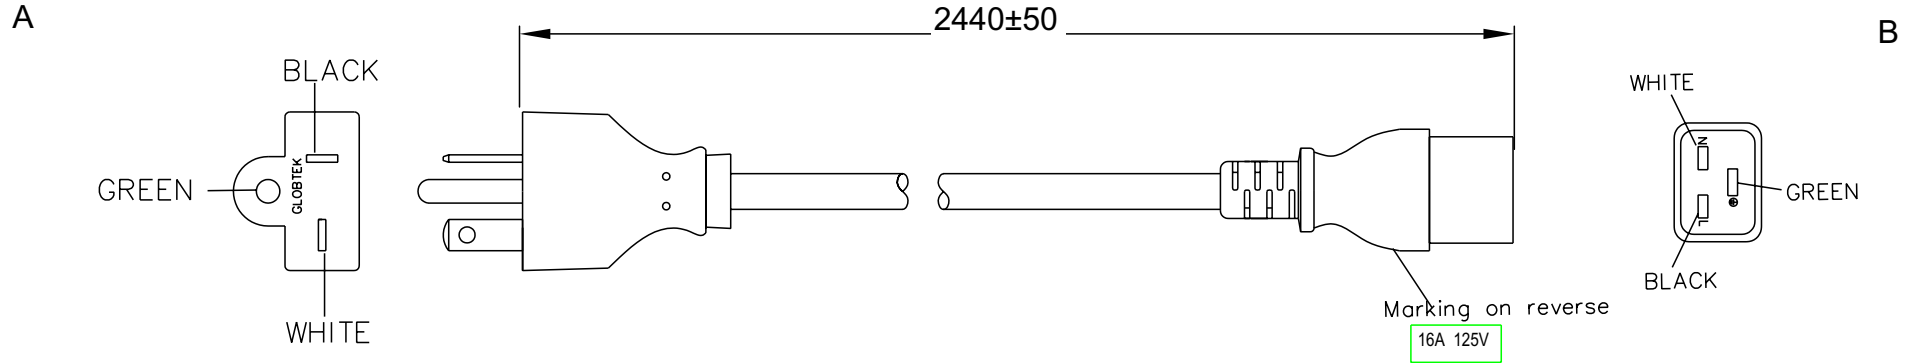

**GENERAL SPECIFICATIONS:**

RATING: 16A / 125V AC  
 CABLE TYPE / SIZE: SJT, 12 AWG x 3C  
 TEMPERATURE RATING: 105° C  
 CONDUCTOR COLORS: BLACK / WHITE / GREEN  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH (L): 2440 ± 50 mm  
 CABLE OUTER DIAMETER: 11 ± 0.2 mm  
 END 'A' TERMINATION: NEMA 5-20P  
 END 'B' TERMINATION: IEC 320 / C19  
 APPROVALS PLUG: UL, CSA or cUL  
 APPROVALS CABLE: UL, CSA or cUL  
 APPROVALS CONNECTOR: UL, CSA or cUL

**PACKING:**

BULK PACKED, BUNDLES OF 10 pcs.  
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



**NOTES:**

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
		<b>TOLERANCES:</b> DECIMALS    ANGULAR .xx +/- 0.1    +/- 1° .xxx +/- .005		<b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS    ANGULAR .xx +/- 0.3    +/- 1° .xxx +/- .013		
INIT.BY: DMR	DATE: 02/16/06	<b>DWG TITLE: NORTH AMERICAN DETACHABLE CORDSET</b>		REV. E SHEET 1/ 1
DRAWN: NF	DATE: 02/16/06	FSCN No.: G, E	SIZE: A	
APRVD: DMR	DATE: 02/16/06	SCALE: NONE	PART NO: <b>3201368F7032(R)</b>	

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice