



RECOMMENDED P.C.B. LAYOUT  
SCALE 4:1



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
  3. TERM. NOS. FOR REFERENCE ONLY.
  4. RATINGS: 12VDC, 50mA
  5. OPERATING FORCE: 100±50gf
  6. TRAVEL: 0.25±0.1mm
  7. CONTACT RESISTANCE: 100 MILLI Ω Max.
  8. DIELECTRIC STRENGTH: 250V RMS min.
  9. INSULATION RESISTANCE: 100 Mega Ω min.
  10. ELECTRICAL LIFE: 100,000 CYCLES min.
  11. ▲ DENOTES CRITICAL PARAMETER
  12. 2002/95/EC (ROHS) COMPLIANT

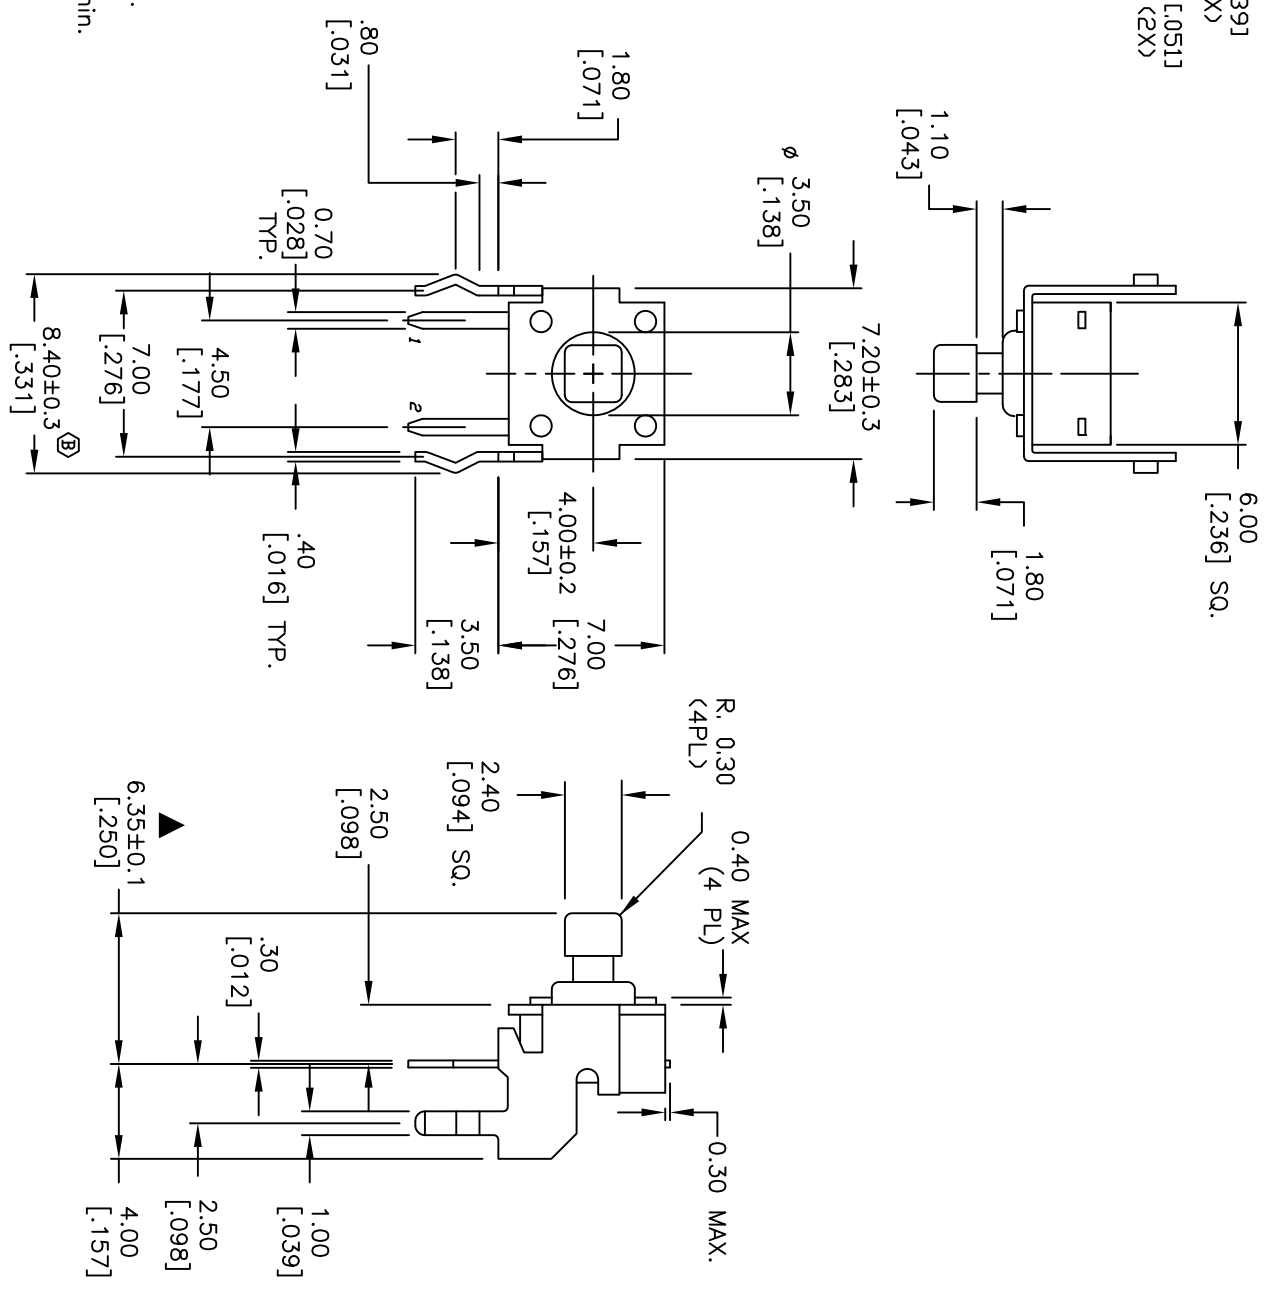

REV. B		P020201		DWG		BLR		DR		11/12/08		DATE		SCALE 3:1	
REV. A		12210		PCR No.		DESCRIPTION		DATE		CHKD		CB		11/12/08	
REV. B		18313		LEG TOLERANCE WAS +/- 0.1		RELEASED FOR PRODUCTION		DATE		CHKD		BLR		11/12/08	
<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED</p>															
<p>TL1105J F100 Q</p>															
<p>E-SWITCH</p>															
<p>TITLE</p>															