
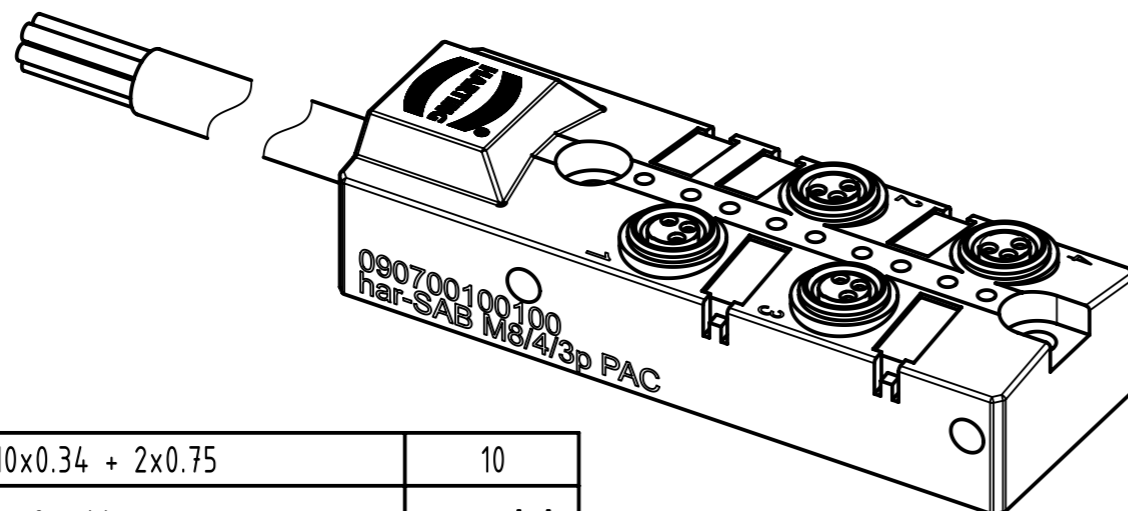


Loading plan

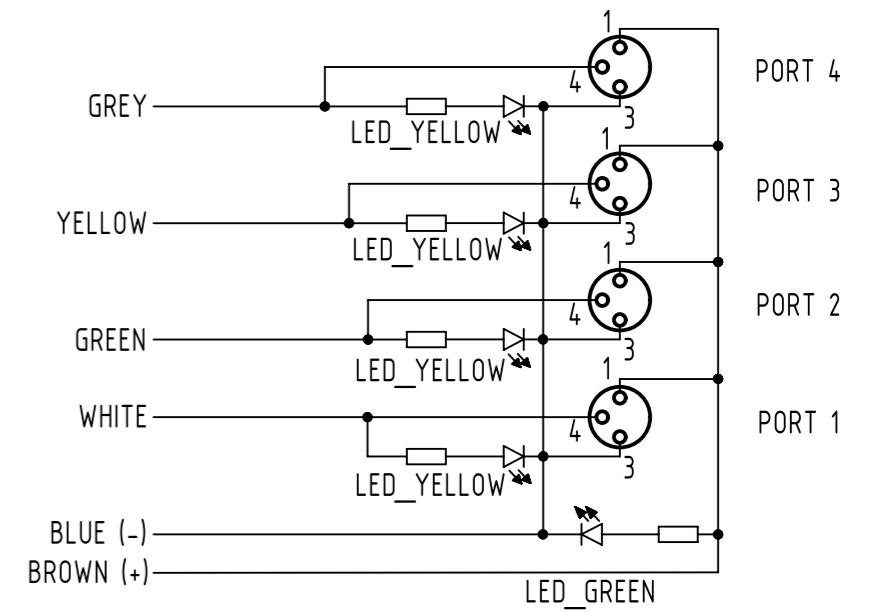

- Protection level: IP 67
- Temperature range: -25°C...+80°C

- Electrical data:
- Rated voltage: 15-30V DC
 - Nominal: 2 A per Contact
 - Current: 6 A max total

PUR, max. 10x0.34 + 2x0.75	10
Type of cable	Dim. a[m]

	All rights reserved	Created by	Inspected by	Standardisation	Date	State
	Department HCS - RO	MUNTEANV	POPESCU	AVRAM	2017-04-24	Final Release
HARTING Customised Solutions		Title		Doc-Key / ECM-Nr.		Page
D-32427 Minden		har-SAB M8/4/3p PAC		100689666/UGD/000/C 500000118447		
		Type	Number	Rev.		1/1
		TB	090700100100	C		