

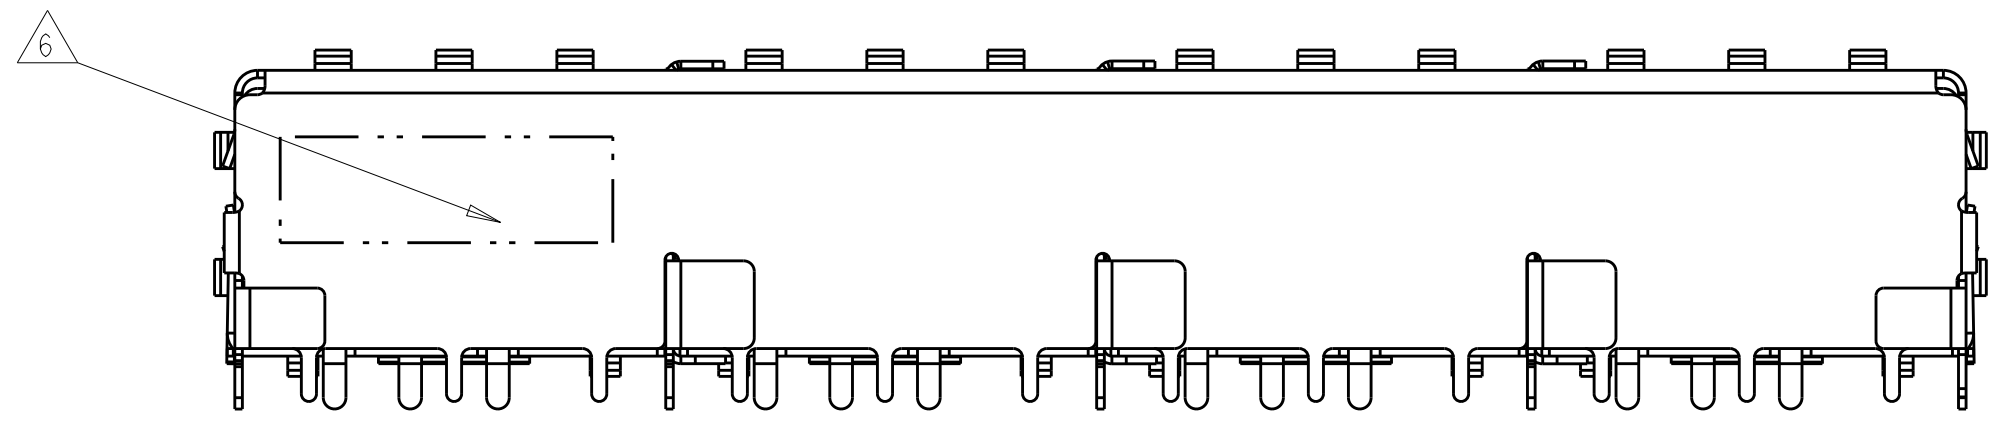
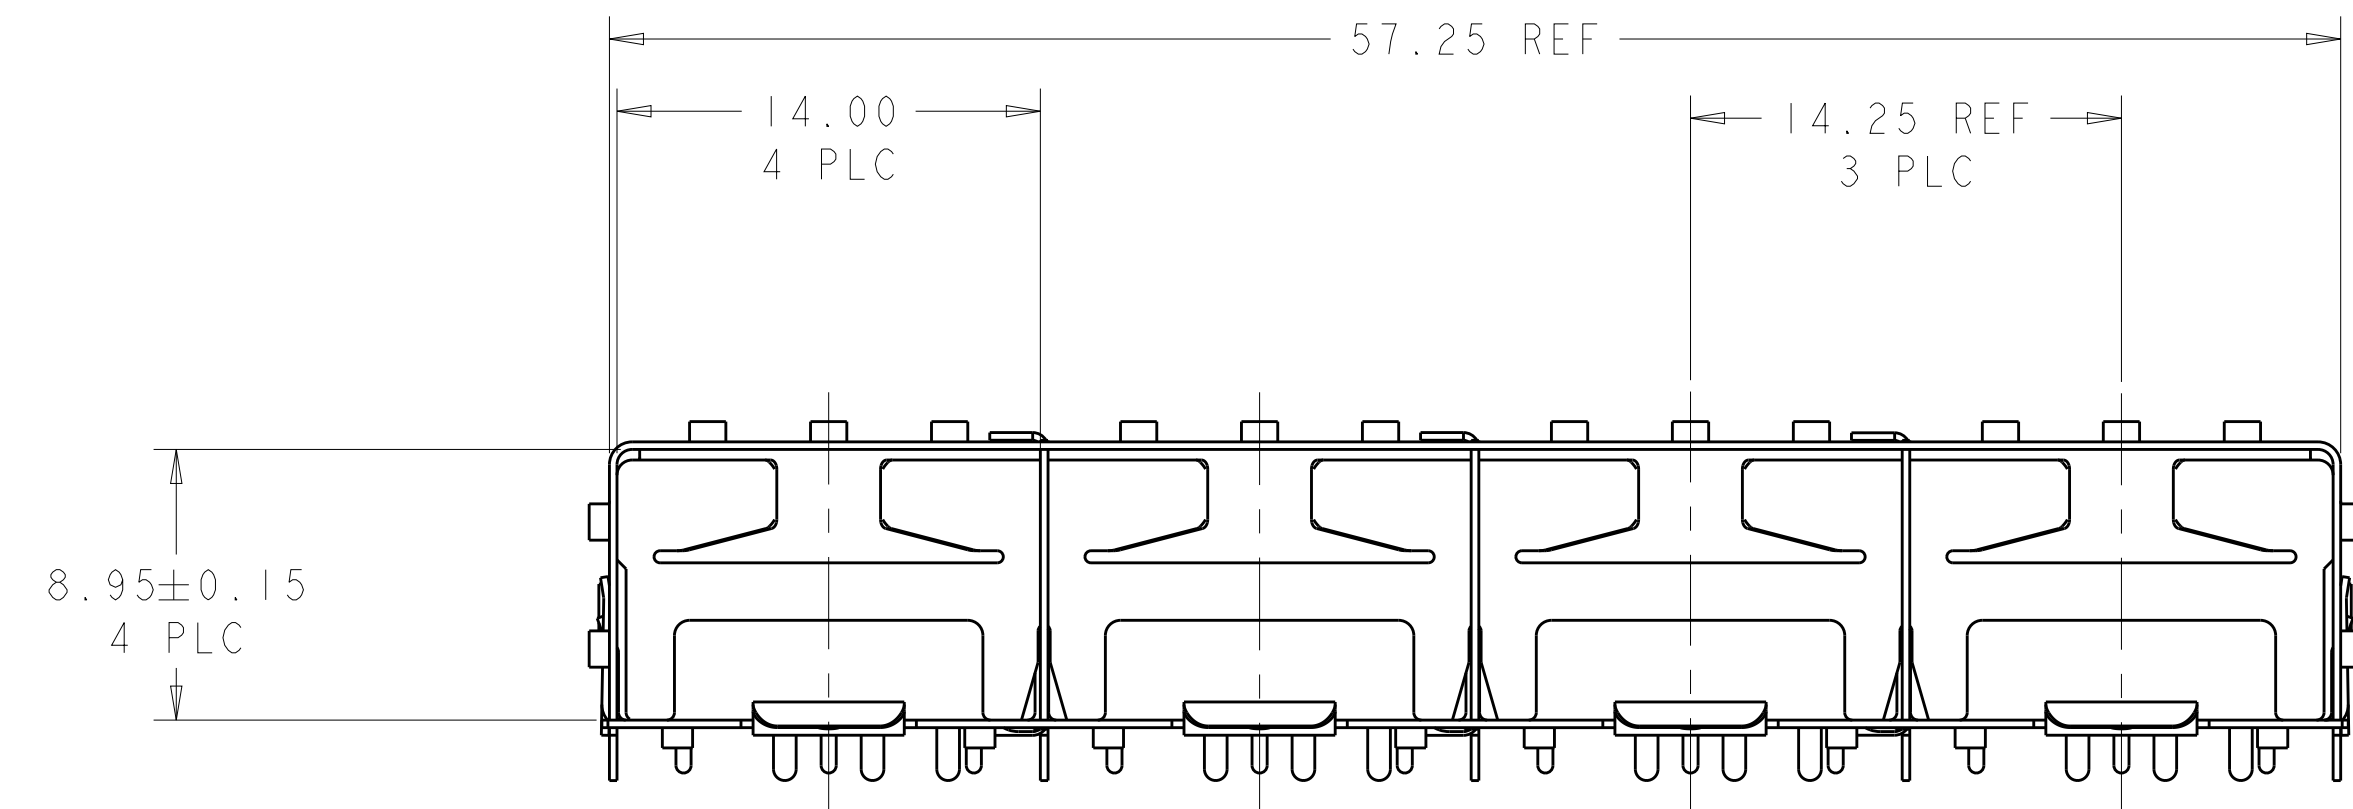
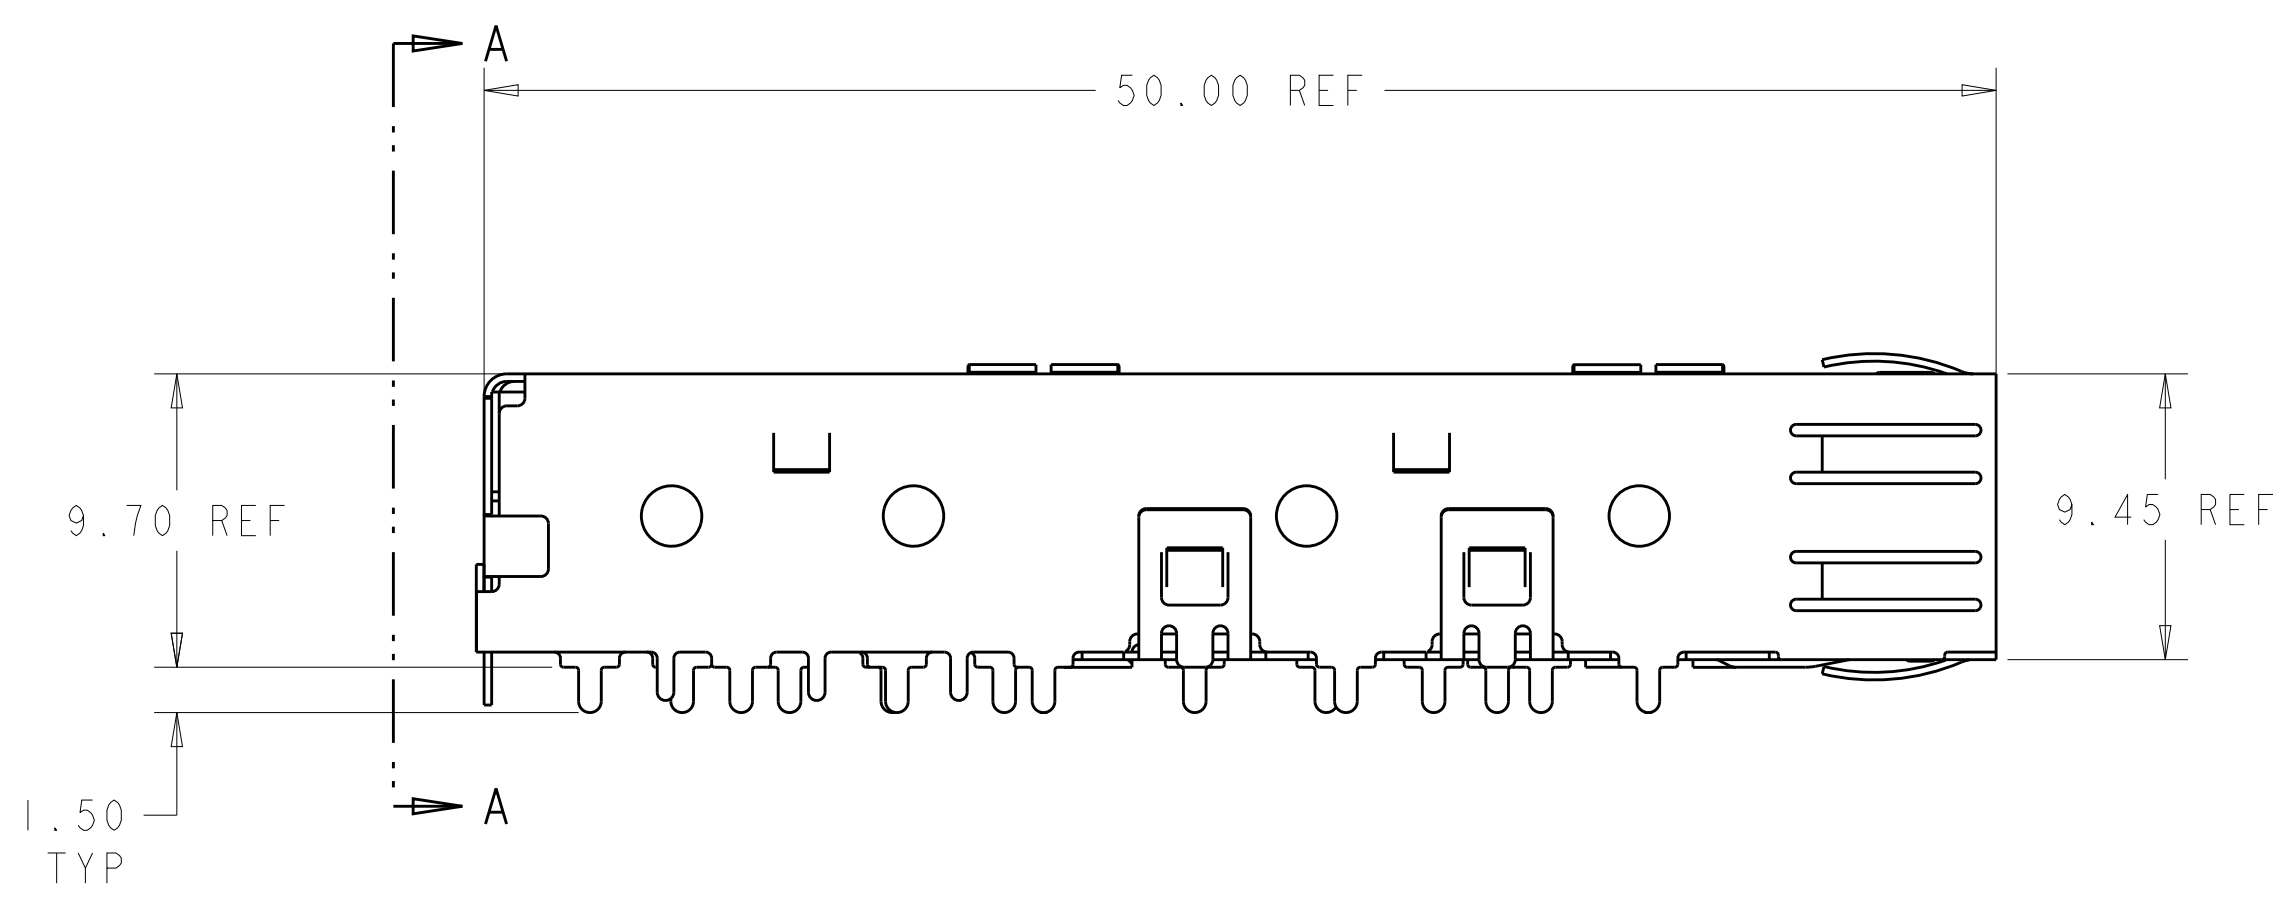
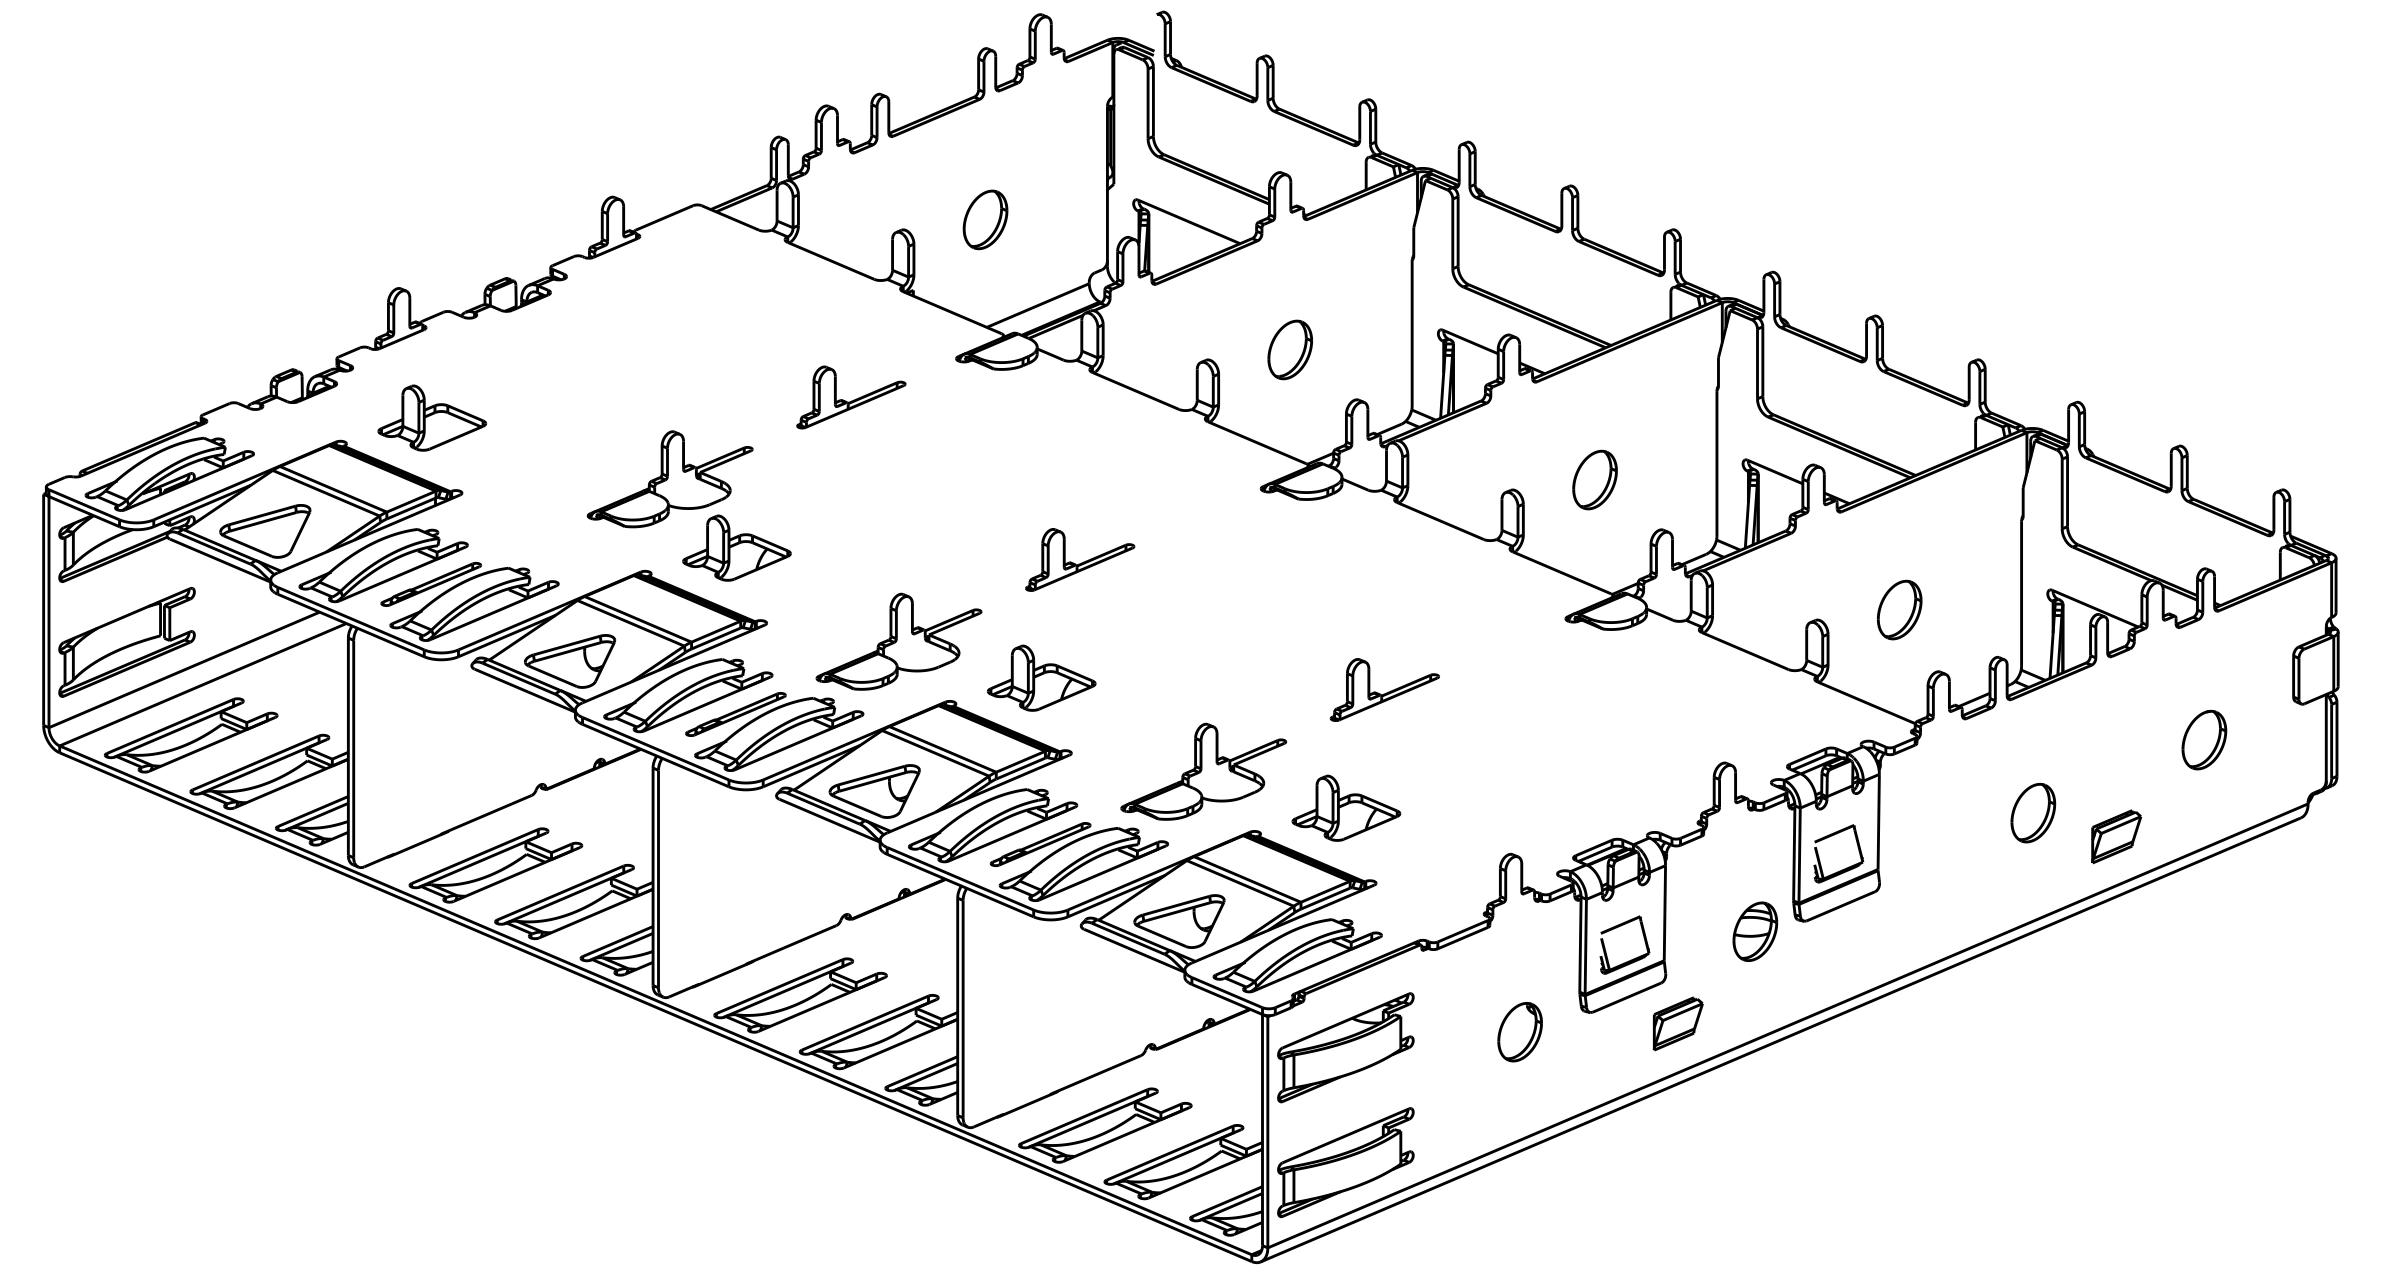


LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD
GP	00				
	D1	REVISED PER ECO-11-004835	11MAR2011	RK	HMR
	E	REVISED PER ECO-14-000886	20FEB2014	JW	SH
	E1	REVISED PER ECO-14-004667	26MAR2014	JW	SH
	E2	REVISED PER ECO-14-010419	11JUL2014	JW	SH

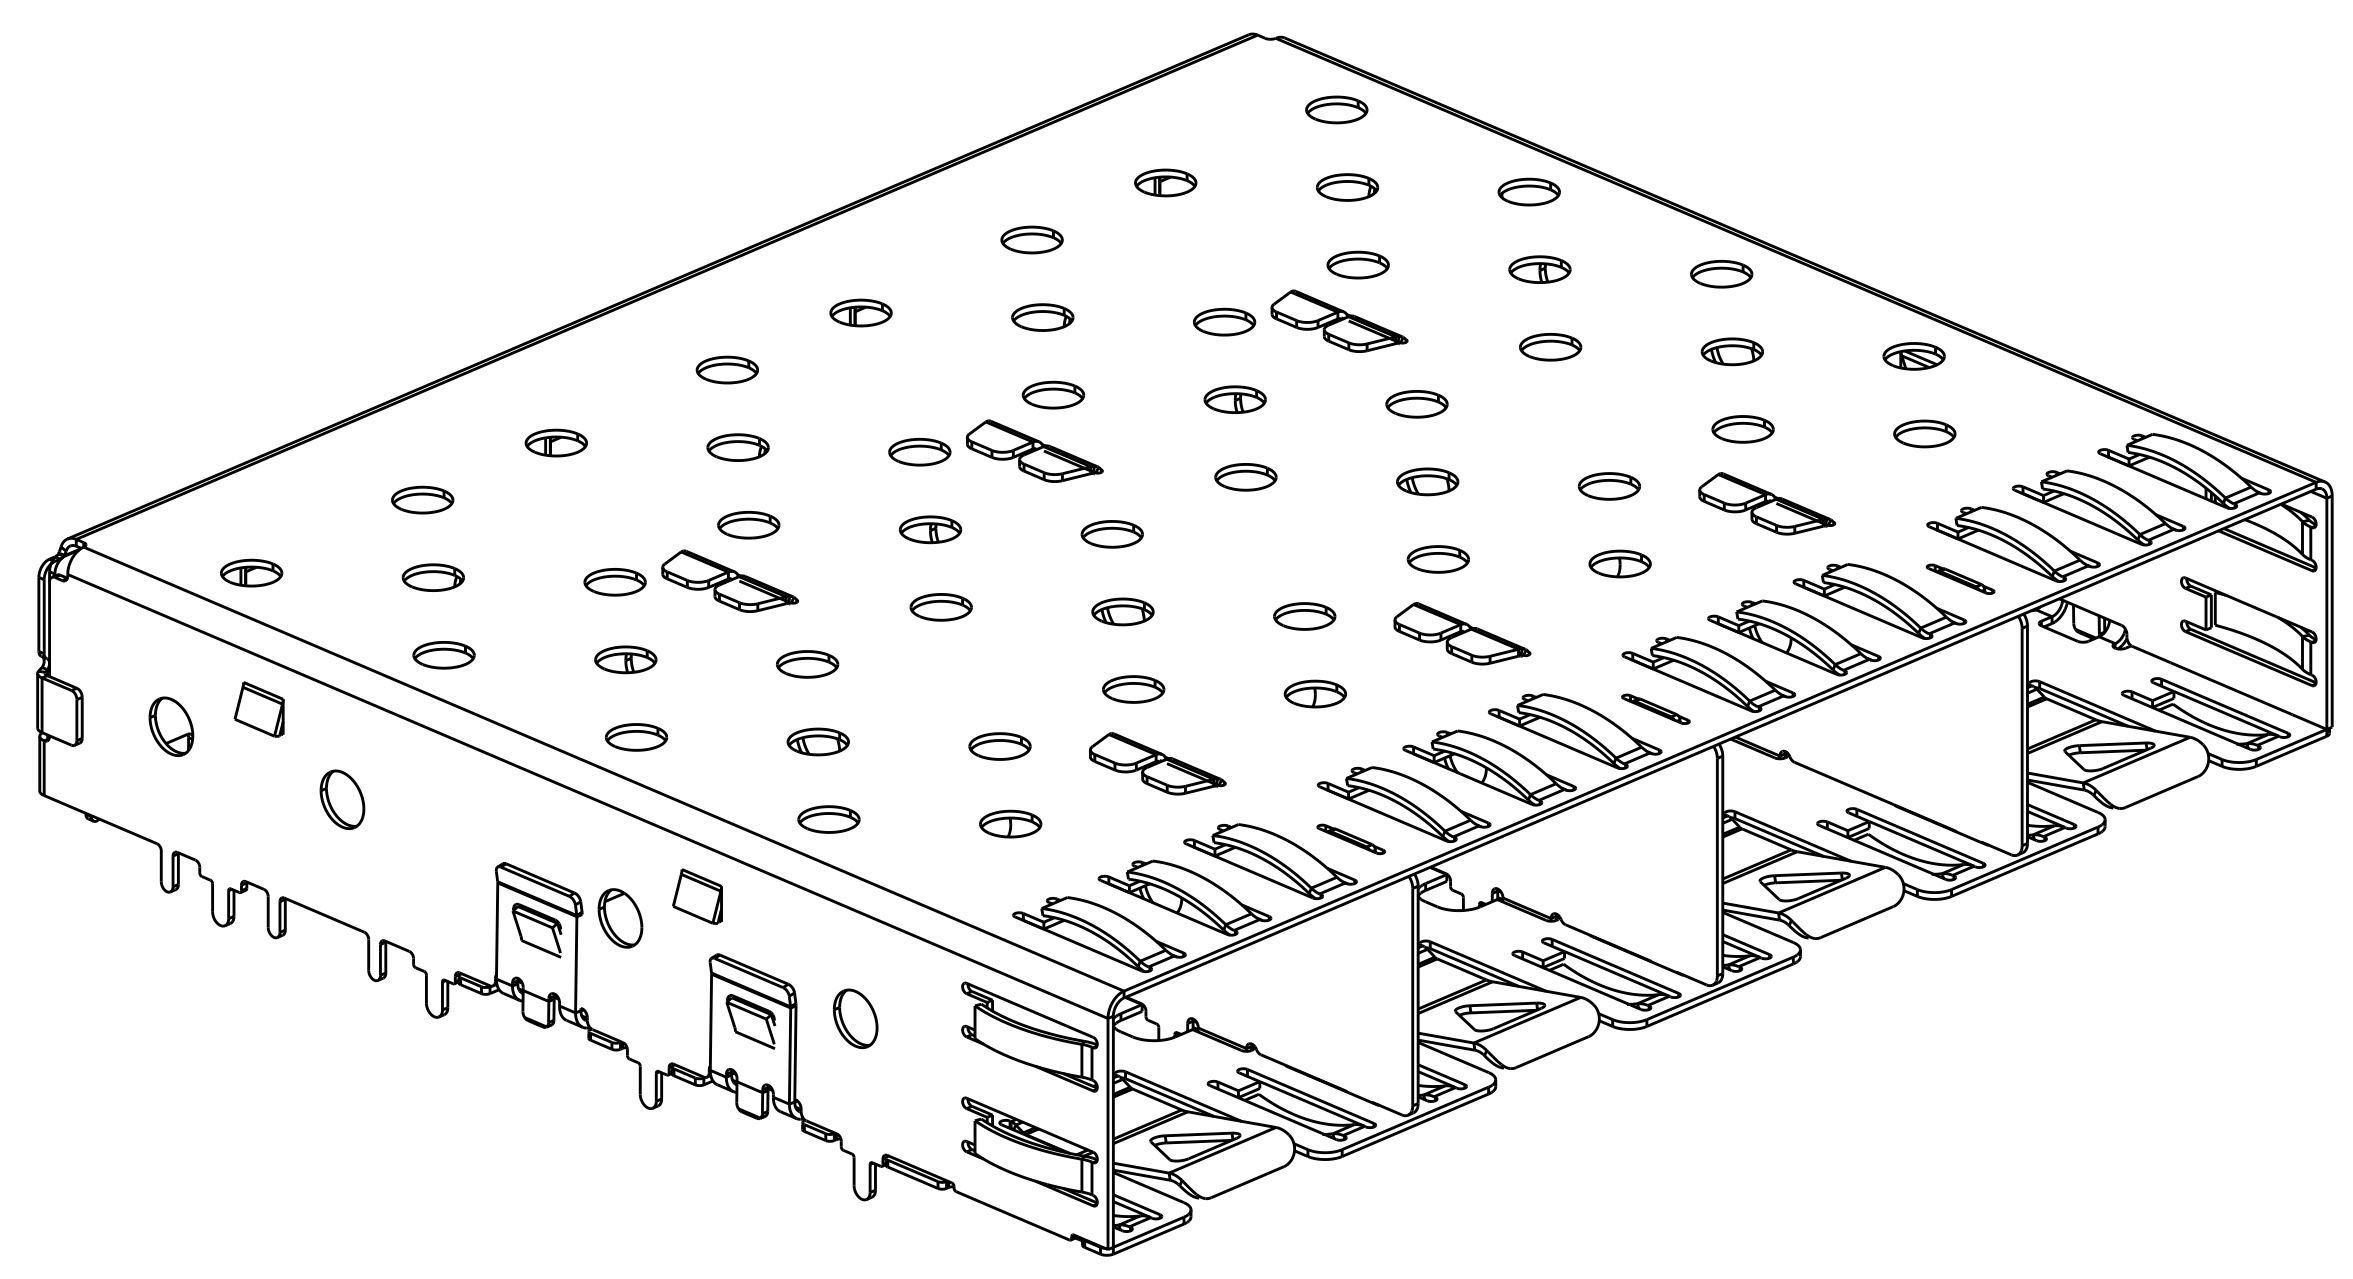

SECTION A-A

- △ MATERIAL: 0.25MM THICK COPPER ALLOY.
- △ FINISH: 1.25µm MINIMUM TIN PER ASTM B 545 OVER NICKEL FLASH PER QQ-N-290. NONPLATED EDGES PERMISSIBLE.
- △ PADS AND VIAS CHASSIS GROUND.
- △ DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- △ COMPANY LOGO IN APPROXIMATE AREA SHOWN.
- △ DATE CODE AND PART NUMBER IN APPROXIMATE AREA SHOWN.
- △ MATERIAL: 0.25MM THICK NICKEL SILVER ALLOY,
- △ FINISH: 0.002 MM MIN TIN DIPPED ON SOLDER PINS

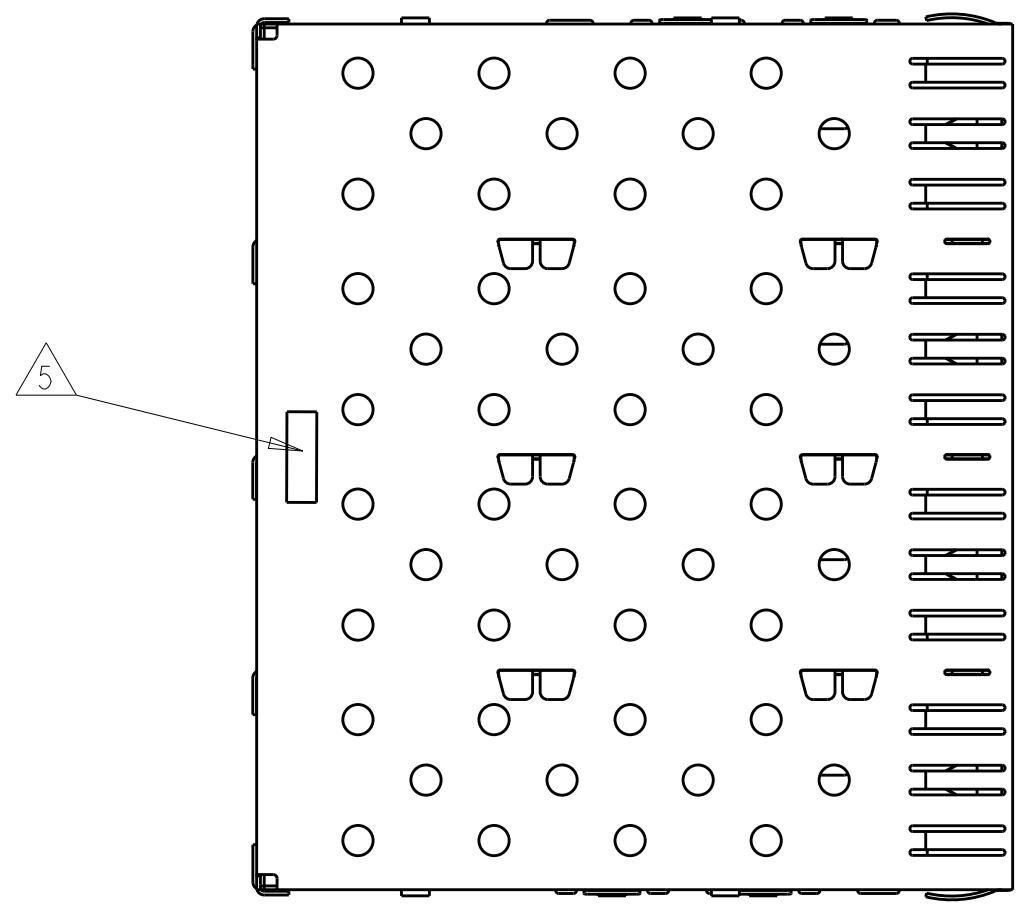

SCALE 2:1

NO	△	1658723-2
△	△	1658723-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	M. SHIRK	13MAY03
DIMENSIONS:		CHK	J. KOPPENHEFFER	06MAY04
mm	0 PLC ±	APVD	M. WALMSLEY	06MAY04
	1 PLC ±0.10	NAME		
	2 PLC ±	PRODUCT SPEC		
	3 PLC ±	108-1950		
	4 PLC ±	APPLICATION SPEC		
	ANGLES ±	SIZE CAGE CODE DRAWING NO		
	FINISH	114-13017		
MATERIAL	△	WEIGHT		
	△	A100779C=1658723		
CUSTOMER DRAWING		RESTRICTED TO		
		SCALE	4:1	SHEET 1 OF 2 REV E2

