


Rail Mount Terminal Blocks

NDN63

SPECIFICATIONS:


Rating: 65A, 600V; UL/CSA
Center Spacing: .375" (9.52 mm)
Number Of Poles: 3
Circuits Per Foot: 30
Circuit Jumper: JN3, 2 circuits
Wire Range: AWG #6-18 CU
Screw Size: #10-32
Mounting Options: 35mm DIN rail, C-rail
Marking Tape: MT12-1/2
Torque Rating: 35 in-lb
Operating Temperature: 105°C

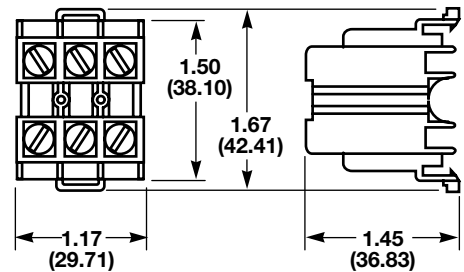

NDN1

SPECIFICATIONS:

Rating: 90A, 600V
Center Spacing: .635" (16.13 mm)
Number Of Poles: 1
Circuits Per Foot: 18
Wire Range: AWG #2-18 CU
Screw Size: #1/4-28
Mounting Options: 35mm DIN rail, C-rail
 * Dove-tail option is available for mounting side-by-side.
 Order part no. NDN1-A
Marking Tape: MT12-1/2
Torque Rating: 32 in-lb
Operating Temperature: 105°C

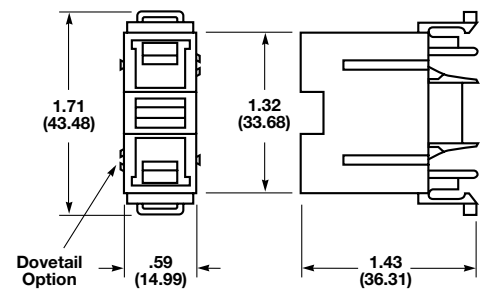

NDN111

SPECIFICATIONS:

Rating: 90A, 600V; UL/CSA
Center Spacing: .635" (16.13 mm)
Number Of Poles: 3
Circuits Per Foot: 18
Circuit Jumper: JN1, 2 circuits
Wire Range: AWG #2-18 CU
Screw Size: #1/4-28
Mounting Options: 35mm DIN rail, C-rail, Base Mount
 * Dove-tail option is available for mounting side-by-side.
 Order part no. NDN111-A
Marking Tape: MT12-1/2
Torque Rating: 32 in-lb
Operating Temperature: 105°C

