

## Front adapters - FLKM S135-460-4UA/I/S400 - 2314613

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The FLKM S135/S400 adapter connects a SIMATIC® S5 plug directly to the SIMATIC® S7 400 base board.  
Conversion: 6ES5 460-4UA13 (current measurement) to 6ES7 431 1KF00-0AB0



### Key commercial data

Packing unit	1 pc
Custom tariff number	85369010
Country of origin	Germany

### Technical data

#### General

Nominal voltage $U_N$	24 V DC
Max. permissible current	4 A (per path)
	4 A (per connection, supply via separate power supply)
Connection type, connector	SIEMENS S5-135 U pin strip
Mounting position	Vertical
Standards/regulations	DIN EN 50178
	IEC 62103

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### Supported controller

Controller	SIEMENS S5-135 U
- suitable I/O card	6ES5 460-4UA13

# Front adapters - FLKM S135-460-4UA/I/S400 - 2314613

## Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27249205
eCl@ss 7.0	27249205
eCl@ss 8.0	27249205

## ETIM


ETIM 2.0	EC000237
ETIM 3.0	EC000237
ETIM 4.0	EC000237
ETIM 5.0	EC002584

## UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

## Drawings

Circuit diagram

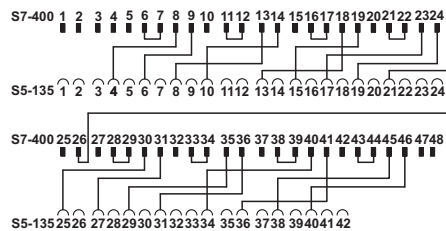

FLKM S135-460-4UA/I/S400 connection scheme