


SPECIFICATION CONTROL DRAWING

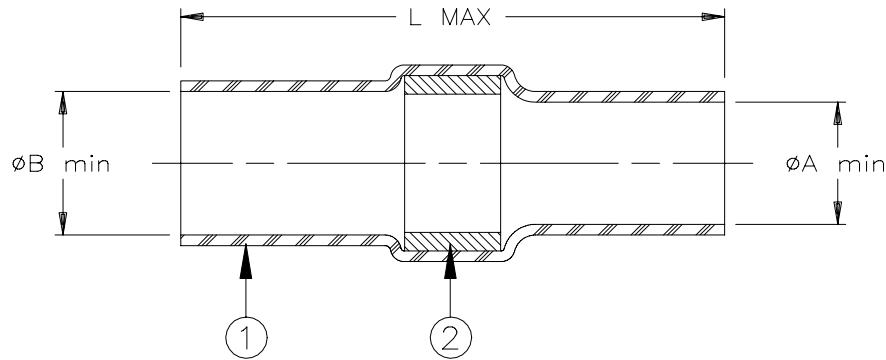

Product Revision		Product Dimensions			Cable Dimensions			
Product Name		L max	øA min	øB min	øD max	øE min	øG max	J±1.3 (J±0.05)
D-107-08	D	20.85 (0.820)	5.95 (0.235)	6.5 (0.255)	6.45 (0.255)	3.20 (0.125)	5.95 (0.235)	7 (0.275)


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Sn63 per ANSI-J-STD-006.
 FLUX: TYPE ROL1 per ANSI-J-STD-004.
 THERMAL INDICATOR: Violet.

APPLICATION

1. This part is designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed, having tin or silver plated copper shields.
2. Install using Raychem-approved convection or infrared tools in accordance with Raychem assembly procedure RCPS-100-70.
3. Temperature range: -55°C to +150°C.

For best results, prepare the cable as shown:

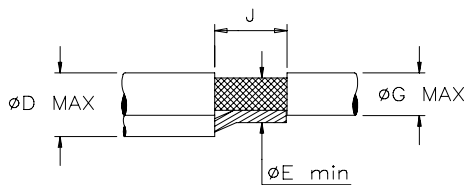

* A trademark of Raychem Corporation.

Raychem		THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	TITLE: SOLDERSLEEVE* SHIELD TERMINATOR			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: D-107-08			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D981830		REPLACES: D961410	
DRAWN BY: M. FORONDA		DATE: 28-Oct-98	PROD. REV. SEE TABLE	DOC ISSUE: 2	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision