


**SAC-10P- 5,0-PUR/M16FR**

Order No.: 1693704

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1693704>Master cable, Number of slots: 6, Number of positions: 10, Status  
indication: No, PUR/PVC, Cable length: 5 m, Shielding: No**Commercial data**

GTIN (EAN)	 4 017918 189044
sales group	D192
Pack	1 pcs.
Customs tariff	85444290
Catalog page information	Page 126 (PC-2009)

**Product notes**WEEE/RoHS-compliant since:  
07/06/2007

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Rated voltage	125 V AC
	150 V DC

Number of positions	10
Number of slots	6
Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (Male connector / female connector)

**Master cable data**

Type of connection	M16 plug connection
Length of cable	5 m
Cable type	Master cable suitable for flexible cable conduit
Signal line cross section	6x 0.34 mm <sup>2</sup>
AWG signal line	22
Conductor structure signal line	42x 0.10 mm
Power supply cross section	2x 0.75 mm <sup>2</sup>
AWG power supply	18
Conductor structure, voltage supply	96x 0.10 mm
External diameter	8.2 mm
Max. bending cycles	1500000
Bending radius	100 mm
Traversing path	2 m
Traversing rate	2 m/s
Ambient temperature (operation)	-40 °C ... 90 °C (for fixed installation)
	-5 °C ... 80 °C (for flexible installation)

**Insulation material**

Housing material	PUR
Material of contact, master cable side	CU alloy
Material of contact surface, master cable side	Gold-plated
Material of the contact carrier on the master cable side	TPU
Material of threaded sleeve	Cu alloy
Material of threaded sleeve surface	Nickel-plated
Sealing material	NBR

**Connection assignment**

Slot/position = pin = conductor color	1 / 4 (A) = P = WH
---------------------------------------	--------------------

	2 / 4 (A) = J = GN
	3 / 4 (A) = T = YE
	4 / 4 (A) = S = GY
	5 / 4 (A) = G = PK
	6 / 4 (A) = R = RD
	1-6 / 1 (+ 120 V) = A+M = BN
	1-6 / 3 (0 V) = L+U = BU

### Certificates / Approvals




Certification

GOST

### Diagrams/Drawings

Circuit diagram

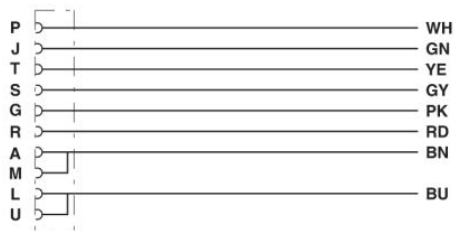

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;